© Siemens AG 2014

Set CEM CERT

Overview

Set CEM CERT is a standardized and certified continuous emission monitoring system which is suitable for use in many plants requiring European legislation (13. BImSchV, 27. BImSchV, TA Luft, 2001/80/EC and IED 2010/75/EC, Annex V) approval. The innovative CEMS meets the current quality standards of EU directives EN 14956, EN 15267 and EN 14181 (QAL1/2/3, AST).

Benefits

- The tested measuring ranges can be selected for a variety of ranges to ensure use in different areas of application for the CEMS (TÜV approved).
- The complete modular package allows the certified use of system components from different manufacturers (TÜV approved).
- Simple and fast to configure
- Very low costs of procurement and operation

Modular design

- Up to 2 analyzers with different measuring ranges can be configured
- Selection of versions for indoor or outdoor installation
- Selection of sample gas cooler and NO_X converter from leading manufacturers
- Electric heaters and air conditioners can be configured to extend the ambient temperature range
- Selection of versions with appropriate sampling probes, heated sample gas lines

Application

- Emission monitoring of power plants fueled with solid, gaseous or liquid fuels
- Emission monitoring of so-called TA Luft plants (e.g. emission monitoring of glass melting furnaces or steel plants)
- Emission monitoring in crematorium facilities (27. BImSchV)

Design

Tested component design

The complete system consists of the following tested individual components:

- Sampling probe: M&C, type: SP2000; Bühler/Siemens, type: GAS222/7MB1943-2F
- Heated sample gas line: Winkler/Siemens, type: 7MB1943-2A
- Temperature controller: Siemens, type: SIRIUS
- Two-stage compressor gas cooler: M&C, type: CSS; Bühler, type: EGK 2-19
- Sample gas pump: Bühler/Siemens, type: P2.3/7MB1943-3C
- NO_X converter: M&C, type: CG-2; Bühler/Siemens, type: BUENOX/7MB1943-2D

Performance-tested measuring ranges

Component		Analyzer module	Smallest certified measuring range	Additional measuring ranges
CO	(in test phase)	U23-7MB2355	0 ... 150 mg/m³	0 ... 750/ 3 000 mg/m³
	(in test phase)	U23-7MB2357	0 ... 150 mg/m³	0 ... 750/ 3 000 mg/m³
		U23-7MB2358	0 ... 250 mg/m³	0 ... 1 250 mg/m³
NO	(in test phase)	U23-7MB2355	0 ... 100 mg/m³	0 ... 750/ 2 000 mg/m³
	(in test phase)	U23-7MB2357	0 ... 100 mg/m³	0 ... 750/ 2 000 mg/m³
		U23-7MB2358	0 ... 400 mg/m³	0 ... 2 000 mg/m³
	(in test phase)	UV600	0 ... 50 mg/m³	0 ... 100/ 1 000/2 000 mg/m³
SO_2	(in test phase)	U23-7MB2355	0 ... 400 mg/m³	0 ... 2 000 mg/m³
	(in test phase)	U23-7MB2357	0 ... 400 mg/m³	0 ... 2 000 mg/m³
		U23-7MB2358	0 ... 400 mg/m³	0 ... 2 000/7 000 (in operation) mg/m³
	(in test phase)	UV600	0 ... 75 mg/m³	0 ... 130/1 500/ 2 000 mg/m³
NO_2	(in test phase)	UV600	0 ... 50 mg/m³	0 ... 500 mg/m³
O_2, (paramag.)		U23	0 ... 25 vol %	
O_2, (electrochem.)		U23	0 ... 25 vol %	

Function

The complete tested modular measuring equipment is composed of the sampling probe, the heated sample gas line, a two-stage sample gas cooler, a gas pump and the multi-component analyzers, ULTRAMAT 23 and SIPROCESS UV600.
An electrochemical or a paramagnetic oxygen measuring cell can be used for the measurement of oxygen.

The gas path splits in parallel after the sample gas cooler. This separately supplies each analyzer with sample gas. One advantage for maintenance is that each analyzer can be individually serviced without affecting the other. The sample gas coolers used have a moisture alarm in case of malfunction. For additional protection, each analyzer is protected by a condensation barrier, which stops the gas flow if moisture penetrates. This guarantees optimum protection for gas analyzers.
For semi-automatic calibration of the zero and calibration gases, a 3/2-way solenoid valve is installed between the first and second cooling stages. The valve can also be used for AUTOCAL calibration of the ULTRAMAT 23 (fully automatic timing) as well as by the integrated PLC (LOGO module).

© Siemens AG 2014

Technical specifications

Climatic conditions	
Ambient temperature	+5° ... +40 °C (standard)
• With heater in sheet-steel cabinet	Min. -5 °C
• With heating in GRP cabinet	Min. -15 °C
• With air-conditioning	Max. +52 °C
Relative humidity	75 % (annual average), non-condensing

Sample gas conditions	
Max. sample gas pressure at inlet to sample preparation system	500 hPa (mbar)
Max. moisture content in sample gas	17 vol % (cooler type: CSS) 25 vol % (cooler type: EGK 2-19)
Sample gas temperature	Max. 200 °C at cabinet entry
Sample gas flow	Approx. 60 l/h per analyzer module
Sampling probe (standard)	Dust load: < 2 g/m^3
	Mounting flange: DN 65, PN 6, form B
	Including temperature controller with Pt100
	With internal sampling tube, stainless steel, length: 1 m (can be shortened)
	With filter in probe, to 600 °C
Sampling probe for higher temperatures and in other materials (optional)	On request
Sample gas line, electrically heated	Max. 35 m, longer lengths on request

Sample gas must not be flammable or explosive.

Power supply	
Supply 1	115 V AC, 50 … 60 Hz (-15 %, +10 %)
Supply 2	230 V AC, 50 … 60 Hz (-15 %, +10 %)
Supply 3	400 V AC, 50 … 60 Hz (-15 %, +10 %)
Power	4 000 VA max.

System design	
Fusing of electronic consumers	1-pole or 2-pole (selectable)
Sample gas cooler	2-stage
Output signals	4 … 20 mA (corresponding to the analyzer information)
	Additional digital inputs and outputs via PLC (LOGO)
Color	RAL 7035
Weight	Approx. 160 kg
Sheet-steel cabinet/frame	Indoor installation
GRP cabinet	Outdoor installation
Explosion protection classification	Installation outside the Ex zone
Degree of protection	IP 54 (avoid direct sunlight for outdoor installation)
Calibration	Semi-automatic; AUTOCAL freely adjustable on U23 up to max. 24-hour interval

Detailed information on the analyzers

You can find detailed information on the analyzers:
- in the "Continuous Gas Analyzers, extractive" chapter
  - ULTRAMAT 23
  - SIPROCESS UV600

Dimensions	
Sheet-steel cabinet (with base) for indoor installation	2 000 x 800 x 800 mm (H x W x D)
GRP cabinet (with base) for indoor installation	2 060 x 900 x 800 mm (H x W x D)

500 mm spacing on the right or left must be provided for the cable inlet and connection of the heated sample gas line.

© Siemens AG 2014

Set CEM CERT

Selection and ordering data

Product description	Article number
Performance-tested emission measuring system (EN 15267) for the continuous emission measurement	↗ **7MB1957-** ■■■■■ - ■■■ **0**
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Rack	
Sheet-steel cabinet (2 100 x 800 x 800 mm), hose/cable inlet left	**0**
Sheet-steel cabinet (2 100 x 800 x 800 mm), hose/cable inlet right	**1**
Control cabinet for outdoor installation (2 060 x 900 x 600 mm), GRP, hose/cable inlet left	**4**
Control cabinet for outdoor installation (2 060 x 900 x 600 mm), GRP, hose/cable inlet right	**5**
Sampling probe	
Sampling probe type: SP2000; Manufacturer: M&C	**B**
Sampling probe type: GAS 222; Manufacturer: Bühler	**C**
Ventilation/cooling	
Cabinet fan with outlet filter	**B**
Cabinet air conditioner for sheet-steel cabinet	**C**
Cabinet air-conditioner for GRP protective cabinet	**D**
Heating	
Without heating	**0**
Cabinet heating	**1**
Fuse protection	
1-pole	**0**
2-pole	**1**
Sample gas cooler	
Compressor gas cooler, type: CSS; Manufacturer: M&C	**1**
Compressor gas cooler, type: EGK 2-19, Manufacturer: Bühler	**2**
NO_2/NO converter	
Without NO_2/NO converter	**A**
NO_2/NO converter, type: CG series; Manufacturer: M&C	**C**
Power supply	
115 V AC, -15 %, +10 %, 50 Hz	**A**
230 V AC, -15 %, +10 %, 50 Hz	**B**
400 V AC, -15 %, +10 %, 50 Hz (3-phase)	**C**
Additional versions	**Order code**
Add "-Z" to article number and then order code	
Accessories	
Preparation for data acquisition system, D-EMS (DURAG)	**A01**
Preparation for dust measurement	**A02**
Condensate tank with level monitoring	**A03**
Acidification module (for measuring low concentrations of SO_2)	**A04**
Extractive analyzers, the analyzers must be ordered separately	
Preparation for the installation of an ULTRAMAT23	**C01**
Preparation for the installation of two ULTRAMAT 23	**C02**
Preparation for the installation of a SIPROCESS UV600	**C03**
Preparation for the installation of two SIPROCESS UV600	**C04**
Preparation for the installation of an ULTRAMAT 23 and a SIPROCESS UV600	**C05**
Sample gas line, electrically heated (with temperature controller and circuit breaker)	
Length: 5 m	**D01**
Length: 10 m	**D02**
Length: 15 m	**D03**
Length: 20 m	**D04**
Length: 25 m	**D05**
Length: 30 m	**D06**
Length: 35 m	**D07**

© Siemens AG 2014

Additional versions	Order code
Electronic overcurrent protection for heated sample gas line (only required when heated sample line is not selected from options D01 to D07)	
Circuit breaker, 4 A, for lengths up to 5 meters	**D21**
Circuit breaker, 6 A, for lengths up to 10 meters	**D22**
Circuit breaker, 8 A, for lengths up to 15 meters	**D23**
Circuit breaker, 10 A, for lengths up to 20 meters	**D24**
Circuit breaker, 16 A, for lengths up to 30 meters	**D25**
Circuit breaker, 20 A, for lengths up to 35 meters	**D26**
Documentation	
German	**N01**
English	**N02**
French	**N03**

Dimensional drawings

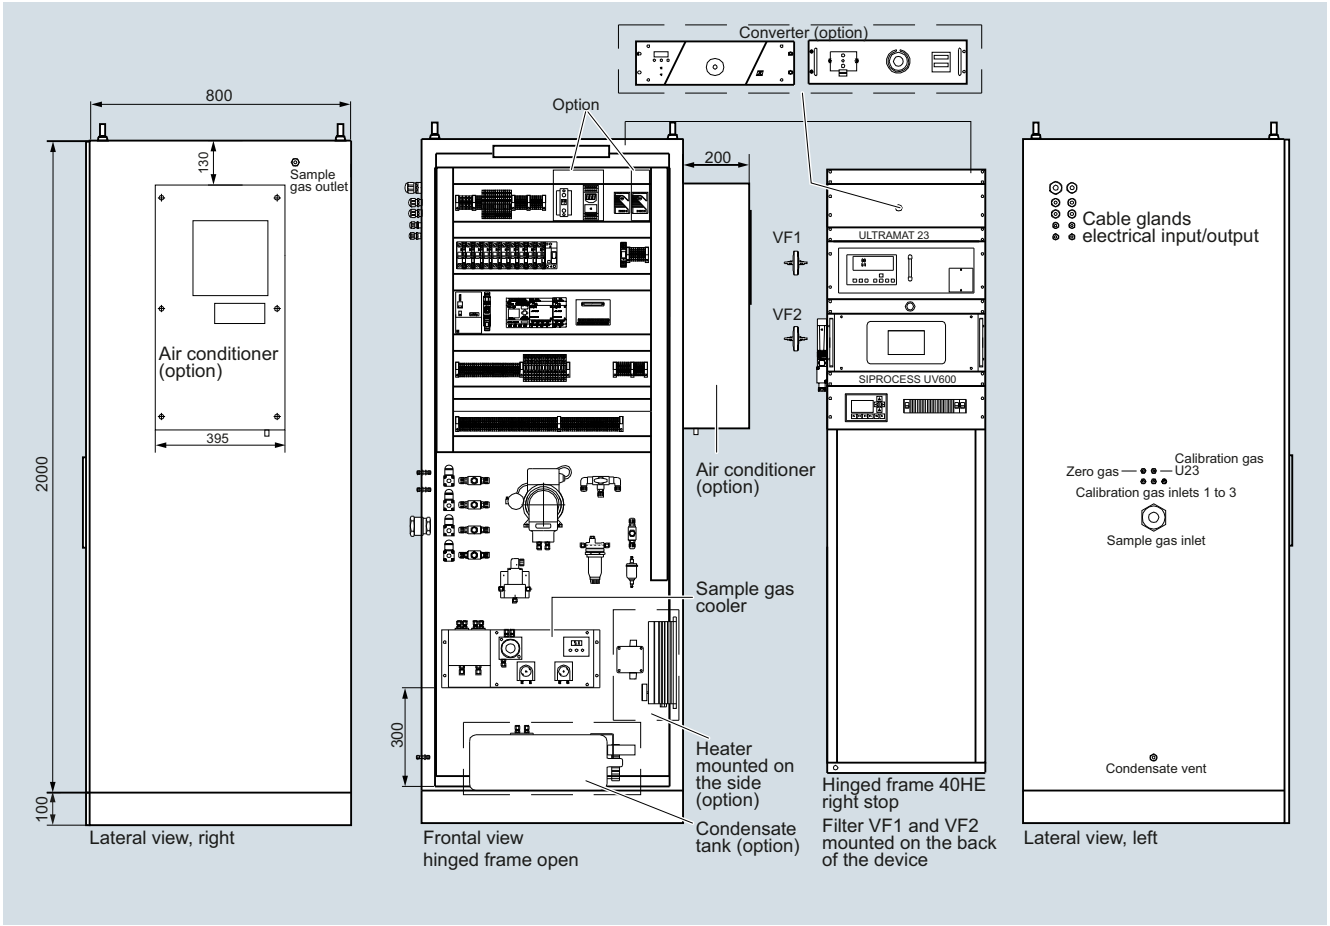

Figure contains options, dimensions in mm

© Siemens AG 2014

Set CEM 1

Overview

The Set CEM 1 is a standardized system specially for monitoring the emission components in flue gases.

Benefits

Standardized complete system

- Highly exact and reliable monitoring of emission components in flue gases. System-specific certificate according to DIN EN ISO 14956 and QAL 1, according to EN 14181.
- Modular complete package with gas sampling system, sample gas preparation system and gas analyzers from one source
- Simple and fast to configure
- Tried and tested, harmonized and reliable set
- Low purchase price and economic operation

Proven, suitability-tested technologies

- Continuous determination of up to eight measured components
- In-situ measurements without sampling and preparation, using LDS 6 laser diode spectrometer
- Use of ULTRAMAT 23 with cleanable cells and automatic calibration with ambient air as well as optional electrochemical oxygen measurement

Optional:

- Paramagnetic oxygen measurement with OXYMAT 6

Simple operation

- Intuitive operation
- Configuration on large displays using plain text, in several languages

Simple maintenance

- Maintenance-friendly cabinet design with hinged frame and uniform design
- Digital display of maintenance requests on LOGO modules

Application

The monitoring of emission components in flue gases is one of the most important topics for continuous gas analysis. This is a result of legislation for monitoring emissions, e.g. for large combustion plants, and also due to the requirements of companies operating process plants who can draw conclusions on the process efficiency from the gas analyses, e.g. with boiler control, DENOX and DESOX plants.

The market requires a reliable complete system which is specially designed for the application. The Set CEM 1 (Continuous Emission Monitoring) offered by Siemens is a system which reliably covers all requirements associated with sampling, sample preparation, and gas analysis.

It is possible to determine the concentrations of the gaseous components CO, CO_2, NO, NOx, SO_2, O_2, C_{total}, HCl, HF, NH_3 and H_2O.

The ULTRAMAT 23 and OXYMAT 6 are used for the extractive, continuous gas analysis.

The standardized Set CEM 1 provides great clarity and simple configuration facilities. Different versions mean that it is possible to appropriately adapt the system to the requirements. Standardization also means that not all imaginable versions can be included, and that it may not be possible to implement special requirements such as armored cables, varying gas compositions, customer-specific documentation or specific conductor labeling without an extra charge.

Design

Starting with a mounting frame with sample preparation system, it is possible to add additional units as options. These include:

- Sampling probe with weather protection hood
- Heated sample gas line (for details see catalog PA11)
- Analyzers
- Air-conditioning unit
- NO_2/NO converter
- Sample preparation extension for an additional ULTRAMAT 23 analyzer
- Single and dual (electrically isolated, not electrically isolated) analog signal processing
- Power supply modules (115 V, 230 V, 400 V)
- Outer panels with steel-plate door or with window
- Single-pole and double-pole fusing
- Condensation bottle
- Coalescence filter

Sampling probe

The standard probe is fitted with a DIN flange DN 65, PN 6. The probe is provided with a regulated heater, and has a power consumption of 400 VA. It is supplied with a weather protection hood and 2 µm filter. The maximum dust concentration at the sampling point should not exceed 2 g/m³. The sampling pipe is 1 000 mm long, is made of stainless steel, and has dimensions of 20 x 1.5 mm. The sample gas temperature must not exceed 600 °C.

It is also possible to purchase the Set CEM 1 without sample probe.

© Siemens AG 2014

Heated sample gas line

The temperature of the heated line is regulated at 200 °C by a temperature controller. The power consumption is 100 VA per meter. The internal core is made of PTFE 4/6. The heated line can be up to 35 m in length. Lengths greater than 35 m can be provided upon special request. If desired, the system can also be supplied without a heated sample gas line.

Mounting frame

The basis of each CEM 1 set is the mounting frame with hinged frame (40 HU) for installation of up to five 19" rack units. The mounting frame includes a standardized sample preparation system designed for an ULTRAMAT 23.

The sample preparation system includes a 3/2-way solenoid valve, 3-way switchover ball valve, regulating valve, corrosion-resistant sample gas pump (power consumption 60 VA), condensation trap, room air suction filter with filter element, LOGO for digital display of individual signals in the cabinet, 24 V DC power supply unit (power consumption 70 VA). Also included are a sample gas cooler (power consumption 200 VA) with integral heat exchanger, hose pump, moisture sensor with flow cell and Teflon filter. Teflon tubes connect the components.

The external dimensions without plinth are 2 000 x 800 x 800 mm (H x W x D). A cabinet depth of 600 mm is also optionally available (not suitable for LDS 6). Hoses and cables can be connected from the left or right. A distance of 500 mm must be provided on the left or right at the installation site for introduction of the hoses and cables.

In addition to the sheet-steel mounting frames for indoor installation, an FRP version is also available for outdoor use. The FRP cabinet is always provided complete with side panels and plinth. The external dimensions are 2 080 x 800 x 600 mm (H x W x D). The GRP cabinet cannot be combined with the LDS 6.

Preparation of sample preparation system for second ULTRAMAT 23

The standard system with sample preparation system and electronics is prepared for one ULTRAMAT 23. If a second ULTRAMAT 23 is to be fitted, this option must be selected so that the sample preparation system and electronics are extended accordingly.

Additional filter

In addition to the fine filter and moisture filter which are always present, a coalescence filter can be optionally fitted in the sample preparation system.

Side panels with doors

Optional outer panels can be selected for the sheet-steel mounting frames. This possibility allows use of the CEM 1 set in analysis cabinets as a rack design on one hand, or on the other as a cabinet design in halls requiring degree of protection IP54. Either a sheet-steel door without window or a glass door can be selected.

Base

Plinths with a height of 100 and 200 mm are additionally available.

Cabinet cooling and ventilation

Optionally available are a fan with outlet filter, an air-conditioning unit for indoor installation, and an air-conditioning unit for outdoor installation. The system can be ordered without a fan or air-conditioning unit if the side panels and the door with window are omitted.

The fan with outlet filter has a power consumption of 60 VA, and is fitted in the cabinet wall. The delivery also includes a thermostat with a power consumption of 25 VA.

The air-conditioning unit has a cooling power of 820 VA.

Frost protection heater

The power consumption of the optional cabinet heater is 500 VA. The delivery includes a thermostat with a power consumption of 25 VA for controlling the frost protection heater.

Fusing of the analog signals

In addition to single-pole fusing of the electronic consumers, it is possible to provide double-pole fusing.

The double-pole fuse is mainly required in Benelux countries.

Removal of condensation

A 19 liter condensation bottle can be provided as an option. It is also possible to order the system without a condensation bottle if the condensation can be removed on-site.

NO_2/NO converter

The mounting frame and cabinets can be optionally extended by a 19" rack unit with NO_2/NO converter with carbon cartridge. The power consumption is 520 VA. The flow rate is 90 l/h. An NO_2/NO converter is required if the share of NO_2 in the total NO_x is greater than 5% and/or if total NO_x is to be always determined.

Power supply

The system can be designed either for 115 V AC, 230 V AC or 400 V AC (-15 %, +10 %) with 50 or 60 Hz.

Three phases, neutral and ground must be provided by the customer at 400 V AC.

Analog signal processing

As standard, the analog signals are simply connected to isolating terminals. As an option, the analog signals can be processed twice without electrical isolation by a diode module, or twice with electrical isolation.

Analyzers

The standardized set is prepared for an ULTRAMAT 23. The system can be supplemented by a second ULTRAMAT 23, OXYMAT 6 and/or LDS 6. Various measured components and measuring ranges can be selected. Other combinations of measured components and measuring ranges are available on request, but you must check that the desired certificates and approvals are available. The analyzers, measured components and measuring ranges used are described briefly below.

Details on the analyzers, alternative components and ranges can be found under the topics "Continuous gas analyzers, extractive" and "Continuous gas analyzers, in-situ".

ULTRAMAT 23: CO, NO

For measuring two infrared components.

Component	Smallest tested measuring range	Switchable to
CO	0 ... 150 mg/Nm³	0 ... 750 mg/Nm³
NO	0 ... 100 mg/Nm³	0 ... 500 mg/Nm³

One or two measuring ranges can be freely set within the limits. The ULTRAMAT 23 carries out automatic self-calibration with ambient air. The power consumption is 60 VA.

© Siemens AG 2014

Set CEM 1

ULTRAMAT 23: CO, NO, SO_2

For measuring three infrared components.

Component	Smallest tested measuring range	Switchable to
CO	0 ... 250 mg/Nm³	0 ... 1 250 mg/Nm³
NO	0 ... 400 mg/Nm³	0 ... 2 000 mg/Nm³
SO_2	0 ... 400 mg/Nm³	0 ... 2 000 mg/Nm³

One or two measuring ranges can be freely set within the limits. The ULTRAMAT 23 carries out automatic self-calibration with ambient air. The power consumption is 60 VA.

ULTRAMAT 23: CO, NO, CO_2

For measuring three infrared components.

Component	Smallest tested measuring range	Switchable to
CO	0 ... 250 mg/Nm³	0 ... 1 250 mg/Nm³
NO	0 ... 400 mg/Nm³	0 ... 2 000 mg/Nm³
CO_2	0 ... 5 %	0 ... 25 %

One or two measuring ranges can be freely set within the limits. The ULTRAMAT 23 carries out automatic self-calibration with ambient air. The power consumption is 60 VA.

The component CO_2 has not been type approved by the TÜV.

ULTRAMAT 23: CO_2

For measuring one infrared component.

Component	Smallest measuring range	Largest measuring range
CO_2	0 ... 5 %	0 ... 25 %

One or two limits can be freely set within the limits. The ULTRAMAT 23 carries out automatic self-calibration with ambient air. The power consumption is 60 VA.

The component CO_2 has not been type approved by the TÜV.

The ULTRAMAT 23 analyzers can be optionally equipped with an electrochemical oxygen sensor.

O_2: Tested measuring ranges 0 to 10/25%

OXYMAT 6: O_2

For paramagnetic measurement of oxygen. Instead of ULTRAMAT 23 with electrochemical cell.

O_2: Tested measuring ranges 0 to 10/0 to 25%

Sample chamber without flow-type compensation branch, made of stainless steel 1.4571.

LDS 6: HCl

Component	Smallest tested measuring range
HCl	0 ... 15 mg/Nm³

Application for channel 1: Emission monitoring

The power consumption is 50 VA. Suitable for connection of non-Ex sensors, including non-Ex-protected sensor electronics.

The delivery includes a pair of sensors for instrument air or N_2 on the process side. The pair of sensors is designed for a moderate flow rate of 0 to 120 l/min. The 400 mm long purging tubes are made of stainless steel. The process connection is DN 65, PN 6. The power consumption is 2 VA.

Limitation:
Applies to measurement paths > 2 000 mm, applies to gases with a methane content < 15 mg/m³. Necessary gas temperature between 120 and 210 °C.

LDS 6: HCl / H_2O

Component	Smallest tested measuring range
HCl	0 ... 15 mg/Nm³
H_2O	0 ... 30 %

Application for channel 1: Emission monitoring

The power consumption is 50 VA. Suitable for connection of non-Ex sensors, including non-Ex-protected sensor electronics.

The delivery includes a pair of sensors for instrument air or N_2 on the process side. The pair of sensors is designed for a moderate flow rate of 0 to 120 l/min. The 400 mm long purging tubes are made of stainless steel. The process connection is DN 65, PN 6. The power consumption is 2 VA.

Limitation:
Applies to measurement paths > 2 000 mm, applies to gases with a methane content < 15 mg/m³. Necessary gas temperature between 120 and 210 °C.

LDS 6: HF

HF: Smallest possible measuring range depends on the gas composition.

Application for channel 1: Emission monitoring

The power consumption is 50 VA. Suitable for connection of non-Ex sensors, including non-Ex-protected sensor electronics.

The delivery includes a pair of sensors for instrument air or N_2 on the process side. The pair of sensors is designed for a moderate flow rate of 0 to 120 l/min. The 400 mm long purging tubes are made of stainless steel. The process connection is DN 65, PN 6. The power consumption is 2 VA. The HF measurement has not been type approved by the TÜV.

Limitation:
Component has not been type approved by TÜV. Necessary gas temperature between 0 and 150 °C.

LDS 6: HF/H_2O

HF: Smallest possible measuring range depends on the gas composition.

H_2O: Smallest tested measuring range 0 to 30%

Application for channel 1: Emission monitoring

The power consumption is 50 VA. Suitable for connection of non-Ex sensors, including non-Ex-protected sensor electronics.

The delivery includes a pair of sensors for instrument air or N_2 on the process side. The pair of sensors is designed for a moderate flow rate of 0 to 120 l/min. The 400 mm long purging tubes are made of stainless steel. The process connection is DN 65, PN 6. The power consumption is 2 VA. The HF measurement has not been type approved by the TÜV.

Limitation:
Component has not been type approved by TÜV. Necessary gas temperature between 0 and 150 °C.

© Siemens AG 2014

LDS 6: NH_3

Component	Smallest tested measuring range
NH_3	0 ... 20 mg/Nm³

Application for channel 1: Emission monitoring

The power consumption is 50 VA. Suitable for connection of non-Ex sensors, including non-Ex-protected sensor electronics.

The delivery includes a pair of sensors for instrument air or N_2 on the process side. The pair of sensors is designed for a moderate flow rate of 0 to 120 l/min. The 400 mm long purging tubes are made of stainless steel. The process connection is DN 65, PN 6. The power consumption is 2 VA.

Limitation:
Applies to measurement paths > 1 250 mm. Necessary gas temperature between 0 and 150 °C.

LDS 6: NH_3/ H_2O

Component	Smallest tested measuring range
NH_3	0 ... 20 mg/Nm³
H_2O	0 ... 15 %

Application for channel 1: Emission monitoring

The power consumption is 50 VA. Suitable for connection of non-Ex sensors, including non-Ex-protected sensor electronics.

The delivery includes a pair of sensors for instrument air or N_2 on the process side. The pair of sensors is designed for a moderate flow rate of 0 to 120 l/min. The 400 mm long purging tubes are made of stainless steel. The process connection is DN 65, PN 6. The power consumption is 2 VA.

Limitation:
Applies to measurement paths > 1 250 mm. Necessary gas temperature between 0 and 150 °C.

Hybrid cable

A hybrid cable is required to connect a central unit to one pair of sensors. Versions for 5, 10, 25, 40 and 50 m are available. Cable lengths cannot be combined. Lengths greater than 50 m can be ordered on request.

Sensor cable

A sensor cable is required to connect one pair of sensors. Versions for 5, 10 and 25 m are available. Cable lengths cannot be combined. Lengths greater than 25 m can be ordered on request.

Electrical preparation for dust measurement

Electrical preparation for connection of an external dust measurement to the system (contains a switch amplifier).

Electrical preparation for flow measurement

Electrical preparation for connection of an external flow measurement to the system (contains a switch amplifier).

Electrical preparation for pressure measurement

Electrical preparation for connection of an external pressure measurement to the system (contains a switch amplifier).

Electrical preparation for temperature measurement

Electrical preparation for connection of an external temperature measurement to the system (contains a switch amplifier).

Electrical preparation for emission data memory on rail module

On request.

Electrical preparation for emission data memory in 19" rack unit

On request.

Additional LOGO for four or more 19" rack units

Sets with more than three 19" rack units integrated require a LOGO extension module. The delivery also includes connection and programming.

Core end labeling

It is optionally possible to order core end labeling according to the Siemens standard (VDE 0100 Part 200).

Documentation

The Siemens standard documentation is available in German or English.

The documentation includes gas path diagram, circuit diagram, terminal diagram, installation diagram, consumable materials list, signal list, cable list, and parts list. Also included are technical data sheets and Operating Instructions for the components and devices used. The documentation language for parts provided by other suppliers may deviate. Plant description, LOGO program and test certificates are also included in the documentation.

The documentation contains no customer-specific/project-specific drawings, and consists of two folders and one CD per set.

© Siemens AG 2014

Set CEM 1

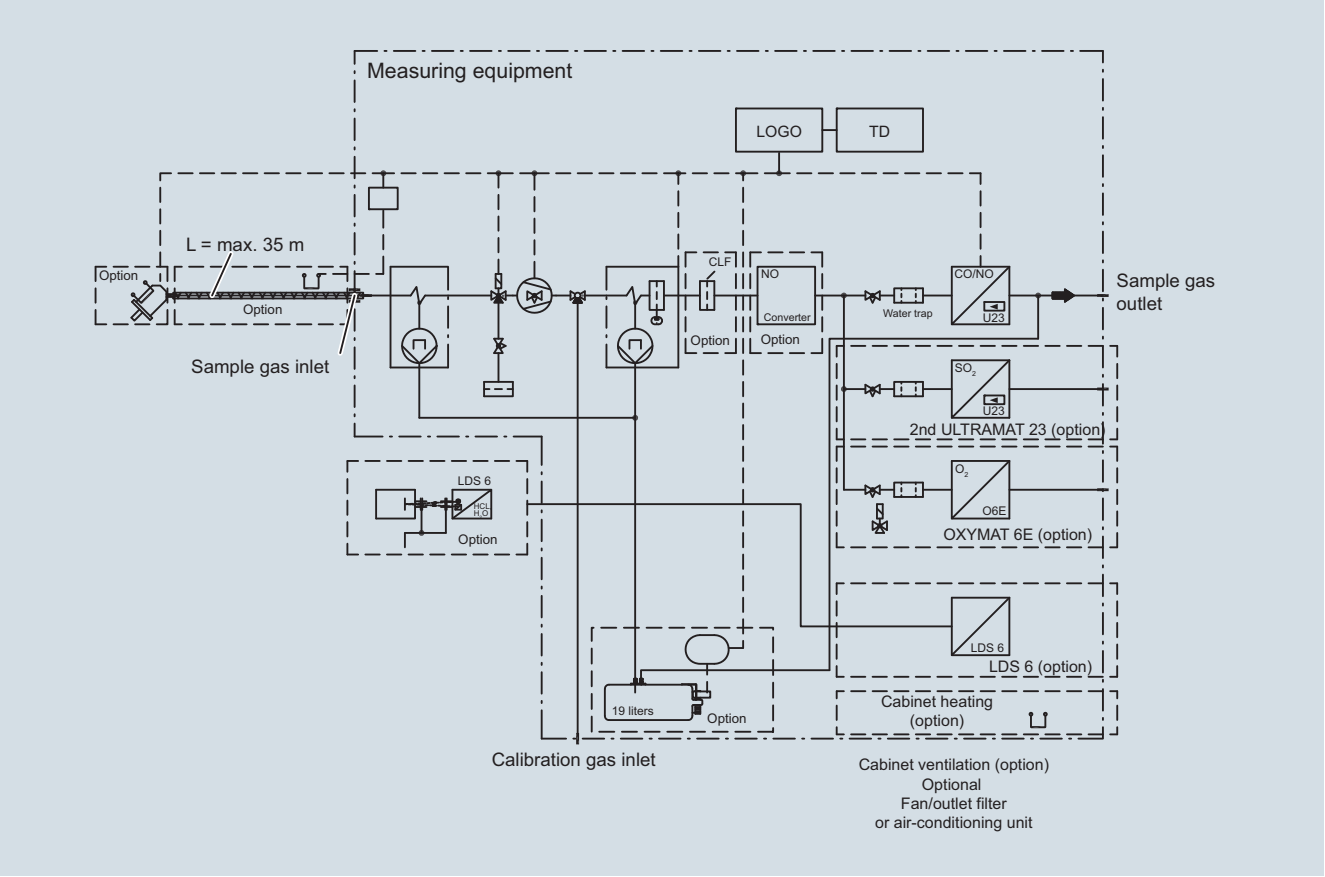

Set CEM 1, gas flow chart, figure contains options

© Siemens AG 2014

Function

A sample is extracted via the heated sample gas probe. The dust concentration may be up to 2 g/m³, the sample gas temperature up to 600 °C. The gas is transported to the analysis cabinet via a heated sample gas line. The heating prevents condensate. The gas cooler cools and dries the sample in the analysis cabinet. Condensate is drained. The level in the condensate trap is monitored. For safety purposes, a coalescence filter can be provided in addition to the fine filter and moisture filter which are always present. The sample gas is analyzed by analyzers such as the ULTRAMAT 23, OXYMAT 6 and LDS 6. The ULTRAMAT 23 operates on the basis of molecular-specific absorption of infrared radiation or with an electrochemical oxygen measuring cell. The OXYMAT 6 is an analyzer for paramagnetic oxygen measurements. The in-situ LDS 6 laser diode spectrometer operates according to the molecular-specific absorption of near-IR radiation. The delivery may also include an NO_2/NO converter which permits measurement of total nitrogen oxides. In order to qualify the set for low or high temperature ranges (-5, +45 °C), it is possible to use a cabinet heater or air-conditioning unit. Power supply versions are available for 115, 230 or 400 V AC. Electronic consumers can be provided with single-pole or double-pole fusing. The components of the sample preparation system and the analyzers are connected to LOGO modules via a binary signal, and transmit maintenance requirements. The analog signals can be processed either singly or twice. Electrical isolation is additionally possible for the double processing.

Technical specifications

Climatic conditions	
Ambient temperature	0 ... 35 °C
• With heater in sheet-steel cabinet	Min. -5 °C
• With heating in GRP cabinet	Min. -15 °C
• With air-conditioning	Max. 52 °C
Relative humidity	70 %, non-condensing
Corrosive atmosphere	No
Gas inlet conditions	
Max. sample gas pressure at inlet to sample preparation system	500 hPa (mbar)
Max. moisture content in sample gas	17 vol-% [1]
Max. water dew point	60 ?
Min. sample gas pressure at inlet to sample preparation system	180 °C
Dust content at inlet to sample preparation system	Dust-free
Sampling probe	Sampling tube 20 x 1.5, 1 000 mm long, stainless steel, flange: DN 65, PN 6
Max. sample gas pressure at sampling probe	500 hPa (mbar)
Max. sample gas temperature at sampling probe	600 °C
Max. dust content at sampling probe	2 g/Nm³
Sample gas must not be flammable or explosive.	
Power supply	
Supply 1	115 V AC (-15 %, +10 %)
Supply 2	230 V AC (-15 %, +10 %)
Supply 3	400 V AC (-15 %, +10 %)
Connections	
Hose material	Teflon
Cables	Not armored, not halogen-free
Electrical design	According to IEC
Cable ID	Individual core labeling as option
Fusing of electronic consumers	1-pole; 2-pole as option
Duplication of analog signals	• Not electrically isolated as option • Electrically isolated as option
Installation	
Site	
• In sheet-steel cabinet/frame	Indoor installation
• In GRP cabinet	Outdoor installation
Ex zone	Non-Ex area
System design	
Type	Mounting frame or cabinet
Cabinet degree of protection	IP54
Automatic calibration	Yes, with ULTRAMAT 23

Detailed information on the analyzers

You can find detailed information on the analyzers:
- In the "Continuous Gas Analyzers, extractive" chapter
  - ULTRAMAT 23
  - OXYMAT 6
- In the "Continuous Gas Analyzers, in-situ" Chapter
  - LDS 6

Dimensions (without plinth)	
Depth of sheet-steel frame	
• 800 mm (without plinth)	2 000 x 800 x 800 mm (H x W x D)
• 600 mm (without plinth)	2 000 x 800 x 600 mm (H x W x D)
GRP cabinet (with plinth)	2 080 x 900 x 600 mm (H x W x D)

It is necessary to provide a 500 mm gap to the right or left for the tube or cable inlet.
Use of the LDS 6 requires a cabinet with a depth of 800 mm.

[1] Higher performance sample gas coolers can be offered upon request (not TÜV suitability-tested). A higher performance cooler is generally required for high sulfide content in fuels (e.g. heavy oil).

© Siemens AG 2014

Set CEM 1

Selection and ordering data	Article No.	Cannot be combined
Set CEM 1 – Continuous Emission Monitoring ↗	**7MB1953-** ■■■■■ - ■■■■	
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Rack		
Rack 1: 2 000 x 800 x 800 mm (H x W x D), with sample preparation device, with hinged frame 40 HU, hose/cable inlet on left side, with lighting, prepared for 1 x ULTRAMAT 23, max. five 19" rack units possible	**0**	**A03, A04, B02, B04**
Rack 2: 2 000 x 800 x 800 mm (H x W x D), with sample preparation device, with hinged frame 40 HU, hose/cable inlet on right side, with lighting, prepared for 1 x ULTRAMAT 23, max. five 19" rack units possible	**1**	**A03, A04, B02, B04**
Rack 3: 2 000 x 800 x 600 mm (H x W x D), with sample preparation device, with hinged frame 40 HU, hose/cable inlet on left side, with lighting, prepared for 1 x ULTRAMAT 23, max. five 19" rack units possible, not suitable for LDS 6	**2**	**A01, A02, B01, B03, E01 ... E06, F01 ... F06, G01 ... G04**
Rack 4: 2 000 x 800 x 600 mm (H x W x D), with sample preparation device, with hinged frame 40 HU, hose/cable inlet on right side, with lighting, prepared for 1 x ULTRAMAT 23, max. five 19" rack units possible, not suitable for LDS 6	**3**	**A01, A02, B01, B03, E01 ... E06, F01 ... F06, G01 ... G04**
Rack 5: 2 060 x 900 x 600 mm (H x W x D), GRP, base 80 mm, with sample preparation device, with hinged frame 40 HU, hose/cable inlet on left side, with lighting, prepared for 1 x ULTRAMAT 23, with side panels, incl. door with window, max. five 19" rack units possible, not suitable for LDS 6	**4**	**A01 ... A04, B01 ... B04, E01 ... E06, F01 ... F06, G01 ... G04**
Rack 6: 2 060 x 900 x 600 mm (H x W x D), GRP, base 80 mm, with sample preparation device, with hinged frame 40 HU, hose/cable inlet on right side, with lighting, prepared for 1 x ULTRAMAT 23, with side panels, incl. door with window, max. five 19" rack units possible, not suitable for LDS 6	**5**	**A01 ... A04, B01 ... B04, E01 ... E06, F01 ... F06, G01 ... G04**
Sampling probe		
Without	**A**	
Standard sampling probe	**B**	
Ventilation/cooling		
Without	**A**	
Fan with outlet filter	**B**	
Cabinet air-conditioning unit	**C**	
Cabinet air-conditioning unit for GRP rack	**D**	
Heating		
Without	**0**	
Cabinet heating	**1**	
Fuse protection		
1-pole	**0**	
2-pole	**1**	
Removal of condensation		
Without	**0**	
19 l container with level monitoring	**1**	
NO_2/NO converter		
Without	**A**	
NO_2/NO converter	**B**	
Power supply		
115 V AC, -15 %, +10 %, 50 or 60 Hz	**A**	
230 V AC, -15 %, +10 %, 50 or 60 Hz	**B**	
400 V AC, -15 %, +10 %, 50 or 60 Hz (3 phases, neutral, ground provided by customer)	**C**	
Connection set for heated line		
Without controller	**0**	
Standard controller (max. 35 m heated line can be connected)	**1**	
Note: The heated sample gas line must be ordered separately using Catalog PA 11.		

© Siemens AG 2014

Additional versions	**Order code**
Add "-Z" to Article No. and specify Order code	
Bases	
Base for rack 1, 2, height 100 mm	**A01**
Base for rack 1, 2, height 200 mm	**A02**
Base for rack 3, 4, height 100 mm	**A03**
Base for rack 3, 4, height 200 mm	**A04**
Rack accessories	
Outer panel painted, for rack 1 and 2, viewing door	**B01**
Outer panel painted, for rack 3 and 4, viewing door	**B02**
Outer panel painted, for rack 1 and 2, sheet steel door	**B03**
Outer panel painted, for rack 3 and 4, sheet steel door	**B04**
ULTRAMAT 23, OXYMAT 6 extractive analyzers	
ULTRAMAT 23: CO, NO	**C01**
ULTRAMAT 23: CO, NO, SO_2	**C02**
ULTRAMAT 23: CO, NO, CO_2	**C03**
ULTRAMAT 23: CO_2	**C04**
ULTRAMAT 23: Electrochemical O_2 sensor for ULTRAMAT 23 expansion	**C05**
OXYMAT 6: OXYMAT paramagnetic O_2 analyzer	**C06**
Preperation for free choice ULTRAMAT 23 analyzer	**C07**
Additional sample preparation components	
Coalescence filter	**D02**
LDS 6 in-situ analyzers	
HCl including sensor pair	**E01**
HCl/H_2O including sensor pair	**E02**
HF including sensor pair, not suitability-tested	**E03**
HF/H_2O including sensor pair, not suitability-tested	**E04**
NH_3 including sensor pair	**E05**
NH_3/H_2O including sensor pair	**E06**
LDS 6 hybrid cable per LDS 6	
5 m	**F01**
10 m	**F02**
25 m	**F03**
40 m	**F04**
50 m	**F05**
Customer-specific > 50 m	**F06**
LDS 6 connecting cable per LDS 6	
5 m	**G01**
10 m	**G02**
25 m	**G03**
Customer-specific > 25 m	**G04**
Electrical preparation	
Preparation for dust measurement	**J01**
Preparation for flow measurement	**J02**
Preparation for pressure measurement	**J03**
Preparation for temperature measurement	**J04**
Preparation for emission data memory – DIN rail module (on request)	**J05**
Preparation for emission data memory – 19" rack unit (on request)	**J06**
Additional LOGO	
LOGO for a third and fourth 19" rack unit	**K01**

© Siemens AG 2014

Set CEM 1

Additional versions	Order code
Core end labeling	
Single-core labeling Siemens standard	**L01**
Analog signal processing	
Double, galvanically connected, 1 x per analog signal	**M01**
Double, galvanically isolated, 1 x per analog signal	**M02**
Documentation	
German	**N01**
English	**N02**
French (on request)	**N03**

Dimensional drawings

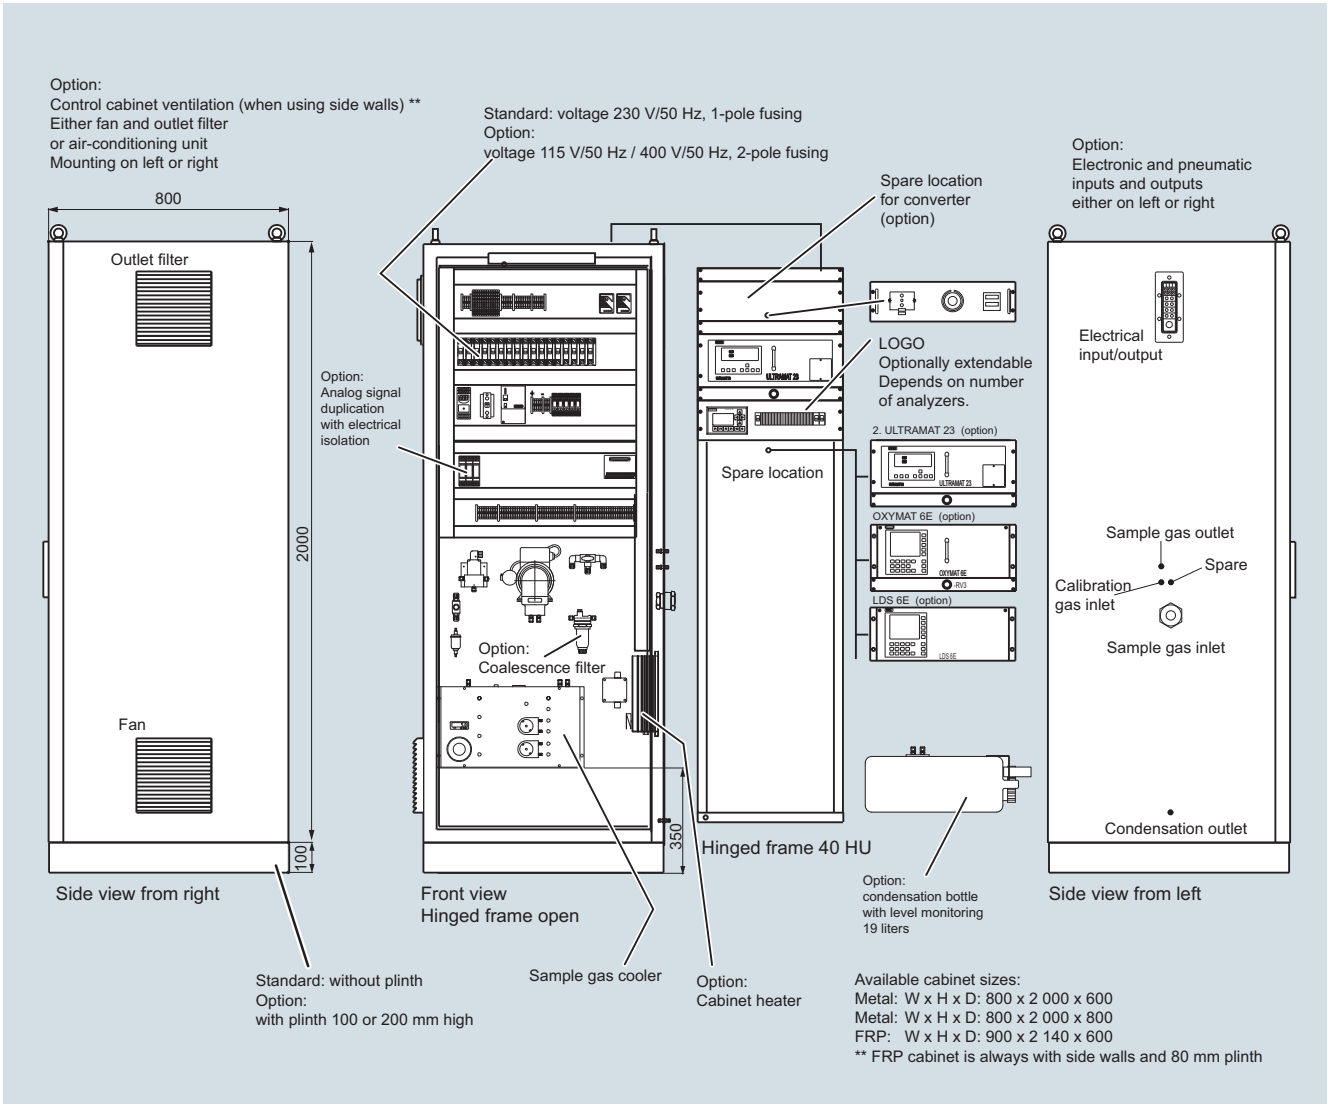

Design of the Set CEM 1, figure contains options, dimensions in mm

© Siemens AG 2014

Overview

Gasmet CEMS is another FTIR-based, standardized complete system for continuous, simultaneous measurement of a large number of emission components in flue gases from power stations and waste incinerators.

Benefits

Standardized complete system

- Highly accurate and reliable monitoring of emission components in flue gases
- Modular complete package with gas sampling system, hot sample processing, measurement at 180 °C, data processing and analysis
- Numerous analog and digital signal I/Os
- Simultaneous multicomponent analysis of 16 gas components as standard:
  CO, CO_2, HCl, HF, H_2O, NH_3, NO, NO_2, N_2O, SO_2, CH_4, C_2H_4, C_2H_6, C_3H_8, C_6H_{14}, HCOH
- Additionally calculated from the FTIR measurement: NO_x and total carbon values
- Approval for FTIR-based emission measurements (QAL 1 in accordance with EN 14181) possible for ten measured components
- Can be expanded with one or two additional analyzers for measuring oxygen and for FID-based total carbon measurement (also with QAL 1 approval, if required)
- Simple and fast to configure
- Tried and tested, harmonized and reliable set
- Low purchase price and economic operation

Proven, performance-tested technologies

- Continuous determination of up to eleven measured components
- Simultaneous FTIR measurement for CO, CO_2, HCl, H_2O, NH_3, NO, NO_2, N_2O and SO_2
- Optionally: Use of a QAL1 certified ZrO_2 oxygen analyzer with hot sample feed
- Optionally: FID-based total organic carbon measurement with FIDAMAT 6

Simple operation

- Intuitive operation
- Configuration on a large TFT display using keyboard

Easy maintenance

- Maintenance-friendly cabinet design with 19'' telescopic rails
- Digital display of maintenance requirements

Application

The measurement and monitoring of emission components in flue gases is one of the most important topics for continuous gas analysis. This is a result of legislation for monitoring emissions, e.g. for waste incinerators, and also due to the requirements of companies operating process plants who can draw conclusions on process efficiency from the gas analyses, e.g. with boiler and oven controls, $DeNO_x$ and $DeSO_x$ plants.

The market requires a reliable complete system which is specially designed for the application. The Gasmet CEMS (Continuous Emission Monitoring System) offered by Siemens is an extractive and continuous gas probe measuring system based on established FTIR spectroscopy method. It reliably covers all requirements associated with sampling, sample processing, and gas analysis.

The concentration of the following gas components can be determined on the basis of FTIR: CO, CO_2, HCl, HF, H_2O, NH_3, NO, NO_2, N_2O, SO_2, CH_4, C_2H_4, C_2H_6, C_3H_8, $C_6H_{14}$and HCOH. The FTIR measurement can also be used to derive additional values for total organic carbon and NO_x. In addition, the Gasmet CEMS offers space for an optional ZrO_2 oxygen analyzer as well as a FIDAMAT 6 for determining total organic carbon levels (also QAL1 certified, if required).

The standardized Gasmet CEMS provides great clarity and simple configuration facilities. Different versions facilitate individual adaptation to the system requirements in hand. Standardization, however, also means that not all imaginable versions can be included, and that it may not always be possible to implement particular requirements such as armored cables, customer-specific documentation or special conductor labeling without an extra charge.

© Siemens AG 2014

Design

The Gasmet CEMS is a fully equipped FTIR analysis system comprising several 19'' rack units:

- A sampling unit with sample gas pump and controller for the heated sample gas lines,
  - internally, from the sampling unit to the analyzer (included in the scope of supply)
  - externally, from the sampling probe to the analysis cabinet (optional)
- The actual FTIR spectrometry system with gas cuvette
- An industrial PC as analysis and operator input unit, including keyboard and TFT display

Options for expanding the system include:

- A sampling probe
- A heated sample gas line (from the sampling probe to the analysis cabinet)
- Additional analyzers (maximum 2)
  - ZrO_2 oxygen analyzer
  - FIDAMAT 6 for total carbon measurement

Sampling probe

The Gasmet CEMS is supplied as standard without a sampling probe.

A suitable stainless steel (SS 316) probe with DN 65 PN 6 flange that can be heated to 180 °C is recommended as a sampling probe for the Gasmet CEMS. This can be offered separately on request.

Since particles of dust can usually be expected in sample gas, you are strongly recommended to use a sampling probe with a suitable (pre-)filter element and/or backflushing facility, especially with dust concentrations > 2 g/m^3.

The sample gas temperature should usually not exceed 600 °C; the sample gas pressure must be between 400 and 6 000 hPa.

For performance-tested applications, a sampling probe matched to the Gasmet CEMS must be used (e.g. M&C SP2000H or comparable). This can be offered separately on request.

Heated sample gas line

The Gasmet CEMS is supplied as standard with heated sample gas lines between the sampling unit in the Gasmet CEMS analysis cabinet and the FTIR analyzer.

Further internal sample gas lines to the optional ZrO_2 and/or FID analyzers can be ordered additionally.

The external sample gas line from the sampling probe to the sampling unit in the analysis cabinet of the Gasmet CEMS is not included in the standard scope of delivery of the system.

All heated sample gas lines (external and internal) are regulated to 180 °C in the temperature controller integrated into the Gasmet CEMS sampling unit.

The external sample gas line can be heated as required and must therefore be designed for approx. 200 °C. It must have a power consumption of 120 VA per meter, and it must use K-type temperature sensors (Ni-Cr-Ni). The length of the heated line must not exceed 30 m.

Lengths greater than 30 m can be provided on special request, or they can be implemented via an additional temperature control unit.

For the external, heated sample gas line, a replaceable inner lining made from PTFE with a 4 mm inner diameter and 6 mm outer diameter is recommended. The connections must be Swagelok 6 mm. For steric reasons, the outer diameter of the sample gas line including preassembly on the side of the connection to the Gasmet CEMS sampling unit must be less than 43 mm.

Gasmet CEMS sampling unit

The sampling unit is designed for hot-extractive sampling of wet, corrosive gas streams, and is integrated into the Gasmet CEMS as a 19" rack unit.

It encompasses all valves, flow meters, sample gas pumps and filters required for the measuring task. The temperature of all parts coming into contact with the sample gas (pumps, filters and lines) is stabilized to 180 °C.

The sample gas does not have to be diluted and does not have to be dried beforehand either. The gas flow and the pressure of the instrument air supply can be monitored via the Gasmet CEMS sampling unit by means of an alarm.

The sampling unit is connected to the control PC and is controlled using the Calcmet software, like the FTIR and the other (optional) analyzers.

Gasmet CEMS sampling unit with removed filter insert

© Siemens AG 2014

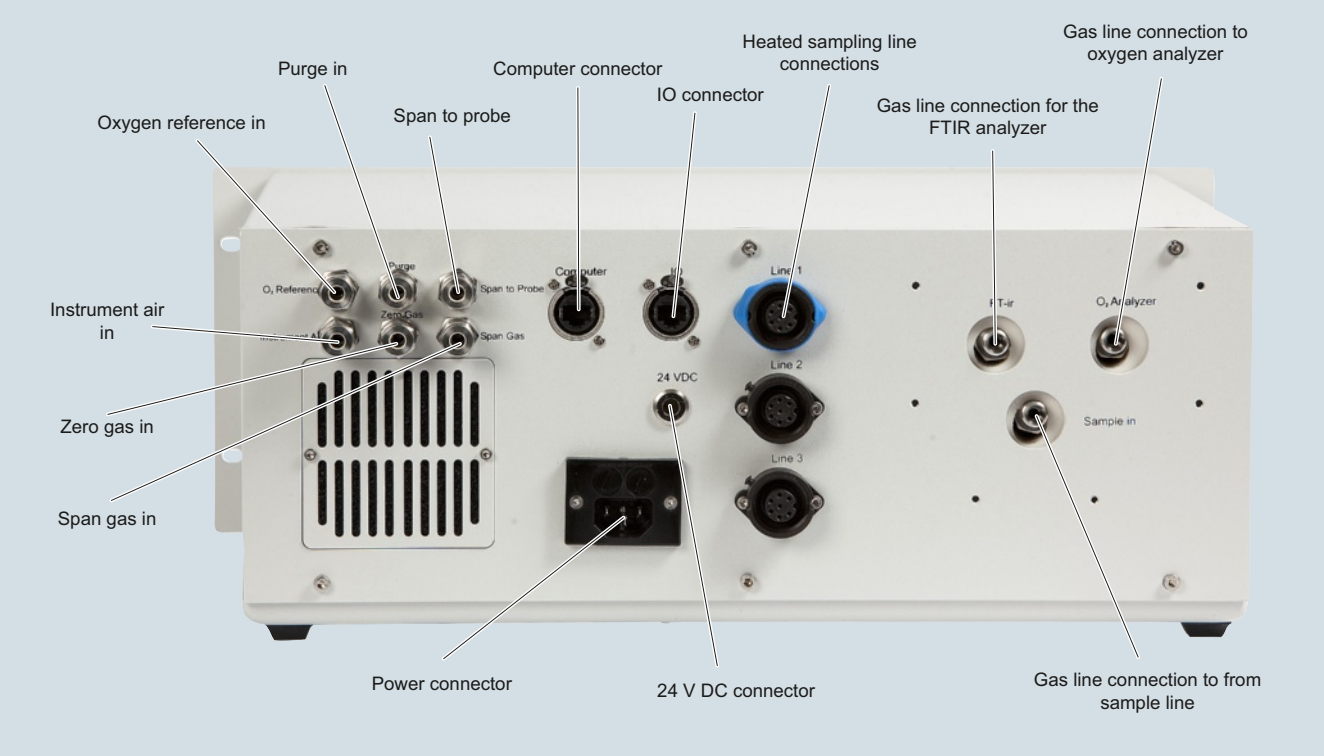

Rear with connections of the Gasmet CEMS sampling unit

Analysis cabinet

The analysis cabinet of the Gasmet CEMS contains all the essential components in the form of 19'' rack units, including cabling and tubing:

- The Gasmet CEMS sampling unit
- The Gasmet CEMS FTIR spectrometry module with gas cuvette
- An industrial PC, including TFT display and keyboard, for controlling the analysis systems and for processing data
- An optional oxygen analyzer
- An additional, optional FIDAMAT 6 analyzer

The external dimensions of the analysis cabinet with socket, including the air-conditioning unit mounted on the rear door, are: 2 100 x 600 x (800 + 250) mm (H x W x D).

Hose and cable inlets are possible from the top, below, left and right.

At the installation location, sufficient space must be provided to the front, the right and the rear of the analysis cabinet to allow opening of the front and rear doors, and facilitate access to the rear door. The air-conditioning unit mounted on the rear also requires sufficient space for air circulation.

To be able to pull out the 19'' rack units to the front on the telescopic extensions, the electrical cables and sample gas lines in the cabinet must be sufficiently long and flexible. The same applies to the lines to the CEMS analysis cabinet if it has to be moved on optional rollers for service and maintenance purposes, for example.

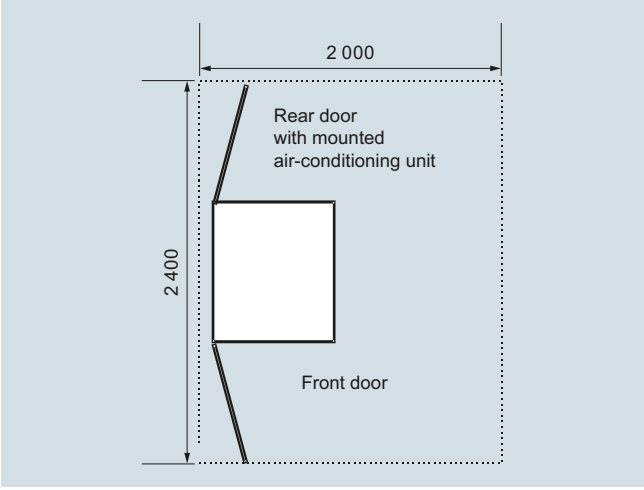

Minimum space requirements for a Gasmet CEMS for facilitating installation and maintenance work

© Siemens AG 2014

Gasmet CEMS

External panels and doors

The side panels and the rear door of the Gasmet CEMS analysis cabinet are designed in steel plate, and the front door in glass.

Base

The analysis cabinet of the Gasmet CEMS is offered optionally on a plinth or four rollers (two with immobilizing brakes).

Air-conditioning unit

To prevent overheating of the electronic components inside the cabinet, the analysis cabinet is supplied as standard with an air-conditioning unit. The air-conditioning unit is attached to the rear door and has a cooling capacity of 1 100 W.

Condensation removal

The Gasmet CEMS analysis system is offered as standard with a plastic tube for removal and disposal of condensation by the customer.

Power supply

The system can be designed either for three phases 115 V AC at 60 Hz, 32 A or 400 V AC, or three phases 230 V AC at 50 Hz, 16 A.

Three phases, neutral and ground must always be provided by the customer.

Analog signal processing

The analog signals are connected as single wires on isolating terminals as standard.

Analyzers

The analysis cabinet is prepared for accommodating one to three analyzers with hot sample feed. As well as the standard Gasmet CEMS FTIR spectrometry unit, the system can also be supplemented with a ZrO_2 oxygen analyzer, as well as a FIDAMAT 6. Different measured components and measuring ranges are available for selection. Other combinations of measured components and measuring ranges are available on request, but you must check that the desired certificates and approvals are available. The analyzers, measured components and measuring ranges used are described briefly below.

GASMET FTIR spectrometer

For measuring 16 infrared active components as standard. A calibrated measuring range is stored as standard per gas component. Further calibrated measuring ranges per gas component are available upon request for an additional charge.

4

Component		Smallest measuring range	Typical measuring range	Maximum measuring range	Unit
Water	H_2O	0 ... 25	0 ... 25	0 ... 40	Vol.%
Carbon dioxide	CO_2	0 ... 10	0 ... 20	0 ... 30	Vol.%
Carbon monoxide	CO	0 ... 70	0 ... 500	0 ... 10 000	ppm
Nitrous oxide	N_2O	0 ... 50	0 ... 100	0 ... 500	ppm
Nitrogen monoxide	NO	0 ... 100*	0 ... 200	0 ... 2 000	ppm
Nitrogen dioxide	NO_2	0 ... 100	0 ... 200	0 ... 500	ppm
Sulfur dioxide	SO_2	0 ... 30*	0 ... 100	0 ... 2 000	ppm
Ammonia	NH_3	0 ... 20*	0 ... 50	0 ... 500	ppm
Hydrogen chloride	HCl	0 ... 10*	0 ... 50	0 ... 500	ppm
Hydrogen fluoride	HF	0 ... 17*	0 ... 50	0 ... 100	ppm
Methane	CH_4	0 ... 50	0 ... 100	0 ... 1 000	ppm
Ethane	C_2H_6	**		0 ... 100	ppm
Ethylene (ethene)	C_2H_4	**		0 ... 100	ppm
n-propane	C_3H_8	**		0 ... 100	ppm
n-hexane	C_6H_{14}	**		0 ... 100	ppm
Formaldehyde	HCOH	**		0 ... 50	ppm
Total carbon (via FTIR measurement)	C_{total}, or THC, TOC	0 ... 15	0 ... 40	0 ... 40	mgC/m^3
Nitrogen oxide (via FTIR measurement)	NO_x	Calculated from N_2O, NO and NO_2			

* Smallest measuring range only possible at maximum 30 vol.% water concentration

** Dependent on the application

Standard components and measuring ranges Gasmet CEMS

© Siemens AG 2014

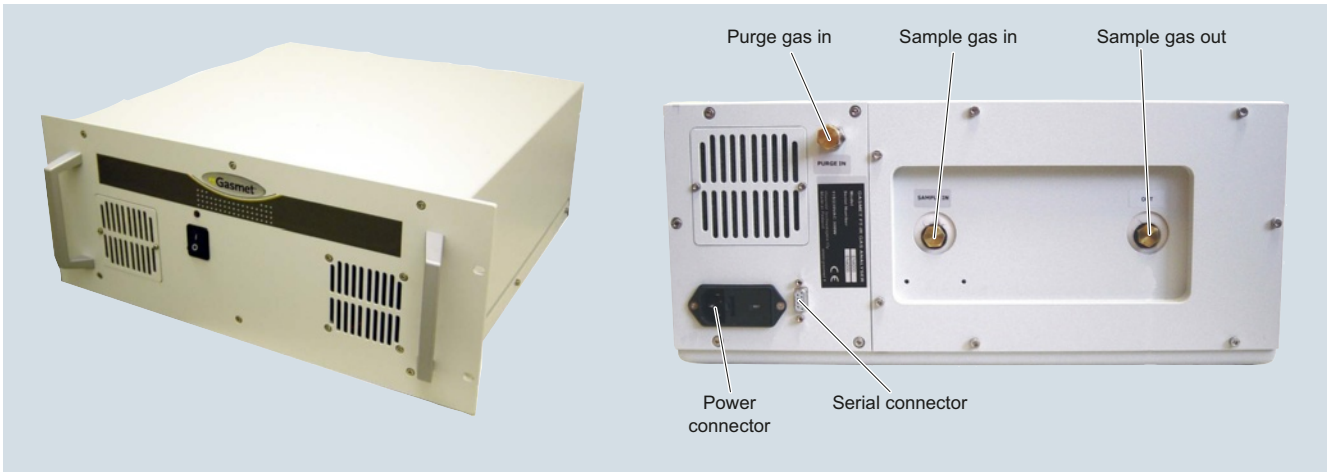

Gasmet CEMS FTIR rack unit, front and rear

ZrO_2 oxygen analyzer

Component		Typical measuring range	Unit
Oxygen	O_2	0 … 25	Vol.%

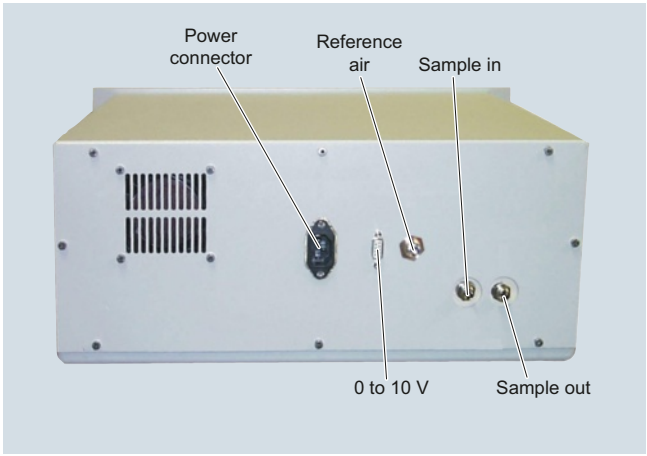

Electrical and gas connections of the ZrO_2 analyzer

FIDAMAT 6

The FIDAMAT 6 is used for FID-based measurement of the total carbon content (C_{total}, THC, TOC value).

Component		Typical measuring range	Unit
Total carbon	C_{total}, or THC, TOC	0 ... 40	mgC/m^3

You can find details of the optional FIDAMAT 6 analyzer in the "Continuous gas analyzers, extractive" chapter of this catalog.

© Siemens AG 2014

Gasmet CEMS

Component		Performance-tested measuring ranges*)	Additional performance-tested measuring ranges*)		Units
			Range 1*)	Range 2*)	
Water	H_2O	0 ... 30	0 ... 40		Vol%
Carbon dioxide	CO_2	0 ... 25			Vol%
Carbon monoxide	CO	0 ... 75	0 ... 300	0 ... 1500	mg/m^3
Nitrous oxide	N_2O	0 ... 100	0 ... 500		mg/m^3
Nitrogen monoxide	NO	0 ... 200	0 ... 600	0 ... 2000	mg/m^3
Nitrogen dioxide	NO_2	0 ... 200	0 ... 500		mg/m^3
Sulfur dioxide	SO_2	0 ... 75	0 ... 300	0 ... 1500	mg/m^3
Ammonia	NH_3	0 ... 15	0 ... 50		mg/m^3
Hydrogen chloride	HCl	0 ... 15	0 ... 90		mg/m^3
Oxygen	O_2 1)	0 ... 25			Vol%
Total carbon	THC, TOC 2)	0 ... 15			mgC/m^3
Hydrogen fluoride	HF 3)	0 ... 3	0 ... 10		mg/m^3

* A calibrated measuring range is stored in the software of a Gasmet CEMS per measured component as standard. Additional suitability-tested measuring range available, either alternatively or for an additional charge.

1) Using an optionally available, performance-tested ZrO_2 oxygen analyzer

2) Using an optionally available, performance-tested FID analyzer

3) For performance-tested applications, the following must be checked for each case:

a) Only HF has to be measured in harmony with European Directive 2000/76/EU and 2001/80/EU.
=> QAL1 Certificate available

b) HF must be measured with only one FTIR spectrometer unit simultaneously with one or more other performance-tested IR-sensitive gas components.
=> No QAL1 certificate formally available for HF, but FTIR unit can be configured on request in such a way that the extended measuring uncertainties as required by European Directive 2000/76/EU and 2001/80/EU are observed with regard to HF measurement. A manufacturer declaration in this regard and calculation of the extended measuring uncertainties can be offered on request.
=> Possibly lower-cost solution compared to the use of 2 FTIR spectrometer units (see c)), if accepted by authority/test institute.

c) HF and one or more of the other above-listed IR-sensitive gas components are measured with two FTIR spectrometer units.
=> QAL1 certificate available

Performance-tested measuring ranges of the Gasmet CEMS analysis system

Other combinations of measured components and measuring ranges are available on request, as well as other sample gas components. In this case, you must check that the desired certificates and approvals are available.

Control and analysis unit

An industrial PC with Windows operating system and RAID hard drives is used in the Gasmet CEMS analysis system for controlling the sampling unit and the analyzers, as well as for data analysis and forwarding of the analysis data to the process control system. The GASMET Calcmet software is used as the control and analysis software.

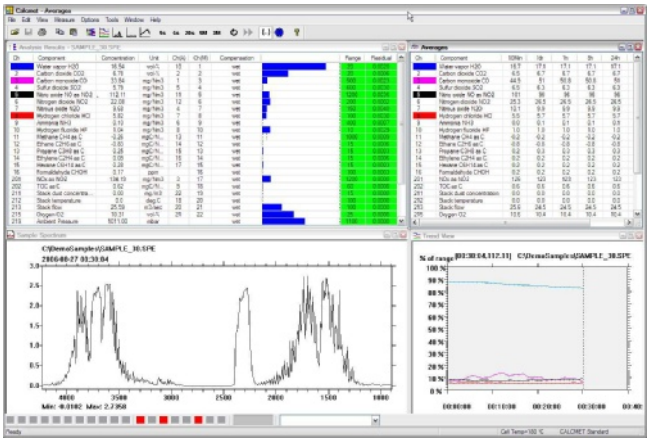

Operator interface of the Calcmet software of the Gasmet CEMS analysis system

The standard configuration enables control and monitoring of the analyzers via the serial interface, watchdog support, as well as remote monitoring and maintenance options for the service and maintenance personnel.

Siemens provides automation and drive products with industrial security functions that support the secure operation of plants or machines. They are an important component in a holistic industrial security concept. With this in mind, our products undergo continuous development. We therefore recommend that you keep yourself informed with respect to our product updates. Please find further information and newsletters on this subject at: http://support.automation.siemens.com

© Siemens AG 2014

To ensure the secure operation of a plant or machine it is also necessary to take suitable preventive action (e.g. cell protection concept) and to integrate the automation and drive components into a state-of-the-art holistic industrial security concept for the entire plant or machine. Any third-party products that may be in use must also be taken into account. Please find further information at: http://www.siemens.com/industrialsecurity

Zero gas and calibration gas supply

The Gasmet CEMS analysis system is equipped as standard with two solenoid valves for the automatic infeed of zero gas and calibration gas.

Either nitrogen (quality: at least 5.0) or purified instrument air is used as the zero gas for the FTIR analyzer, which must be fed in at a pressure of 2 000 hPa.

The span gas must contain one or more of the gas components to monitored, depending on requirements and/or official regulations. The span gas must also be fed in at a pressure of approx. 2 000 hPa.

Instrument air supply

The FTIR interferometer of the Gasmet CEMS is purged continuously with instrument air at an even flow rate of approx. 0.5 l/min.

All internal gas routes of the Gasmet CEMS upstream of the FTIR spectrometer must be kept free of all contamination using clean purge gas before switching on the analyzer with sample gas infeed, or in good time before switching off temperature stabilization of the sample gas lines and the analyzer. This prevents condensation of sample gas components, airborne pollutants, and atmospheric humidity, and/or the accumulation of particles inside the FTIR spectrometer. This prevents irreversible damage to the internal gas cuvette.

Either nitrogen (quality: at least 5.0) or completely oil-free and particle-free instrument air is used as the purge gas.

To enable a "safety purge" of the internal gas routes in particular, the instrument air must always be available at a pressure of approx. 6 bar.

Options/expansions (on request)

- Second/further calibrated measuring range(s) per sample gas component
- Expansion set with solenoid valves for automatic span gas infeed of up to four further span gases
- Instrument air/combustion air processing
- Calibration unit for the recommended annual test with wet gases to adjust the H_2O, NH_3, HCl and HF calibration (can be made available on loan within the scope of a service contract)

Function

Sample gas (max. 600 °C) is continuously taken via a heated sample gas probe, and transported via a heated sample line to the sample pump of the heated sampling unit in the air-conditioned analysis cabinet. Heating to 180 °C prevents condensation in the analysis system. From the sampling unit, the sample gas flows via further heated sample gas lines continuously through the gas cuvette of the actual FTIR analyzer, as well as, through the gas cuvette of the optional ZrO_2 oxygen analyzer.

In the FTIR analyzer, spectra of the gas mix in the infrared spectrum range are recorded at intervals of a few seconds. The generated interferograms are added together and converted to infrared spectra using mathematical Fourier transform routines. The result is the absorption spectrum of the sample gas, averaged over 60 seconds. The concentrations of the individual components are calculated using multivariate-multicomponent analysis.

A connected industrial PC, equipped with the special Calcmet software, handles control of the measurements, analysis of the measured spectra, control of other programmable sequences, and output of the analog and status signals.

FTIR spectroscopy is outstandingly suitable for multicomponent analysis of numerous gas components. However, the oxygen concentration important for emission measurements, and the concentrations of other non-infrared-active gases such as inert gases or hydrogen, cannot be determined in this way.

For measuring O_2, the system can be optionally equipped with a ZrO_2 oxygen analyzer that can be integrated into the Gasmet CEMS as a further 19" rack unit, and controlled using the Calcmet software.

The FTIR method offers the possibility of calculating a "total organic carbon value" from the individual concentrations of several hydrocarbons stored in the Gasmet CEMS standard calibration library. If direct total organic carbon measurement using the FID method is required, a further free 19'' slot of the Gasmet CEMS can be optionally equipped with a FIDAMAT 6.

The cabinet of the Gasmet CEMS analysis system is equipped as standard with an air-conditioning unit mounted on the rear. Power supply versions are available for 115 V AC or 400 V AC.

© Siemens AG 2014

Gasmet CEMS

Gas flow charts and electrical connections

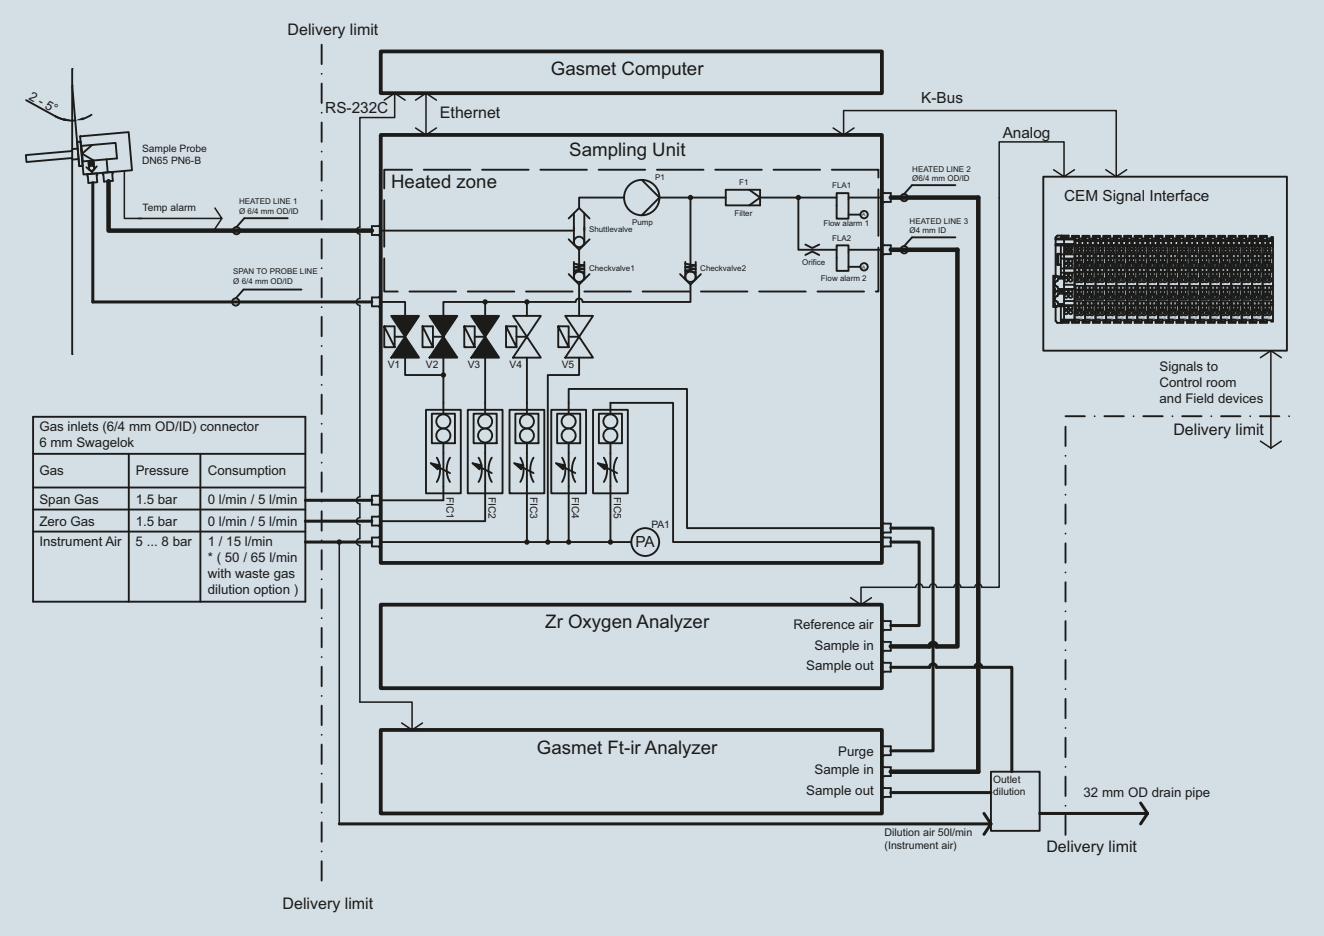

Gasmet CEMS: Gas flow chart including options

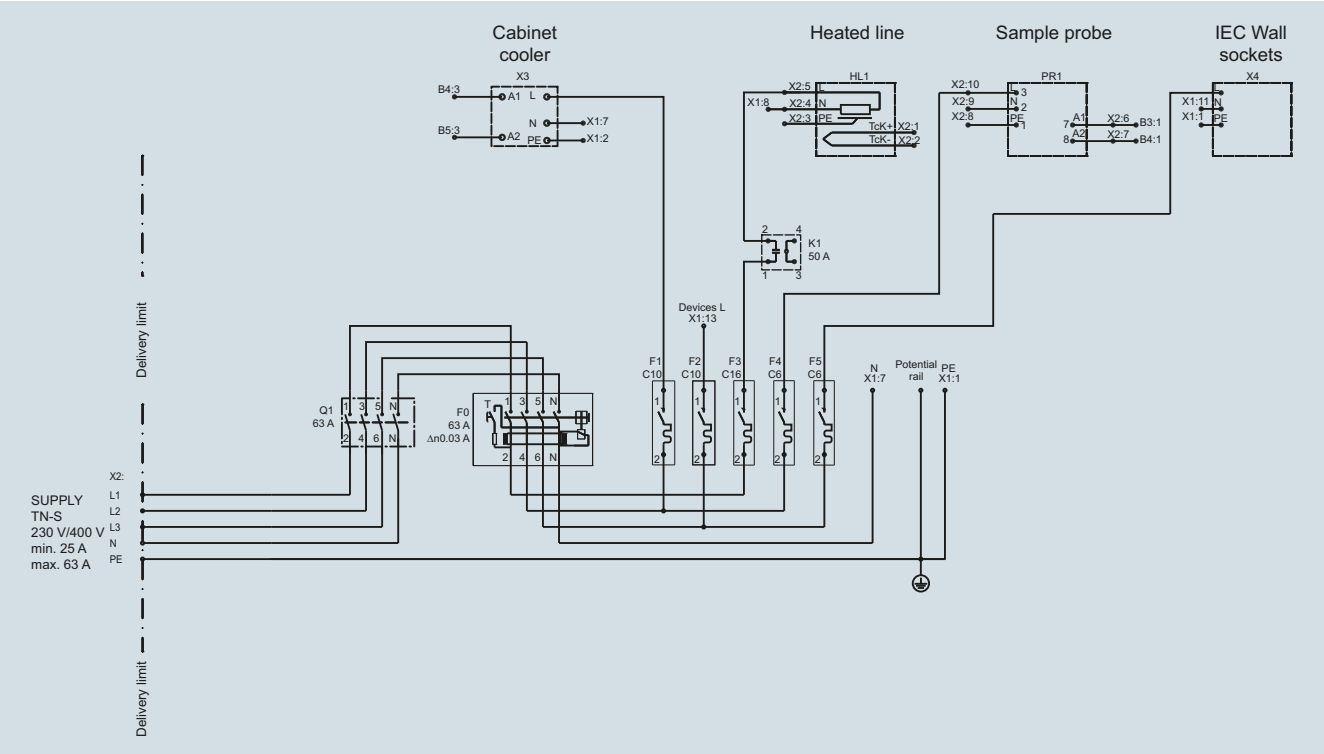

Gasmet CEMS: Electrical connections, including options

© Siemens AG 2014

Technical specifications

General data

Measuring principle	• Fourier transform infrared (FTIR) spectroscopy • for oxygen: ZrO_2 measuring cell (optional) • for total carbon (C_{total}, THC, TOC) - FTIR, not performance-tested (standard) - FID analyzer, also performance-tested in accordance with EN 14181 if required (option)
Performance capability	Simultaneous analysis of up to 50 gas components Standard: 16 components
T90 time	< 180 s, with 20 m sample gas line
Climatic conditions	
• Ambient temperature during operation	0 ... 40 °C, non-condensing
• Ambient conditions during storage and transportation	-20 ... 60 °C, 0 ... 95% relative humidity, no condensation!
• Site	Indoors, dust-free, clean ambient air, no external vibrations
Ex zone	Non-Ex area (IEC General Purpose)
System design	
• Type	Cabinet configuration
• Cabinet degree of protection	IP54
Electrical connections	
• Supply voltage (alternative 1)	3 phases 115 V AC (-15%, +10%)/ 60 Hz, 32 A + neutral + ground (TN-S)
• Supply voltage (alternative 2)	400 V AC (-15 %, +10%) /50 Hz, 3 phases 230 V AC (-15%, +10%)/ 50 Hz, 16 A + neutral + ground (TN-S)
• Power consumption	Gasmet CEMS with 20 m heated sample gas line: approx. 7.5 kW
Dimensions (with plinth)	2100 x 600 x (800 + 250) mm (H x W x D)
Weight	Gasmet CEMS with FTIR and O_2 analyzers: Approx. 320 kg *)

Electrical inputs/outputs

Analog inputs/outputs	
• Analog outputs	16 channels, 4 … 20 mA, isolated, freely programmable
• Analog inputs	8 channels, 4 … 20 mA, isolated, freely programmable
Digital inputs/outputs	
• Digital outputs	16 channels, 24 V DC, freely programmable
	System alarm, maintenance requirement, maintenance, measured value overshoot, valid measured value
• Digital inputs	16 channels, floating contacts
	Temperature alarm sampling probe, temperature alarm analysis cabinet, alarm air-conditioning unit on the analysis cabinet, alarm zero gas pressure, alarm O2 analyzer, activated scan gas infeed via sampling probe, activated system standby
Optional expansions	Up to 255 terminal strips
Interfaces (optional)	RS 232, RS 422/485, Modbus, PROFIBUS

Sampling unit

Temperature controller for heated sample gas lines	0 … 180 °C
Type of temperature sensor in sample gas lines	K type (Ni-Cr-Ni element)
Gas inlet conditions	
• Max. sample gas pressure at inlet to sample preparation system	1 500 hPa
• Sample gas temperature at inlet to sample preparation system	180 … 200 °C, non-condensing
• Dust content at inlet to sample preparation system	Dust-free
• Instrument air	Oil-free and dust-free instrument air, dew point < -40 °C
• Flow rates	• Sample gas: 2 ... 5 l/min • Zero gas: Approx. 0.5 l/min • Span gas: Approx. 0.5 l/min • Reference air for optional O_2 measurement: Approx. 0.7 l/min • Instrument air to rinse the FTIR spectrometer: - Normal mode: Approx. 0.5 l/min - Safety purging: Approx. 4 l/min • Reference air for optional O_2 measurement: Approx. 0.7 l/min
• Gas inlets	Sample gas (heated to 180 °C), span gas, zero gas, instrument air
• Gas outlets	FTIR analyzer (heated), O_2 analyzer (heated), span gas for sample probe, interferometer purging, reference air for O_2 analyzer
• Gas connections	Swagelok 6 mm, for sample gas lines with 4/6 mm internal/external diameters of the Teflon core. The external diameter of the sample gas line including preassembly on the side of the connection to the sampling unit must be no more than 43 mm.
Sample gas pump	
• Material	Stainless steel 316
• Diaphragm	PTFE
• Maximum flow rate	4 l/min
• Heated filter	For particles > 2 µm
Valves	
• Solenoid valves	Sample gas / backflushing, span gas via sample outlet, span gas via sample probe, zero gas, instrument air (safety circuit)
• Shut-off valves	Sample gas/backflushing, gas infeed for maintenance purposes

FTIR spectrometer unit

Measuring principle	Fourier transform infrared (FTIR) spectroscopy
Spectral resolution	Standard: 8 cm^{-1}
Scan rate	10 scans/s
Detector	Peltier cooled MCT
Infrared light source	SiC, 1 550 K
Beam splitter and window material	ZnSe
Spectral range	4 200 … 900 cm^{-1} (2.4 … 11 µm)
FTIR gas cuvette	Multiple path gas cell with fixed optical path length: 5.0 m
• Material	Standard: 100% rhodium-coated aluminum
• Mirror	Gold coating
• Cuvette volume	0.4 liters
• Seals	Standard: Viton O rings, others: On request
Window material	BaF_2
Interferometer purging	• Oil-free and particle-free instrument air, dew point < -40 °C, 0.5 l/min • Nitrogen (at least 5.0)

© Siemens AG 2014

Gasmet CEMS

Measuring performance	
• Zero point checking:	Recommendation: Automatic "zero point calibration" with nitrogen every 24 hours (Quality of the nitrogen: 5.0 or higher)
• Zero point drift:	< 2% of the measuring range of the "zero point calibration"
• Linearity error	< 2% of the measuring range
• Temperature impact	< 2% of the measuring range per 10 K temperature change
• Pressure influence	1 % of the measured value at 1% sample gas pressure change. Ambient pressure fluctuations are measured and compensated for
Oxygen analyzer (optional)	
Measuring principle	ZrO_2 measuring cell
Detection limit	< 1 ppm O_2
Reference gas	• Oil-free and particle-free instrument air, dew point < -40 °C • Span gas
Sensor material	Stainless steel 316 (1.4571)
Gas flow	Minimum 0.1 l/min
Measuring ranges	Min. 0 … 2 vol.% O_2 Type 0 … 25 vol.% O_2
Accuracy	± 0.2% of the measuring range
FIDAMAT 6 (optional)	See "Continuous gas analysis, extractive"
Measuring principle	FID analyzer

*) The system is supplied partially disassembled in several packages: Analyzer rack units, sampling unit, industrial PC, air conditioning unit and preconfigured analysis cabinet.

© Siemens AG 2014

Selection and ordering data

	Article No.
Gasmet CEMS FTIR analysis system for continuous emissions monitoring ↗ Incl. GASMET FTIR analyzer, Gasmet CEMS sampling unit, industrial PC, TFT screen, keyboard Standard analog and digital inputs/outputs ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	**7MB1956 - ■ ■ ■ ■ ■ - ■ ■ ■ ■**
Cabinet configuration	
Cabinet configuration 1 with plinth, 2 100 x 600 x (800 + 250) mm (H x W x D), air-conditioning unit on rear	**0**
Cabinet configuration 1 on rollers, 2 100 x 600 x (800 + 250) mm (H x W x D), air-conditioning unit on rear	**1**
Sample gas probe	
Without sample gas probe	**A**
Heated sample gas line	
Without heated sample gas line	**A**
FTIR measurement	
Standard CEMS FTIR unit 1	**0**
Oxygen measurement	
No O_2 measurement	**0**
Prepared for accommodating a suitable ZrO_2 O_2 analyzer (19" rack unit)	**1**
Including ZrO_2 analyzer	**2**
Total carbon measurement	
FTIR-based total carbon measurement (not performance-tested)	**1**
Prepared for accommodating an additional total carbon (FID) analyzer (19" rack unit)	**2**
Software version	
Calcmet software version 12.x	**A**
Fieldbus version	
Modbus via RS 232	**A**
Power supply	
400 V AC/50 Hz, on customer side: 3 phases (230 V/16 A), neutral, ground	**0**
115 V AC/60 Hz, on customer side: 3 phases (115 V/32 A), neutral, ground	**1**

Additional versions	Order Code
Please add "-Z" to Article No. and specify Order code.	
Calibration certificate (certificate of the gas cylinder with which the calibration has been made)	**A01**

Accessories	Article No.
Portable GASMET calibration gas generator for H_2O and liquid calibrations; including heated probe line as well as 5 ml and 1 ml injectors	**KHZ-GM-CAL-301**
Rollers for housing cabinet, supplied separately	**KHZ-GM-CAB-OPT-120**

Recommended spare parts schedule

Description	Annually	Every 2 years	Every 3 years	Item no.
Filter set for housing fan (10 units)	X			**KHZ-GM-COW-FIL-003**
O-ring filter element	X			**KHZ-GM-SAM-FIL-004**
Heated filter element 0.1 µm, stainless steel	X			**KHZ-GM-SAM-FIL-009**
Set of diaphragms for sample gas pump	X			**KHZ-GM-SAM-FLOW-100**
IR light source unit		X		**KHZ-GM-OPE-IRS-620**
Laser unit			X	**KHZ-GM-OPE-LAS-630**
Temperature fuse 229 °C, with crimp connections			X	**KHZ-GM-SMP-HEAT-002**
Set of Viton gaskets (standard) for gas cuvette	X			**KHZ-GM-SMP-GASK-738**

© Siemens AG 2014

Dimensional drawings

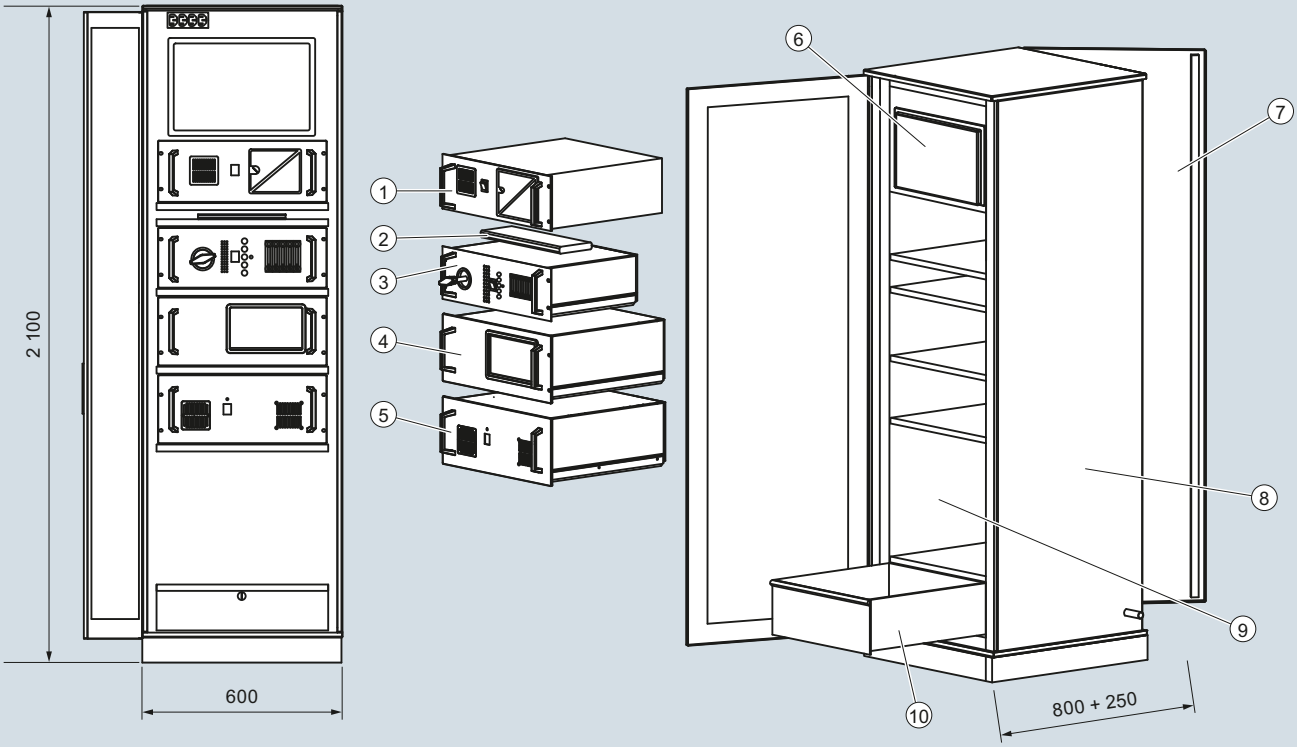

1 Industrial PC
2 Keyboard and touchpad
3 Gasmet sampling preparation unit
4 ZrO_2 oxygen analyzer (optional)
5 Gasmet FTIR analyzer
6 TFT display
7 Rear door with mounted air-conditioning unit
8 Cabinet IP54
9 Space for optional FID analyzer
10 Drawer for accessories

Design of the Gasmet CEMS analysis system

© Siemens AG 2014

More information

Preventive maintenance

The table below offers a general overview of the recommended tasks for preventive maintenance for a Gasmet CEMS analysis system. The actual requirements depend heavily on the individual conditions of the application and installation. The tasks that can be carried out by the operating personnel are described in detail in the documentation supplied with each system. For more comprehensive work, special training courses or service contracts are offered.

Maintenance interval	Task(s)	To be carried out by
Daily	Zero gas infeed	Automated
1 week	Visual inspection of the system and the included analyzers	Operating personnel
1 week	Visual inspection of the sampling unit	Operating personnel
Approx. 30 days	Zero gas and span gas infeed	Automated
2 to 6 months	Inspection and replacement of the filters of the sample probe and the sampling unit	Specially trained operating personnel (included in the annual service with the service contract)
Approx. 3 months	Inspection of the oxygen calibration of the ZrO_2 oxygen analyzer	Automated (included in the annual service with the service contract)
Approx. 12 months	Inspection of the gas cell of the FTIR analyzer	Trained service engineer (included in the annual service with the service contract)
Approx. 12 months	If required: Replacement of the diaphragm of the sample pump	Trained service engineer
Approx. 12 months	Infeed of wet span gases (for NH_3, HCl, HF measurement), adjustment of the "water calibration"	Specially trained service engineer (included in the annual service with the service contract, including provision of the calibration unit required for this purpose)
18 to 60 months	If required: Replacement of optoelectronic components (e.g. laser and infrared light source) of the FTIR analyzer	Trained service engineer

Suggestion for preventive maintenance of a Gasmet CEMS analysis system

Automated maintenance

Zero gas infeed

The Gasmet CEMS carries out automatic "zero gas calibration" daily at definable times. With the help of controllable solenoid valves, the FTIR gas cuvette is flushed for several minutes with "zero gas", usually nitrogen, instead of sample gas.

Zero gas and span gas infeed

An infeed of span gas using dry span gases is recommended at regular intervals, such as every 30 days, before infeed of the zero gas. Span gas infeed can also be automated via controllable solenoid valves.

Annual inspection of wet span gases

Recording of a new water spectrum using the FTIR unit of the Gasmet CEMS analysis system is recommended once a year.

Wet span gases for adjusting the system should also be supplied once a year for the gas components ammonia, hydrogen chloride and hydrogen fluoride.

These tasks must be carried out by a specially trained service engineer, e.g. within the scope of a service contract.

Span gases and nitrogen are required for these inspections as well as a special calibration unit. That accessory can be be provided on loan within the scope of a service contract.

The Gasmet CEMS calibration unit for water

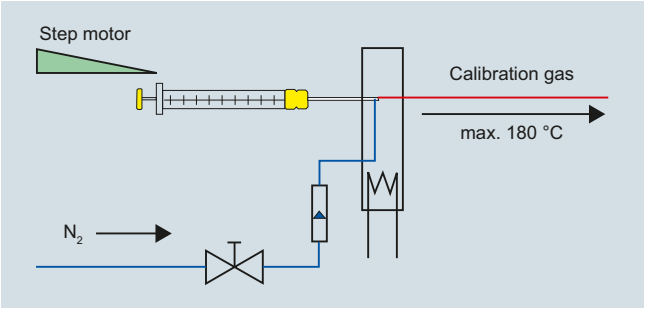

Functional principle of the Gasmet CEMS calibration unit for water

© Siemens AG 2014

HM-1400 TRX Total mercury analyzer system

Overview

The HM-1400 TRX is a total mercury monitor for fully automatic and continuous measurement of emissions of mercury in flue gas ducts.

Benefits

- Extractive measuring procedure
- Low maintenance dry reactor
- High operational reliability
- Easy maintenance, easy replacement of components
- Low cross sensitivities
- Easy to read LC display

Application

The HM-1400 TRX monitors not only the performance of the mercury separators by measuring the total mercury concentration, but also reports and registers (also online) any violation of the high limits. As a result it is often possible to intervene directly in the process of the plant to be monitored and thus ensure reliable compliance with the specified limit values.

Areas of application

- Waste incineration plants (municipal waste, industrial waste, hospital waste)
- Sewage sludge and hazardous waste incineration
- Steel plants with scrap metal preparation
- Contaminated soil burning plants (thermal cleanup of soil)
- Crematoriums
- Mercury mines and refineries
- Fluorescent light bulb recycling

Approvals

- Suitability-tested by the TÜV North, test report 109 GMT007/ 8000632287 dated 30 June 2011
- Certified according to DIN EN 15267-3
- Itemized in the list of suitable measuring devices for continuous emission measuring
- MCERTS

Design

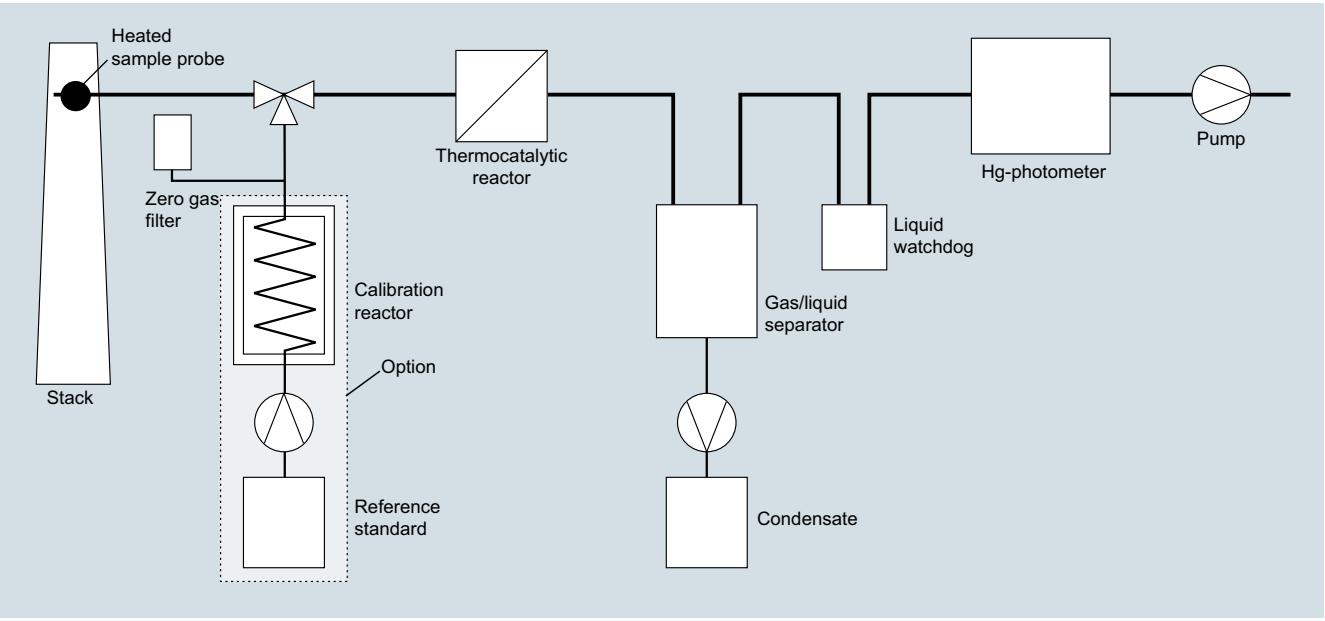

System components HM-1400 TRX

Sampling system

The sampling system consists of a sampling probe and a sampling line. Both components are heated to 180 °C. With flue gas temperatures < 200 °C, the sampling tube must also be in heated tube design to prevent faulty measurements (lower findings for the mercury concentration measurement due to the absorption properties of $HgCl_2$).

Gas patch switchover

The sample gas is extracted condensate-free from the exhaust stack with approx. 100 Nl/h and fed via a three-way ball valve to the thermocatalytic reactor. The path switchover is also heated and is operated as component of the measuring device by means of the device control. You can select between sample gas connection, reference connection or zero gas connection.

© Siemens AG 2014

Thermocatalytic reactor

The total mercury analysis measures not only the elementary metallic mercury that is stored freely in the sample gas or deposited in the materials, but also measures the chemically bonded mercury that is found in the flue gas. The ionic mercury must also be converted into elementary, atomic mercury so that the detector can acquire and evaluate the total mercury. The thermocatalytic reactor carries out this function at a pre-set operating temperature.

Gas drying

Before the mercury content is determined, the now created sample gas containing Hg^0 is dried while flowing through a Peltier cooler. At the same time the system pressure and the measured gas temperature are continuously recorded.

Prefilter

Before the prepared and dried sample gas flows through the photometer, it passes through an additional filter with hygroscopic effect to eliminate even lower residual humidity components. This is important first for recording the gas volume flow in dry form and, second, pollution and deposits are avoided in the photometer and the maintenance-free service life increased.

2-beam UV photometer

The sample gas enters the measuring cuvette and is then routed over a selective filter in which the mercury is absorbed. The sample gas thus freed from the mercury then flows through the reference cuvette. The advantage of this cuvette switching is that the entire gas matrix flows through both the measuring cuvette and the reference cuvette and most of the mercury is selectively filtered out before it reaches the reference cuvette. This principle of differential measurement means that the measurement is less sensitive to spectrometric interference components than the single-beam photometer that has only one cuvette. With the cuvette switching of the two-beam device this cross sensitivity for SO_2, for example, only becomes effective after 1000 mg/m³. The measured signal from the photometer is taken over by the internal PLC.

Gas volume flow generation

When the sample gas volume flow leaves the 2-beam UV photometer, it passes through the vacuum pump which generates the gas flow. The volume flow of approx. 100 Nl/h is set manually with the fine regulating valve. The system pressure and sample gas temperature parameters are measured after the gas drying at the photometer, where the mercury is also measured, and are used ultimately to convert the gas volume flow to standard conditions. The mercury concentration as result of a measurement is output as 4 to 20 mA current signal to match the set measuring range of 0 to X µg/Nm³ (dry).

Optional:

- Larger measuring range with dilution device
- Side-mounted cooling device
- Integrated system to generate reference gas
- Heated sample pipe 0.6 m, 1.0 m, 1.5 m

Function

In the HM 1400 TRX total mercury analyzer the sample gas is converted into mercury vapor by a combination of thermal and chemical treatment. It is then continuously measured in a photometer. The sample gas flow is measured after a sample game cooler at 2 °C. The concentration is calculated and displayed as "dry flue gas".

Technical specifications

Measured variable	Total mercury
Measuring ranges	0 ... 45, 0 ... 75 to 0 ... 500 µg/Nm³
Measuring principle	UV absorption
Sample gas temperature	0 ... 250 °C
Sample gas pressure	-50 ... +50 hPa
Duct diameter	> 0.5 m
Ambient temperature	5 °C ... 40 °C
Degree of protection	IP40 (IP54)
Measured value outputs	2 x 0/4 ... 20 mA, 500 Ω
Relative expanded uncertainty	5.5% CR
Digital outputs	4 relay outputs, permissible load 250 V, 100 VA
Digital inputs	1 isolated input
Detection limit	< 0.1 µg/Nm³
Reference point drift	< 2% ZRE
Zero point drift	< 0.5% ZRE automatic zero offset
Supply voltage	230/400 V AC, 50 Hz, 3 x L, N, PE
• Measuring instrument	1200 VA
• Sampling probe	650 VA
• Sampling line	100 VA/m
• Heated sample pipe 0.6 m, 1.0 m, 1.5 m	600 VA/800 VA/1200 VA
Dimensions (H x W x D) control cabinet	1700 x 800 x 500 mm
Weight	220 kg
Purge air supply, compressed air	6 ... 8 bar (for reference gas generator only)

More information

A HM-1400 TRX total mercury analyzer consists of, for example:

- 1 sampling pipe, heated and temperature-controlled, with connecting cable
- 1 sampling probe, heated and temperature-controlled, with connecting cable
- 1 sampling line, heated and temperature-controlled
- 1 measuring device
- Operating instructions, service manual, maintenance manual

Please consult your Siemens sales partner for information on how to correctly configure and order a HM-1400 TRX total mercury analyzer for a Siemens CEMS project.

© Siemens AG 2014

D-R 220 dust and opacity measuring instrument

Overview

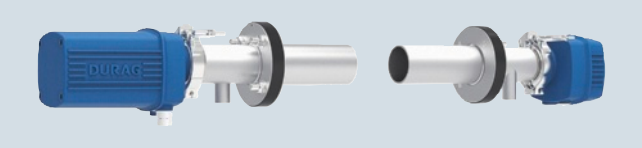

The D-R 220 is a scattered light dust and opacity measurement device for monitoring dust emissions in smaller plants and process applications.

Benefits

- In-situ measurement directly in the flue gas flow
- Digital operation with microprocessor
- Adjustable limit value
- 2 contact switch outputs
- Measuring value integral 4/15/60 seconds
- Internal event memory with real-time clock
- Modbus RTU interface
- Measurement results shown as opacity or extinction
- No weather protection covers needed

Application

The D-R 220 monitors not only the efficiency of the filter plants by registering the residual dust content, but also reports instantaneously when permissible levels of dust or flue gas emissions are exceeded. As a result it is often possible to intervene directly in the process of the plant to be monitored and thus ensure reliable compliance with the specified limit values.

Areas of application

- Compact device for smaller plants
- Heating plants, power plants
- Boiler plants in industry, barracks, hospitals, schools
- Dust extraction and filter plants
- Process monitoring

Design

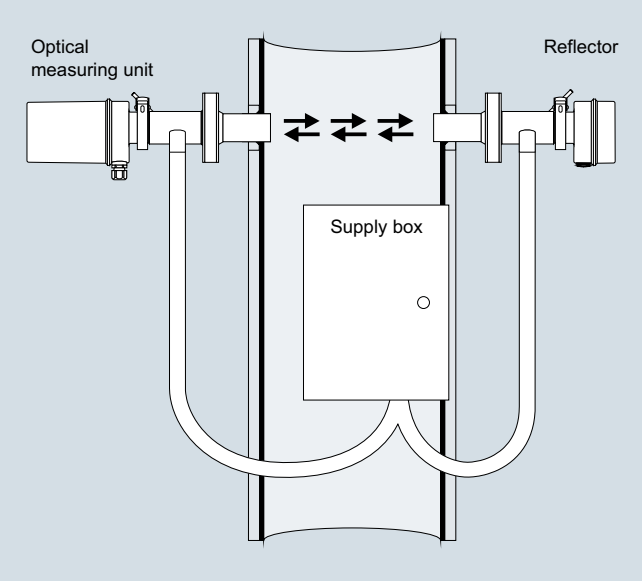

System components D-R 220

Measuring head

The transmitter and receiver optics are integrated together with the electronics in a sturdy but compact polyamide housing. The measuring head is mounted on the weld-in flange.

Reflector

The reflector is installed in a sturdy polyamide housing. The reflector is mounted on the weld-in flange directly opposite the measuring head.

Supply box with purge air unit

A hose connects the measuring head and the reflector with the supply box. The filtered air is used to keep clean the scattered light interfaces of the measuring head and the reflector. A cable connects the measuring head to the supply box.

Optional:

Quick-closing shutters

The quick-closing shutters are mounted on the measuring head and the reflector side between the weld-in flanges and the connected devices (measuring head, reflector). In the event of a fault (failure of the power supply or purge air) they automatically close the path between the exhaust gas duct and the measuring equipment.

Electronics for quick-closing shutter

A control electronics is required for each quick-closing shutter.

Universal control unit D-ISC 100

The connected equipment can be operated and configured conveniently using the D-ISC 100. The display provides an immediate overview of the current measured values and the status of the measuring instruments.

Measured-value acquisition

In the simplest case a recorder is used to record the measured values and the reference values. The measured values and status signals that are output can also be fed into systems that will process these further.

Weather protection covers

Weather protection covers are available to protect the measuring head and the reflector when the measuring system is installed outdoors.

Additional options:

- Neutral density filters for linearity check
- Sighting scope for easy alignment

Function

The device operates using the double-pass method according to the auto-collimation principle. The light beam traverses the measuring distance twice. The attenuation of the light beam by the dust content in the measuring section is measured and evaluated.

The universal control unit D-ISC 100 can be connected for the measured value display, which allows up to eight dust and flow-rate measurement instruments.

The connected equipment can be operated and configured conveniently using the D-ISC 100. The display provides an immediate overview of the current measured values and the status of the measuring instruments.

© Siemens AG 2014

Technical specifications

Measuring instrument D-R 220	
Measurements	• Opacity • Extinction
Measuring ranges	
• Opacity	0 ... 25/50/100 %
• Extinction	0 ... 0.2/0.4 ... 1.6
• Dust[1)]	• 0 ... 160 mg/m^3 • 0 ... 4000 mg/m^3
Measuring principle	Transmission
Sample gas temperature	Above dew point up to 200 °C, optional up to 500 °C
Sample gas pressure	-50 ... +10 hPa, optional higher
Duct diameter	0.4 ... 10 m
Ambient temperature	-20 ... +50 °C
Degree of protection	IP65
Measured value output	0/4 ... 20 mA, 400 Ω
Digital outputs	2 relay outputs, 30 VA, max. 48 V/0.5 A
Digital inputs	None
Accuracy	< 2% of the measuring range
Detection limit	< 2% of the measuring range
Supply voltage	24 V DC, 0.4 A from the supply unit
Dimensions (H x W x D) measuring head	160 x 150 x 314 mm
Weight	
• Measuring head	2.7 kg
• Reflector	1.6 kg
Supply box	
Purge air supply	From the supply box
Supply voltage	85 ... 264 V AC, 46 ... 63 Hz, 50 VA
Dimensions (H x W x D)	210 x 300 x 380 mm
Weight	13 kg
Degree of protection	IP65

[1)] with reference to one meter of path length after gravimetric calibration

More information

In general, a dust concentration measuring instrument D-R 220 consists of:

- 1 measuring head D-R 220 M
- 1 zero point reflector
- 1 reflector
- 2 welded tubes with adjustment flange
- 2 purge air adapters with clips
- 1 operating unit (for up to 8 sensors)
- Parameterization software with stick and USB cable
- 1 supply box (incl. purge air blower) 115/230 V, 50/60 Hz
- Operating instructions
- Weather protection covers for measuring head, reflector, blower, control unit, etc.

Please consult your Siemens sales partner for information on how to correctly configure and order a D-R 220 measuring instrument for a Siemens CEMS project.

© Siemens AG 2014

D-R 290 dust concentration measuring instrument

Overview

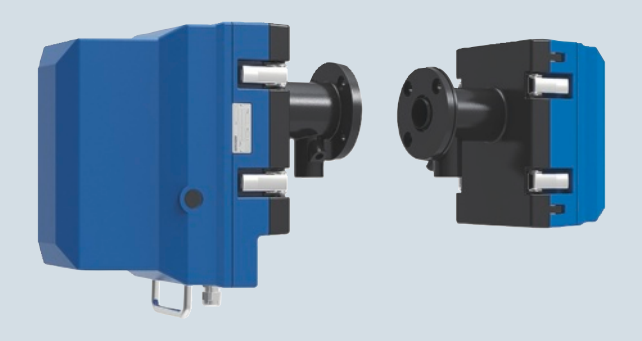

The D-R 290 is an optical opacity/dust monitor for plants with small to medium dust concentrations.

Benefits

- In-situ measuring procedure, continuous measurement
- Semiconductor source with long service life
- Super-wide band diodes (SWBD), which provides more stable measuring results in comparison to devices with conventional LEDs
- Powerful microprocessor technology
- Measured value display on LC display in opacity, extinction or in mg/m^3
- Automatic function tests with correction of measured values in relation to soiling
- Optics and electronics in a hermetically sealed unit - no smoke gas can enter device
- Easy adjustment without additional equipment
- Low-maintenance thanks to optimal purge air conduction
- Heated end plate

Application

The D-R 290 monitors not only the efficiency of the filter plants by registering the residual dust content, but also reports instantaneously when permissible levels of dust or flue gas emissions are exceeded. As a result it is often possible to intervene directly in the process of the plant to be monitored and thus ensure reliable compliance with the specified limit values.

Areas of application

- Furnace plants with semi-anthracite coal, brown coal, fuel oil and combined heating
- Converter plants, asphalt mixing plants
- Cement manufacturing plants

Approvals

- Suitability-tested by the TÜV Cologne, test report 936/801017
- Certified according to DIN EN 15267-3
- Itemized in the list of suitable measuring devices for continuous emission measuring
- MCERTS

Design

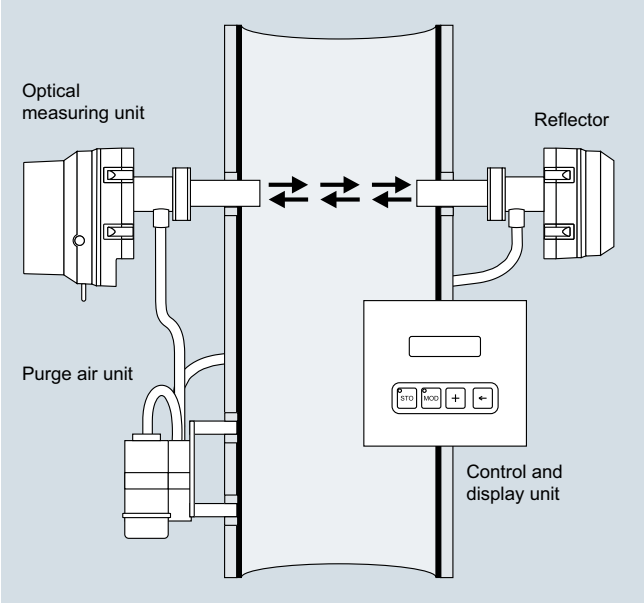

System components D-R 290

Measuring head

The transmitter and receiver optics are integrated together with the electronics in a rugged and robust aluminum housing. The measuring head is mounted on the weld-in flange.

Reflector

The reflector is installed in a rugged and robust aluminum housing. The reflector is mounted on the weld-in flange directly opposite the measuring head.

Evaluation unit

The D-R 290 measuring system is connected to and operating on the evaluation unit. The evaluation unit is connected to the measuring head by means of an approx. 2 m long cable.

Purge air unit

A hose connects the measuring head and the reflector with the purge air unit. The filtered air is used to keep clean the scattered light interfaces of the measuring head and the reflector.

Optional:

Quick-closing shutters

The quick-closing shutters are mounted on the measuring head and the reflector side between the weld-in flanges and the connected devices (measuring head, reflector). In the event of a fault (failure of the power supply or purge air) they automatically close the path between the exhaust gas duct and the measuring equipment.

Electronics for quick-closing shutter

A control electronics is required for each quick-closing shutter.

Measured-value acquisition

In the simplest case a recorder is used to record the measured values and the reference values. The measured values and status signals that are output can also be fed into an emission calculator system for further processing.

Weather protection covers

Weather protection covers are available to protect the measuring head, the reflector, the purge air unit and the terminal boxes when the measuring system is installed outdoors.

© Siemens AG 2014

Additional options:

- Bus interface, for example, Modbus or similar
- Explosion proof design for EEx p, Zone 1 or Zone 2
- With an additional display unit at the measuring location, the control and display unit can be installed at a distance of up to 1000 m away
- Temperature compensation through additional analog input
- Special model for measuring distances up to 18 m with 2 purge air units
- Filter set for sensitivity and linearity control

Function

The device operates using the double-pass method according to the auto-collimation principle. The light beam traverses the measuring distance twice. The attenuation of the light beam by the dust content in the measuring section is measured and evaluated.

Technical specifications

Measuring instrument D-R 290	
Measurements	• Opacity • Extinction
Measuring ranges	
• Opacity	0 ... 20 to 0 ... 100 %
• Extinction	0 ... 0.1 to 0 ... 1.6
• Dust[1)]	0 ... 80 mg/m^3 to 0 ... 4 000 mg/m^3
Measuring principle	Transmission
Sample gas temperature	Above dew point up to 250 °C, optional up to 1 000 °C, depending on application
Sample gas pressure	-50 ... +20 hPa, optional higher
Duct diameter	1 ... 12 m, optional up to 18 m
Ambient temperature	-20 ... 50 °C, optional higher
Degree of protection	IP65, Ex optional
Measured value outputs	2 x 0/4 ... 20 mA, 500 Ω Manual or automatic measurement range switching optional Modbus RTU, PROFIBUS DP
Digital outputs	6 programmable relay outputs, permissible load 48 V/0.5 A
Digital inputs	6 programmable isolated inputs
Accuracy	< 1 % of measuring range
Detection limit	0.75 % at extinction 0 ... 0.1
Reference point drift	< 0.4% of measuring range / month
Zero point drift	< 0.4% of measuring range / month
Auxiliary power	95 ... 264 V AC, 47 ... 63 Hz, 30 VA
Dimensions (H x W x D) measuring head	363 x 185 x 398 mm
Weight	17 kg
Purge air supply	
Purge air quantity	Approx. 80 m^3/h
Auxiliary power	115/230 V AC, 50/60 Hz, 0.37/0.43 kW
Dimensions (H x W x D)	350 x 550 x 500 mm
Weight	12 kg
Degree of protection	IP55

[1)] with reference to one meter of path length after gravimetric calibration

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-R 290 measuring instrument for a Siemens CEMS project.

© Siemens AG 2014

D-R 320 dust measuring instrument

Overview

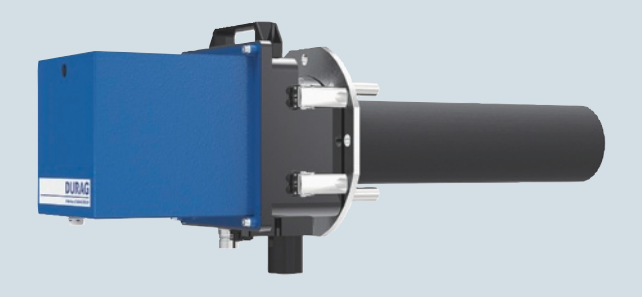

The D-R 320 is an optical dust monitor for the smallest to medium dust concentrations in dry emissions and process gas.

Benefits

- Continuous measurement of dust concentration
- Easy installation on standard flanges
- Easy setup without manual adjustment
- Automatic background light compensation, no light trap
- Convenient operation, remote access option
- Automatic control functions
- Integrated purge air regulation and purge air control
- Long maintenance intervals
- Certified to EN 15267-3
- Data transmission via Modbus, in compliance with VDI 4201-3

Application

The D-R 320 monitors not only the efficiency of the filter plants by registering the residual dust content, but also reports instantaneously when permissible levels of dust or flue gas emissions are exceeded. As a result it is often possible to intervene directly in the process of the plant to be monitored and thus ensure reliable compliance with the specified limit values.

Areas of application

Continuous emission monitoring, for example, on:

- Incineration plants in general
- Plants according to IED 2010/75/EU/17. BImschV
- Plants according to 2001/80/EG LCPD/13. BImschV/German TA-Luft
- Waste, hazardous waste and sewage sludge incineration plants
- Cement manufacturing plants
- Power plants with gas, oil, coal or co-firing
- Plants for the incineration of biomass

Monitoring of:

- Ventilation units
- Filter units

Approvals

- Suitability-tested by the TÜV Cologne, test report 936/21217455/A
- Certified according to DIN EN 15267-3

Design

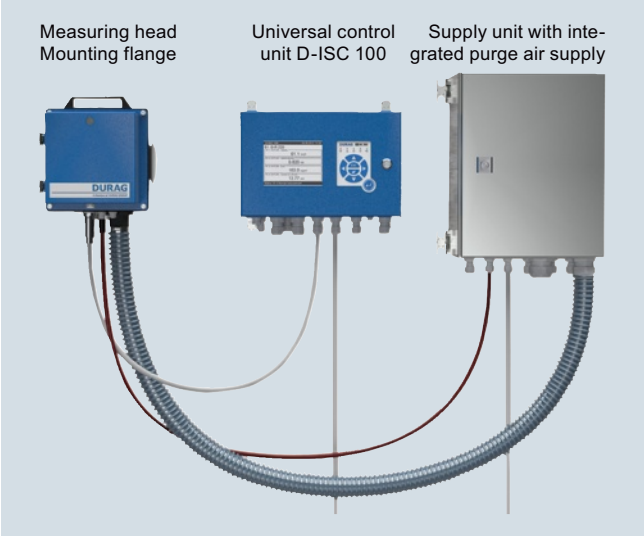

System components D-R 320

Transmitter / receiver unit D-R 320 M

The transmitter and receiver optics are integrated together with the electronics in a compact unit in a rugged housing. The transmission-reception unit consists of the measuring head, the swivel adapter, the process connection and the field facing panel. This measuring unit is installed directly above the waste gas duct, on a DIN 100 PN 6 or ANSI 4" 150 lbs flange. No adjustment is required.

Supply unit D-TB 200

The supply unit of the dust concentration measuring instrument D-R 320 is used to supply electricity and purge air and provides the connection for the transfer of the measured data. The regulated purge air is used to keep clean the optical interfaces of the transmission and reception optics of the D-R 320. The device automatically reports any failure of the purging air.

Optional:

Universal control unit D-ISC 100

The connected equipment can be operated and configured conveniently using the D-ISC 100. The display provides an immediate overview of the current measured values and the status of the measuring instruments.

Measured-value acquisition

In the simplest case the measured values and reference values are transferred to the plant's control system. The measured values and status signals that are sent can also be fed to an emission calculator system for further processing, either via discrete signals (4 to 20 mA and configurable relay contacts) or via Modbus according to VDI 4201-3.

Quick-closing shutter

The swivel adapter can be optionally replaced with an adapter with a fully integrated quick-closing shutter. By using this quick-closing shutter the path between the measuring device and the waste gas is closed mechanically, but not airtight in the event of a fault (failure of power supply or purge air); the measuring device is temporarily protected against overheating in such cases. The measuring head takes over the control of the quick-closing shutter.

Weather protection covers

A weather protection cover is available to protect the measuring system when it is installed outdoors.

© Siemens AG 2014

Explosion proof design

An explosion proof design with pressurized enclosure according to EEx p, Zone 1 or Zone 2 is available for use in hazardous areas.

Function

The device operates according to the backscattering principle. The light of a laser diode illuminates the dust particles in the measuring volume of the flue gas duct. The light reflected by the particles is measured and evaluated.

The D-R 320 does not require a light trap. The background light in the stack is detected by means of a special optical system with an integrated dual detector and automatically compensated without manual adjustment.

The universal control unit D-ISC 100 can be connected for the measured value display, which allows up to eight dust and flow-rate measurement instruments.

The connected equipment can be operated and configured conveniently using the D-ISC 100. The display provides an immediate overview of the current measured values and the status of the measuring instruments.

Control functions

The D-R 320 automatically performs zero and span check as well as contamination check at regular intervals and on demand. The device features an automatic contamination correction. Need for maintenance is immediately indicated by the electronics.

Technical specifications

Measuring head	
Measured variable	Dust concentration
Measuring ranges	0 ... 5 mg/m^3 to 0 ... 200 mg/m^3
Measuring principle	Backscattering
Sample gas temperature	0 ... 600 °C
Sample gas pressure	-50 ... +50 hPa, optional higher
Duct diameter	0.7 ... 20 m
Ambient temperature	-40 ... +60 °C
Degree of protection	IP65
Measured value outputs	0/4 ... 20 mA, 400 Ω Modbus RTU bi-directional
Digital outputs	2 relay outputs, permissible load 60 V DC, 30 V AC/0.5 A
Digital inputs	None
Auxiliary power	24 V DC/0.5 A
Dimensions (H x W x D)	200 x 190 x 260/410 mm
Weight	15 kg
Supply box	
Purge air supply	Integrated blower
Supply voltage	115/230 V AC, 50/60 Hz, 0.37/0.43 kW
Dimensions (H x W x D)	480 x 450 x 320 mm
Weight	12 kg
Degree of protection	IP65

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-R 320 measuring instrument for a Siemens CEMS project.

© Siemens AG 2014

D-RX 250 combination probe

Overview

The combined probe sensor D-RX 250 is a single rod measurement probe for simultaneous measurement of dust concentration, volume flow, temperature and absolute pressure.

Benefits

- Only one probe/installation opening in the exhaust gas channel
- Compact design, no moving parts, no consumable parts
- Continuous conversion to normalized dust concentration in mg/Nm^3 and to normalized volume flow in Nm^3/h
- LCD display in mg/Nm^3, Nm^3/h, °C and hPa, one analog output for each measurement value
- Parameterization at the control unit without the need of a PC or other tools
- Remote connection of control and evaluation unit via two-wire bus interface up to 1000 m

Application

By combining four selected measuring functions in a single device it is possible to automatically calculate the pollutant mass flow for the preparation of the emission declaration in addition to monitoring the pollutant dust.

Areas of application

- For measurements in accordance with TIA Air (Technical Instructions for Maintaining Air Purity) 13., 17. and 27. BImSchV
- Not suitable for use behind electrostatic precipitators

Approvals

- Suitability-tested by the TÜV Cologne, test report 936/800006/A
- Itemized in the list of suitable measuring devices for continuous emission measuring
- MCERTS

Design

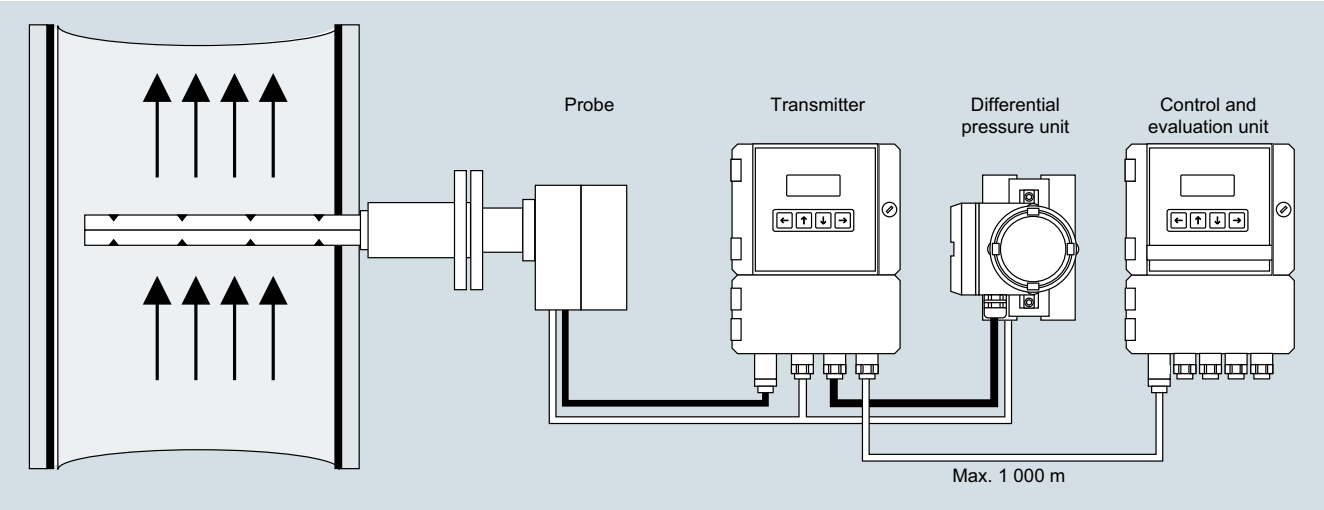

System components D-RX 250

Probe

The probe consists of the probe measuring rod and the measured value processing by the electronics in the measuring head. The probe measuring rod is a probe section that protrudes into the dust duct and is fastened with a flange in the duct. The probe measuring rod is insulated in design because of the triboelectric measurement and has two chambers for differential pressure measurement. The two chambers for pressure measurement are connected to a differential pressure transmitter. One of the two chambers is also connected to the absolute pressure transducer in the transmitter. The gas temperature is measured via a measurement resistance in a third chamber in the center of the probe section. The electronic measured value processing is performed in the probe housing. The temperature of the measurement resistance and the triboelectric raw value are determined here. The two raw values of temperature and tribo signal are transferred digitally to the transmitter.

Differential pressure transducer

The differential pressure transducer converts the differential pressure, created by the gas flowing in the probe measuring rod, into a gas velocity variable.

Transmitter

The transmitter provides the supply voltages for the probe and the measuring transducer for absolute pressure and differential pressure, reads in the raw measured values of these modules and transfer the measured values via the RS 485 interface to the evaluation unit. Through the RS 485 interface the transmitter reads the probe values of the triboelectric measured signal and the temperature.

The differential pressure transducer is connected to the transmitter by means of a two-wire cable. The absolute pressure transducer is located inside the transmitter housing. It receives the pressure from the chamber via a special rod.

© Siemens AG 2014

Control and evaluation unit

The control and evaluation unit reads out the raw measured values from the transmitter. The measured values for normalized dust concentration and normalized volume flow are calculated in the unit.

It is possible to output all analog values via Modbus or 4/20 mA signals and all status signals via isolated contacts.

Measured-value acquisition

In the simplest case a recorder is used to record the measured values and the reference values. The measured values and status signals that are output can also be fed into an emission calculator system for further processing.

Optional:

- Weather protection cover
- Change-over cock for back purging/zero point control
- Automatic cyclical probe back purging for high dust concentrations
- Hastelloy probes for corrosive gases
- Purge air connection at flange

Function

Dust concentration

The dust concentration is calculated according to the triboelectric measuring principle. The tribo probe measures the electrical charge of the incident particles.

Volume flow

The measurement of the volume flow is based on the mechanical action principle. The probe has two separate chambers, between which a differential pressure builds up under flow.

Absolute pressure

The absolute pressure in the flue gas is measured by a pressure transmitter in one chamber of the probe.

Temperature

The temperature is measured directly in the center of the flue gas in a separate chamber within the probe with a temperature sensor.

Technical specifications

D-RX 250 combined probe sensor	
Measurements	• Dust concentration • Volume flow • Pressure • Temperature
Measuring ranges	• 0 ... 10 to 0 ... 500 mg/Nm^3 • 0 ... 9 999 999 Nm^3/h[1)] • 800 ... 1300 hPa • 0 ... 200 °C, optional 0 ... 350 °C
Measuring principle	
• Dust	Tribo electric
• Volume	Differential pressure
Sample gas temperature	Above dew point up to 200 °C, optional up to 350 °C
Sample gas humidity	< 80%
Sample gas pressure	-200 ... +200 hPa
Duct diameter	0.3 ... 5 m
Ambient temperature	-20 ... +50 °C
Degree of protection	IP65
Measured value outputs	4 x 0/4 ... 20 mA, 500 Ω Modbus RTU (RS 485)
Digital outputs	7 relay outputs, permissible load 48 V/0.5 A
Digital inputs	6 isolated inputs
Accuracy	< 2% of the measuring range
Detection limit	< 2% of the measuring range
Reference point drift	< 1% of measuring range / month
Zero point drift	< 1% of measuring range / month
Auxiliary power	115/230 V AC, 50/60 Hz, 50 VA
Dimensions	
• Probes	180 x 180 x (340 + probe length) mm
• Probe length	250/400/700/1000 mm
Weight	
• Probe	9.5 kg
• Electronics	22 kg
Options	
Probe back purging, purge air supply	3 bar
Isolator purging, continuous purge air supply	Approx. 2 m^3/h

[1)] Flue gas velocity > 5 m/s concentration after gravimetric calibration

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-RX 250 combined probe sensor for a Siemens CEMS project.

© Siemens AG 2014

D-FL 100 volume flow measuring system

Overview

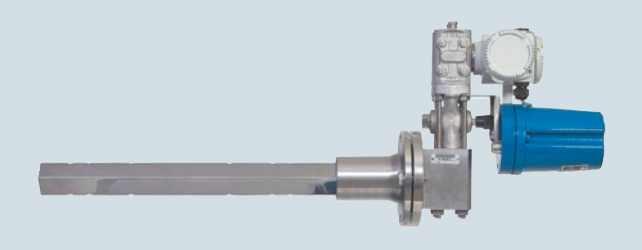

The D-FL 100 volume flow measuring system measures the flow rate in dry emissions with a probe using the differential pressure principle.

Benefits

- Measuring of emission speed
- Adjustable parameters
- Versions with or without counter-support and for point measurement
- Calculation of volume flow at standard conditions with evaluation unit D-FL 100-20
- Maintenance interval 6 months
- Automatic backpurging device (optional)

Application

As in-situ measuring system, the measuring equipment determines the measured values without sampling directly in the duct through which gas is flowing.

Areas of application

- Volume flow measurement at high temperatures
- Plants with small or large flue cross-sections
- Volume flow measurement at high pressure

Approvals

- Suitability-tested by the TÜV Cologne, test report 936/800006/A
- Itemized in the list of suitable measuring devices for continuous emission measuring
- MCERTS

Design

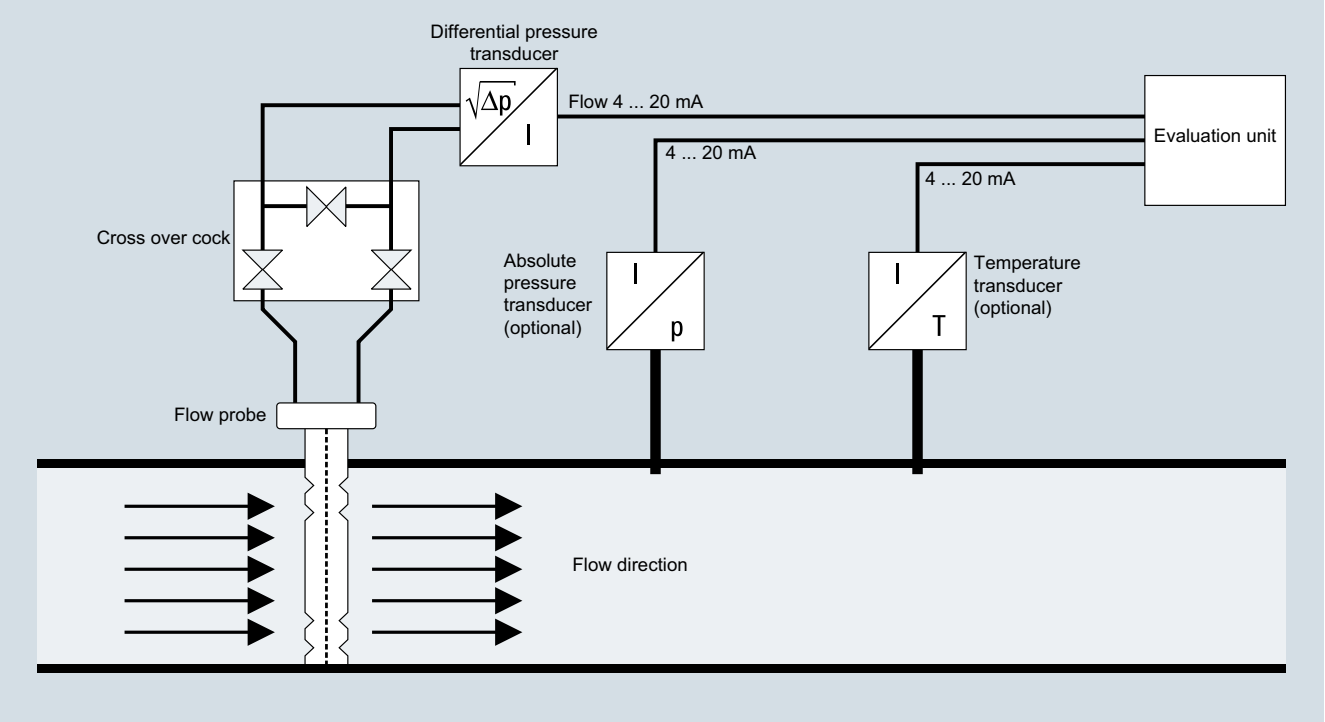

System components D-FL 100

Dynamic pressure probe

Each dynamic pressure probe of type D-FL 100 is a customized product for the respective measuring location. Three different sizes are available depending on the length of the planned measurement path:

- System 1: 22 x 24 mm^2 for 0.4 to 2 m length, with one-sided (max. 1 m) or two-sided mounting
- System 2: 50 x 53 mm^2 for 0.4 to 4 m length, with one-sided (max. 1.5 m) or two-sided mounting
- System 3: 90 x 100 mm^2 for 0.4 to 8 m length, two-sided mounting

© Siemens AG 2014

Adapter

The cross-over cock is either connected by an adapter to the differential pressure transducer directly on the probe (not for system 3) or via a hose or tube connection.

Cross-over cock

Cross-over device for the backpurging of the dynamic pressure probe

Differential pressure transducer

The transducer is delivered with factory set defaults for the order-specific configuration. The zero point should be calibrated after the installation.

Counter-support

A counter-support is required for a probe mounted on two sides. The counter-support supports the probe not only mechanically, but also enables the compensation of the temperature-dependent longitudinal expansion of the probe.

Mounting tubes with flange

Mounting tubes made of stainless steel 1.4571, adapted to the plant conditions, are available in various lengths. A single flange is required for a one-sided probe; otherwise two flanges are always required.

Optional:

Evaluation unit

The evaluation unit D-FL 100-20 evaluates the measured signal from the differential pressure transducer. A 4 to 20 mA current signal is available as measured value output. A Modbus interface according to VDI 4201 for the connection of an emission evaluation calculator with digital interface is available in addition to the 4 to 40 mA current signal output. The front panel contains five LEDs and one USB port. The LEDs signal the system's current status/operating state.

The various parameters, such as standard density, substitute values for pressure and temperature in the exhaust gas duct, k-factor and measuring ranges are input via the USB port with the help of a PC or the associated software D-ESI 100.

Software D-ESI 100

Software for assigning parameters, visualizing the measured data, and carrying out AST, QAL2 and QAL3 for D-FL 100-20.

The D-ESI 100 can be parameterized, maintained and (when faults occur) analyzed via the USB port with the help of a PC and the associated software.

Universal control unit D-ISC 100 with evaluation unit D-FL 100-20

The connected equipment can be operated and configured conveniently using the D-ISC 100. The display provides an immediate overview of the current measured values and the status of the measuring instruments.

Automatic back purging unit

An automatic back purging device to keep the measuring openings clean is available for applications with high dust loads.

Weather protection covers

A weather protection cover is available to protect the probe head and the back purging control when the measuring system is installed outdoors.

Additional options:

- Absolute pressure transducer
- Temperature transducer
- Special designs in other materials for applications with particularly aggressive exhaust gases or higher gas temperatures: Standard material for probe stainless steel 1.4571, depending on measurement task also Hastelloy, Inconel or other materials
- dP transducer in Ex-version

Function

The D-FL 100 measuring system operates according to the mechanical action principle. The probe has two separate chambers, between which the flow builds up a differential pressure. Taking account of the other flow parameters such as absolute pressure and temperature, for example, the volume flow can be converted from operating to standard conditions with the help of the D-FL 100-20 evaluation unit.

Technical specifications

Measuring system D-FL 100	
Measurements	• Flue gas velocity • Volume flow[1)]
Measuring ranges	• 2 ... 50 m/s • 0 ... 3 000 000 m^3/h
Measuring principle	Differential pressure
Sample gas temperature	Above dew point up to 450 °C, optional up to 850 °C
Sample gas pressure	-200 ... +200 hPa, optional higher
Duct diameter	0.4 ... 8 m
Ambient temperature	-20 ... +50 °C
Degree of protection	IP65
Measured value output	0/4 ... 20 mA, 500 Ω
Digital outputs	2 relay outputs, permissible load 48 V/0.5 A
Digital inputs	None
Accuracy	< 2% of the measuring range
Detection limit	< 3 m/s
Reference point drift	< 0.5% of measuring range / month
Zero point drift	< 0.5% of measuring range / month
Auxiliary power	18 ... 32 V DC/1 A, 90 ... 264 V AC, 48 ... 62 Hz, 100 VA
Dimensions	
• Probes	380 x 160 x (300 + probe length) mm
• Probe length	0.4 ... 2/0.4 ... 4/0.4 ... 8 m
Weight	32 kg + 6.8 kg/m probe length
Purge-air supply (optional)	6 ... 8 bar for back purging

1) Optional pressure and temperature correction

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-FL 100 measuring system for a Siemens CEMS project.

© Siemens AG 2014

D-FL 220 volume flow measuring system

Overview

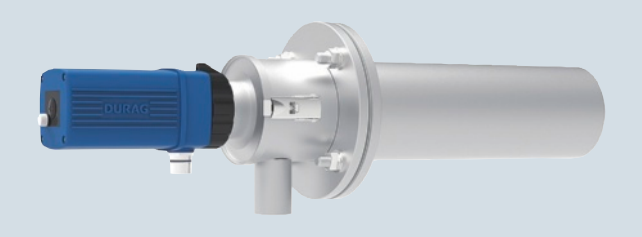

The D-FL 220 is a volume flow measuring system for ultra-sonic measuring of flow and volume flow, especially for wet and aggressive smoke emissions.

Benefits

- In-situ measuring method
- Measurement possible below dew point and for high dust concentrations
- Continuous measurement of normal volume flow and gas velocity
- Automatic zero point and reference point control
- Digital signal processing
- Remote access possible, digital interface according to VDI 4201-3
- Operation with or without control unit
- Very low maintenance

Application

As in-situ measuring system, the measuring equipment determines the measured values without sampling directly in the duct through which gas is flowing.

Areas of application

- Volume flow measuring at low speeds
- Plants with damp and/or aggressive exhaust gas, for example, in waste incineration plants
- Volume flow measurement at high dust content

Approvals

- Suitability-tested by the TÜV Cologne, test report 936/21218490/A
- Itemized in the list of suitable measuring devices for continuous emission measuring

Design

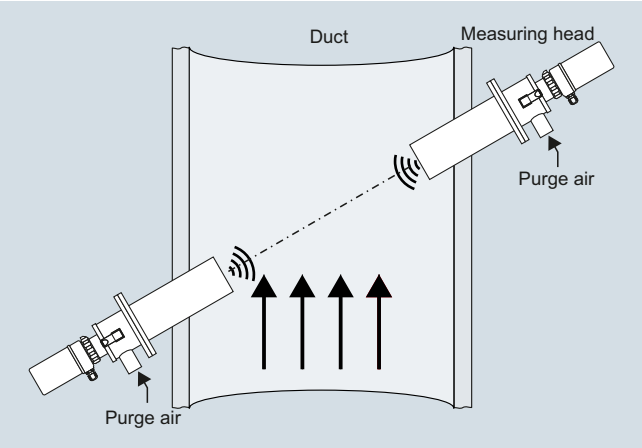

System components D-FL 220

Measuring heads

Two identically designed measuring heads, set for type A and type B, are used. Depending on the application data, different depth-of-penetration lengths are required, for example, from 100 to 1100 mm.

Stainless steel 1.4571 is used as probe material. The housing is made of impact-proof polyamide.

A 4 mA to 20 mA current signal is available as measured value output which measures the velocity and/or the volume flow and can be connected, for example, to a emission evaluation calculator or a recorder. Two relay contacts are available for signaling. Also available is a Modbus interface according to VDI 4201-3 for the connection of an emission evaluation calculator with digital interface. The various parameters are entered during the installation on site. The USB port is on the rear.

Purge flanges

The purge air which cools the ultra-sonic transducer and keeps it clean is supplied via purge flange (one for each measuring head). A toggle-type fastener connects the purge flange to the measuring head.

Mounting tubes with flange

Mounting tubes made of stainless steel 1.4571 or of glass-fiber reinforced plastic, adapted to the plant conditions, are available.

Purge air unit

A hose connects the two measuring heads to the purge air unit. The filtered air is used to cool the measuring heads and to keep the transducers clean.

Terminal box

Terminal box to output the data with connecting cable for the two sensors and customer terminal strip.

Software D-ESI 100

Software to assign parameters, to visualize the measured data, and to carry out AST, QAL2 and QAL3.

The D-ESI 100 can be parameterized, maintained and (when faults occur) analyzed via the USB port with the help of a PC and the associated software.

Optional:

Universal control unit D-ISC 100

The connected equipment can be operated and configured conveniently using the D-ISC 100. The display provides an immediate overview of the current measured values and the status of the measuring instruments.

Weather protection covers

Weather protection covers are available to protect the measuring heads when the measuring system is installed outdoors.

Additional options:

- Absolute pressure transducer
- Temperature transducer

© Siemens AG 2014

Function

The D-FL 220 measuring system operates according to the acoustic transit time differential method.

Two identical sensors transmit and receive ultra-sonic pulses reciprocally. The system calculates precisely the gas velocity and the gas temperature from the transit time difference dependent on the direction. The volume flow is calculated taking into consideration the cross-section, the sample gas temperature and the absolute pressure. The D-FL 220 performs internal self-monitoring routines and is very low maintenance.

Technical specifications

Measuring system D-FL 220	
Measurements	• Flue gas velocity • Volume flow[1)] • Temperature
Measuring ranges	• 0 ... 40 m/s • 0 ... 3 000 000 m^3/h • 0 ... 400 °C
Measuring principle	Ultrasonic transit-time differential
Sample gas temperature	0 ... 300 °C, optional higher
Sample gas pressure	-50 ... +20 hPa, optional higher
Duct diameter	0.5 ... 13 m, temperature-dependent
Ambient temperature	-20 ... +50 °C, measuring head: -40 ... +70 °C
Degree of protection	IP65
Measured value output	0/4 ... 20 mA, 400 Ω Modbus RTU bi-directional
Digital outputs	2 relay outputs, permissible load 48 V/0.5 A
Digital inputs	None
Accuracy	< 2 %
Detection limit	< 0.3% of measuring range
Reference point drift	< 0.3% of measuring range / month
Zero point drift	< 0.2% of measuring range / month
Auxiliary power	24 V DC/0.5 A
Dimensions standard measuring head	Ø 190 x 570 mm
Weight	17 kg
Purge air supply	
Purge air quantity	Approx. 80 m^3/h
Auxiliary power	115/230 V, 50/60 Hz, 0.37/0.43 kW
Dimensions (H x W x D)	350 x 550 x 500 mm
Weight	12 kg
Degree of protection	IP55

[1)] Optional pressure and temperature correction

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-FL 220 measuring system for a Siemens CEMS project.

© Siemens AG 2014

D-ISC 100 display and control unit for dust and volume flow measuring instruments

Overview

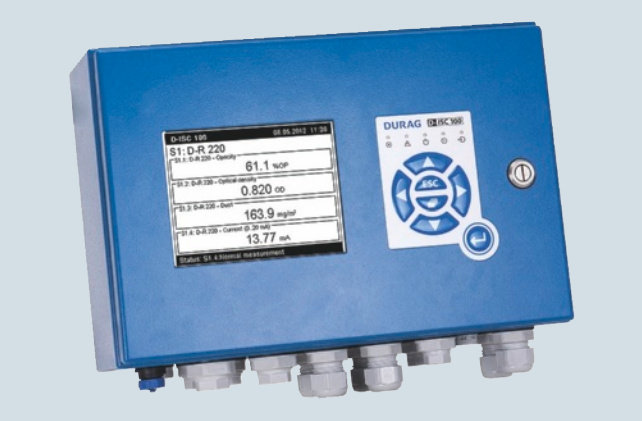

The D-ISC 100 universal control unit permits the connection of up to 8 sensors combining dust and volume flow measurements on one display.

Benefits

- Connection of up to 8 sensors
- Large liquid crystal display (LCD) for display of the measured values
- Automatic detection of connected sensors
- Easy parameter assignment of connected sensors
- Operation locally via membrane keyboard or USB port, or remote control via the RS 485 interface
- Modular design, four slots available for extension modules
- Slot for external converter
- No maintenance costs
- Easy to update via SD card

Application

The control unit can supply a single sensor or a system consisting of two sensors with power. Several sensors that are connected via a network can also be connected to the D-ISC 100. In this case each of the sensors must be supplied with power by means of a separate terminal box, supply unit or evaluation unit. Modbus links the sensors to each other and to the D-ISC 100.

The display provides an immediate overview of the status of the connected devices. The current measured values can be displayed without the necessity of direct access to the sensors. It is also possible to visualize the measured values with bar chart display.

The connected sensors can be queried, controlled and parameterized with the control unit. Operation takes place directly via the membrane keyboard of the control unit. Alternatively, you can connect a PC via the integrated USB port. In conjunction with the Web server technology software D-ESI 100, remote support is possible via the Internet.

The control unit features four slots for extension modules, for example, Modbus RTU or analog / digital input and output modules.

You also have the option of including an external converter (e.g. PROFIBUS DP) inside the unit. This eliminates the need for an additional housing in equivalent degree of protection.

Approvals

Type-tested according to European directive EN 15267 for continuous emission measurements in connection with the test reports no. 936/21217455, 936/21218492 and 936/21218490 of the Technical Inspectorate of the Rhineland region (TÜV Rheinland)

Design

The following functions can be added to the D-ISC 100 control unit by means of plug-in modules:

- Modbus RTU module
- Analog input module with four analog inputs: 0 to 20 mA with 2/4 mA live zero, burden 50 Ω
- Analog output module with four analog outputs: 0 to 20 mA with 4 mA live zero, max. burden 400 Ω
- Digital input module with eight digital inputs
- Digital output module with eight digital outputs

© Siemens AG 2014

Technical specifications

Basic unit	
Output signal	0 ... 20 mA, zero point 4 mA
Maximum burden	400 Ω
Relay outputs	3 x status, isolated (limit value, fault, control cycle, etc.)
Maximum switching power	48 V/0.5 A
Inputs	1 x function, isolated
Ambient temperature	-20 ... +50 °C, optional -40 ... +60 °C
Electrical data	
Line voltage	90 ... 264 V, 48 ... 62 Hz
Power	Approx. 100 W
Auxiliary power for sensors	24 V DC/2 A
Mechanical specifications	
Material	Stainless steel 1.4301
Color	RAL 5017
Degree of protection	IP65
Weight	5 kg
Dimensions (H x W x D)	130 x 330 x 220 mm

Expansion options	
Modbus RTU module	
Interface	RS 485, serial
Baud rate	9600 ... 57 600 Bd
Analog input module	
Output signal	0 ... 20 mA, zero point 0/2/4 mA adjustable
Load	50 Ω
Analog output module	
Output signal	0 ... 20 mA, zero point 4 mA
Maximum burden	400 Ω
Digital input module	
Inputs	8 x function, isolated
Digital output module	
Relay outputs	8 x status, isolated (limit value, fault, control cycle, etc.)
Converter module	
Type	PROFIBUS DP

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-ISC 100 control unit for a Siemens CEMS project.

© Siemens AG 2014

D-EMS 2000 Environmental and process data management system

Overview

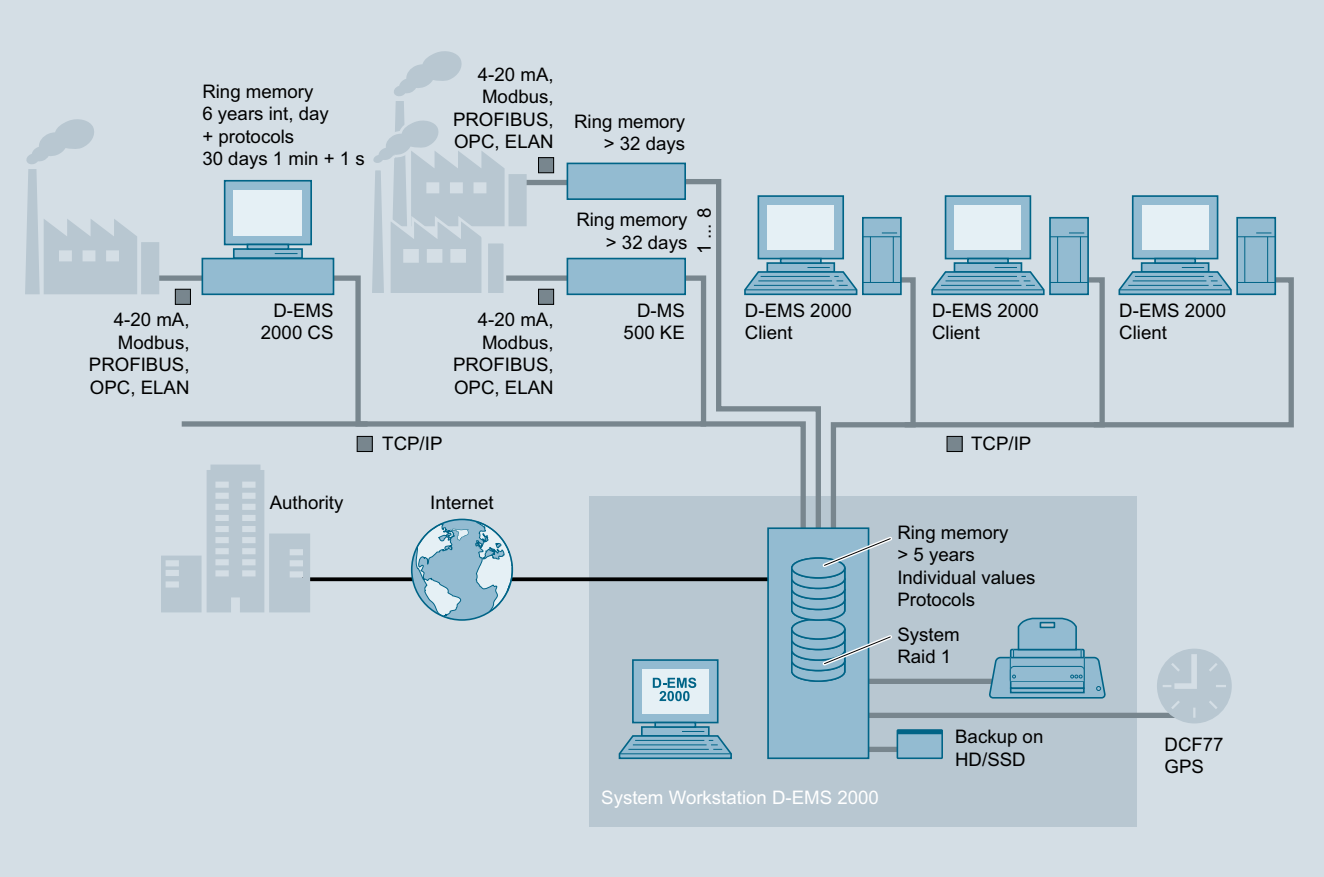

The D-EMS 2000 environmental and process data management system is a modular system for the continuous acquisition, long-term storage, calculation and visualization of environmental and process data.

Benefits

- Instrument for monitoring legally prescribed limit values and recording their observance
- Emission monitoring and remote data transmission to the authorities
- Corresponds to EU directives 2000/76/EU, 2001/80/EU and 2010/75/EU
- Adjustable to any plant size through to complete assessment of complex industrial sites
- Continuous monitoring of 1 to 320 components per system workstation
- Interconnection of any number of components via data networks
- Visualization available in 19 languages

Application

The D-EMS 2000 standard system is designed for small to medium sized industrial sites whose emission data, immission data or process data must be recorded in line with government regulations for measured data logging.

Approvals

- Suitability-tested by TÜV in accordance with German TA-Luft, 1., 2., 13., 17., 27., 30. and 31. BImSchV
- Itemized in the list of suitable systems for evaluation of continuous emission measuring
- Certified according to DIN EN 15267-2
- MCERTS certified

Design

Measured data acquisition:

- Analog/digital inputs as
  - 19" rack with ring memory
  - Local DIN rail modules
- Data communication via bus systems, Modbus RTU/ TCP, PROFIBUS, Elan, OPC UA

© Siemens AG 2014

Function

Data sources

- Emission data
- Immission data
- Meteorological data
- Water data
- Process data

Data export

- Data interface to MS-Excel with option of further measured data evaluation, e.g. for fulfillment of environmental protection officer's reporting duties
- Measured data can be transferred to authorities via standard remote communication or via Internet
- Merging of measured data e.g. for greenhouse emission trading
- Remote service interface for fast and cost effective service

Data security

- Industrial type evaluation PC with vibration-proof hard disks in RAID 1 array and special air cooling with filter system
- Paperless data storage to replace recorders and printers is possible through integrated data security, which is guaranteed on several levels in the system
- Intermediate storage of the raw input values at minute intervals in data communication unit D-MS 500 KE
- Storage of raw input values in one-second intervals
- Data backup on external redundant drive

Internet/intranet connection

- Data transmission to an Internet server with HTML standard masks via standard software (MS Internet Explorer)
- Password protected control of daily emission values including the classification records

Visualization

- Measured data logging according to official regulations
- Classification tables, daily, monthly and annual records
- Representation of current, prognostic and historic measured data in bar/linear form
- Pollutant compensation, characteristics curve and correlation
- Automatic alarm and information system

Annual emission declaration

- Automatic preparation of annual emission declaration, from the individual values stored in the system, according to 11. BImSchV
- Compatible with official software, import/export module
- Automatic filling in of forms
- Reading in of historical emission declarations

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-EMS 2000 environmental and process data management system for a Siemens CEMS project.

© Siemens AG 2014

D-EMS 2000 CS Environmental and process data management system

Overview

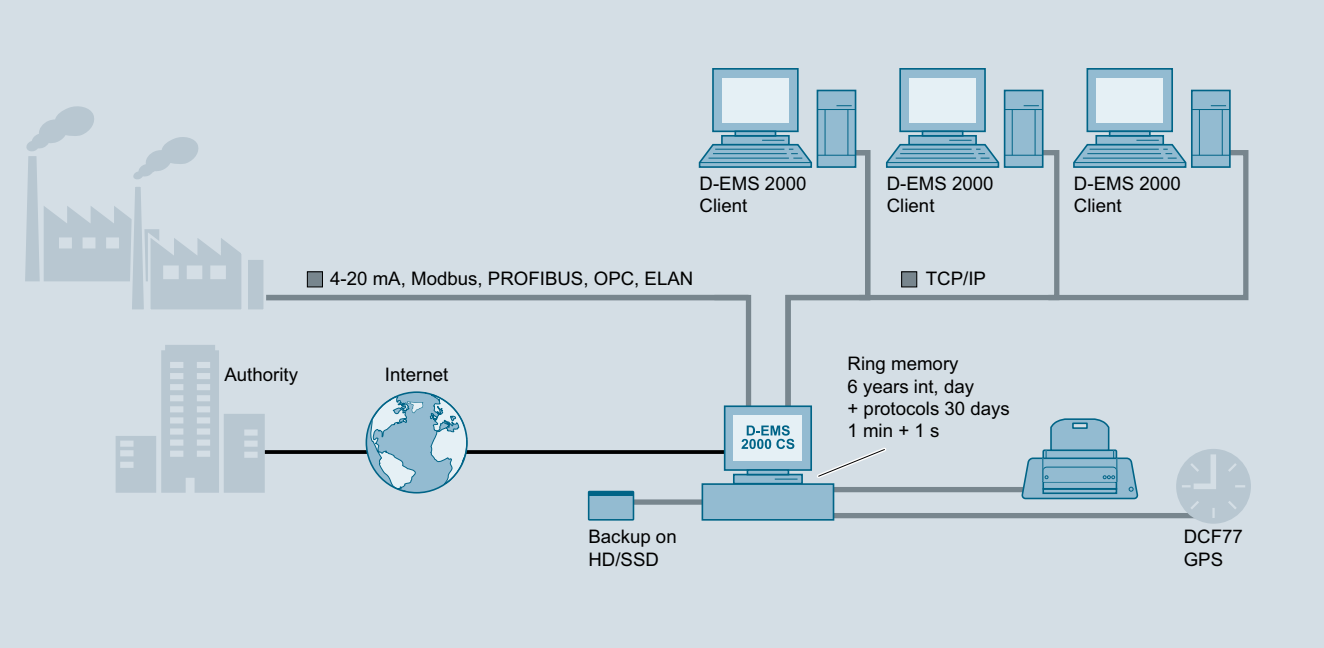

The D-EMS 2000 CS environmental and process data management system is an affordable compact system for small to medium plants.

Benefits

- Independently operating module for the acquisition, long-term storage, calculation and visualization of environmental and process data
- Instrument for monitoring legally prescribed limit values with automatic recording
- Continuous monitoring of 1 to 12 components, connected via bus communication or hard-wired
- Compact system, no additional evaluation PC required
- Windows-based and certified D-EMS 2000 software
- All modules of the D-EMS 2000 system can be used
- Visualization available in 19 languages

Application

The D-EMS 2000 CS compact system is designed for small to medium sized industrial plants whose emission data, immission data or process data must be recorded in line with public authority regulations for measured data logging.

Approvals

- Suitability-tested by TÜV in accordance with German TA-Luft, 1., 2., 13., 17., 27., 30. and 31. BImSchV
- Itemized in the list of suitable systems for evaluation of continuous emission measuring
- Certified according to DIN EN 15267-2
- MCERTS certified

Design

Three available device types:

- Compact system in 19", 3HU rack
- Desktop version with monitor / keyboard / mouse
- 19", 1HU slide-in unit with extendable keyboard and hinged monitor

Technical specifications

Device versions	• Compact system in 19", 3HU rack • Desktop version with monitor/ keyboard/mouse • 19" slide-in assembly
PC	Intel based dual-core PC with Windows 7 Pro & 8, 2 GB RAM and 120 GB SDD
Inputs / outputs	Max. 3 cards: • Combination card 4 AI, 8 DI, 2 AO, 4 DO • Input card 8 AI, 15 DI • Output card 8 AO • Output card 16 DO
Connection of bus systems	• Modbus RTU/ TCP, PROFIBUS, Elan, OPC UA • Analog/digital inputs: 12/24 • Analog/digital outputs: 12/24
Interfaces	• 1 x VGA • 2 x USB • 1 x RJ 45 • 3 x serial (RS 232 or RS 485) • BNC for DCF77 - radio clock
Ambient temperature	5 ... 40 °C
Degree of protection	IP20
Operating voltage	115/230 V AC, 50/60 Hz, 100 VA

More information

Please consult your Siemens sales partner for information on how to correctly configure and order a D-EMS 2000 CS compact system for a Siemens CEMS project.

© Siemens AG 2014

Overview

The Set BGA (**b**io**g**as **a**nalyzer) is a standardized system for stationary, continuous operation for the analysis of landfill gas, sewage gas or biogas.

Benefits

Standardized complete system

The standardized complete system has a modular configuration and can thus be used at various measuring locations for different measuring tasks.

- Simple and fast to configure
- Field-tested and matched Set in rugged industrial design
- Extremely high long-term stability
- The Set BGA is based on the proven ULTRAMAT 23

Field-proven, reliable technologies

- Autocalibration function with ambient air reduces the maintenance requirements
- Detonation protection in accordance with EN 12874
- Modular system design based on long-term tested components
- LEL sensor for cabinet monitoring (optional)

Simple operation

- Intuitive menu guidance
- Configuration on large displays with plain text
- Two freely-configurable limits per measured component

Application

The efficiency of biogenic production processes and optimum operation of the plant largely depends on continuous monitoring of the biogas composition. The basic version of the Set BGA analyzes CH_4 and CO_2 using the proven ULTRAMAT 23 IR analyzer. The concentrations of O_2 and H_2S are optionally measured using electrochemical sensors and also converted into output signals of 4 to 20 mA. In this manner, the Set BGA contributes to operational safety and explosion protection in addition to process optimization.

The modular design of the system takes into account the physical conditions of the gas with regard to temperature and moisture in that various gas preparation components for heating or drying the sample gas can be configured as required.

The gas mixture can be explosive at critical concentration ratios between methane and oxygen. Even if such critical gas compositions occur extremely rarely, the danger of ignition must nevertheless be avoided. For this reason, the Set BGA is designed with a high safety standard and even the basic version is equipped with flow monitoring and detonation protection in accordance with EN 12874 in the sample gas path. To increase safety even further, a gas sensor for monitoring the ambient air can be connected as an option.

It is also possible to monitoring up to four measuring points using an optional sample switching cabinet. In this case the sample flows are sucked in continuously using a powerful pump in order to achieve fast measuring times.

© Siemens AG 2014

Design

The Set BGA consists of the following components:

- ULTRAMAT 23 analyzer with four measured components max.
- Analyzer cabinet with modularly configurable gas preparation components
- Cabinet for measuring point switchover (option)
- Heated line (option)

The ULTRAMAT 23 is selectable with two IR components (CO_2 and CH_4). Furthermore, the configuration can be equipped with an electrochemical oxygen sensor and/or an electrochemical hydrogen sulfide sensor. The corresponding measuring ranges are listed in the table below.

Measured component	Smallest measuring range	Largest measuring range
CO_2	0 … 20 %	0 … 100 %
CH_4	0 … 20 %	0 … 100 %
O_2	0 … 5 %	0 … 25 %
H_2S (high)	0 … 500 ppm	0 … 5 000 ppm
H_2S (low)	0 … 5 ppm	0 … 50 ppm

The ULTRAMAT 23 calibrates the IR components and the electromechanical oxygen sensor automatically with ambient air. Calibration with calibration gas is recommended once a year or after oxygen sensor replacement. In order to comply with the technical specification data, the hydrogen sulfide sensor must be calibrated every three months. An appropriate calibration gas is therefore required. It is supplied to the analyzer through a manually switchable ball valve.

Set BGA measuring system

2-stream sample preparation

Technical specifications

Technical data of Set BGA	
Installation	
Ambient temperature	5 … 38 °C, with cabinet heating ± 0 °C
Site	Indoor/outdoor installation (configurable)
Gas inlet conditions	
Sample gas pressure	• With pump, depressurized suction mode, selectable with internal or external pump • Provision must be made for a pressure reduction for pressures greater than 1 200 mbar absolute
Pump performance	Adjustable to 60 … 80 Nl/h
Sample gas temperature	Max. 45 °C, with moisture saturation
Power supply	
Supply 1	200 … 240 V AC, 47 … 63 Hz
Supply 2	100 … 120 V AC, 47 … 63 Hz
Power consumption	Approx. 180 VA (without cooler and sample preparation)
Connection systems	
Teflon hose	With PVDF screwed glands
Connection systems	Metric (6 mm) or imperial (1/4") selectable
Dimensions	
Set BGA measuring system (W x H x D)	600 x 781 x 600 mm
Sample preparation (W x H x D)	600 x 600 x 220 mm
Weight	
Set BGA measuring system	Approx. 50 kg
Sample preparation	Approx. 22 kg
System design	
System housing	3-part sheet-steel housing with window
Degree of protection	IP54
Cabinet conditioning	Fan
Cooling system	Peltier cyclone cooler (optional)
Sample preparation	Max. six sample streams can be controlled using Logo module with fast loop pump in separate housing
Analog outputs	Per component 0/2/4 … 20 mA; NAMUR, floating, max. load 750 Ω
Measured components / measuring ranges	
CH_4	0 … 100 vol% to 0 … 20 vol% (NDIR)
CO_2	0 … 100 vol% to 0 … 20 vol% (NDIR)
O_2	0 … 25 vol% to 0 … 5 vol% (electrochemical or paramagnetic optionally selectable)
H_2S	0 … 5 000 ppm (electrochemical); optional 0 … 5 ppm to 0 … 50 ppm (electrochemical); optional
Safety assemblies	
Assembly 1	Detonation protection F501
Assembly 2	Flow measurement with limit monitoring at the output
Assembly 3	LEL monitoring (optional)
Comment	• The system concept of the Set BGA is based on the preconfigured ULTRAMAT 23 solutions (7MB2335-…, 7MB2337-…) • The technical performance data concerning the measuring response correspond to the catalog data of the ULTRAMAT 23. The preconfigured version does not contain any ULTRAMAT 23 add-ons or retrofitting sets.

© Siemens AG 2014

Selection and ordering data

	Article No.												
Set BGA basic configuration, including flame arrestor	↗ **7MB1955-**	■	■	■	■	■	-	■	■	■	■		Cannot be combined
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.													
Gas connections, external													
6 mm		**0**											
¼ inch		**1**											
Sample conditioning													
Without gas cooling			**A**										
Passive cooling (supplied separately)			**B**										
Peltier cooler, integrated in Set BGA enclosure			**C**										
Enclosure design													
Not heated				**A**									
Electrically heated				**B**									
Pump design													
Without pump					**0**								
Internal pump in analyzer					**1**								
External pump, fitted in Set BGA enclosure					**2**								
Power supply													
AC 120 V, 60 Hz						**0**							
AC 230 V, 50 Hz						**1**							
AC 110 V, 50 Hz						**2**							
AC 220 V, 60 Hz						**3**							
Infrared measured components													
Version with one measured component								**0**					
Highly selective ULTRAMAT 23 single-beam infrared gas analyzer for measuring methane; mounted in 19-inch rack unit for installation in wall cabinet													
Specification: • ·Measured component CH4 - Smallest measuring range: 0 ... 20 % - Largest measuring range: 0 … 100 %													
Version for two measured components								**1**					
Highly selective ULTRAMAT 23 single-beam infrared gas analyzer for measuring carbon dioxide and methane; mounted in 19-inch rack unit for installation in wall cabinet													
Specification: • 1. Measured component CO2 - Smallest measuring range: 0 ... 20 % - Largest measuring range: 0 … 100 % • 2. Measured component CH4 - Smallest measuring range: 0 ... 20 % - Largest measuring range: 0 … 100 %													
Version with one measured component								**2**					
Highly selective ULTRAMAT 23 single-beam infrared gas analyzer for measuring carbon dioxide; mounted in 19-inch rack unit for installation in wall cabinet.													
Specification: • Measured component CO2 - Smallest measuring range: 0 ... 0.5% - Largest measuring range: 0 … 2.5%													
Oxygen measurement													
Gas analyzer without oxygen sensor									**A**				
Electrochemical oxygen sensor; sensitive to CO2									**B**				
Specification: • Smallest measuring range: 0 ... 5 % • Largest measuring range: 0 ... 25 % • Repeatability: approx. 0.05% O2													
Paramagnetic oxygen measuring cell; no sensor wear									**C**				**C**
Specification: • Smallest measuring range: 0 ... 2% • Largest measuring range: 0 ... 100% • Repeatability: < 1% of smallest measuring range													

© Siemens AG 2014

Set BGA

Set BGA basic configuration, including flame arrestor	**7MB1955-** ■ ■ ■ ■ ■ - ■ ■ ■ ■	Cannot be combined
H_2S measurement		
Without H_2S sensor	**A**	
With H_2S sensor, 0 … 5 000 ppm	**B**	**B**
With H_2S sensor, 0 … 5 ppm to 0 … 50 ppm	**D**	**D**
Documentation		
German, 1 set (paper and CD)	**0**	
English, 1 set (paper and CD)	**1**	
French, 1 set (paper and CD)	**2**	

Further versions (add-ons)	
Add "-Z" to Article No. and specify Order code	
Heated sample gas line, self-regulating, Ex-proof	
Length: 5 m, supplied separately	**A01**
Length: 10 m, supplied separately	**A02**
Length: 15 m, supplied separately	**A03**
Length: 20 m, supplied separately	**A04**
Length: 25 m, supplied separately	**A05**
Length: 30 m, supplied separately	**A06**
Length: 35 m, supplied separately	**A07**
Communication	
PROFIBUS PA interface	**A12**
PROFIBUS DP interface	**A13**
Fast loop design and sample switching	
2-stream sample switching with Logo and external pump	**B02**
3-stream sample switching with Logo and external pump	**B03**
4-stream sample switching with Logo and external pump	**B04**
5-stream sample switching with Logo and external pump	**B05**
6-stream sample switching with Logo and external pump	**B06**
Gas sensor for leak monitoring of the Set BGA system	
Alarm monitoring: 20 % LEL methane	**C01**

© Siemens AG 2014

Overview

The standardized Set GGA (Generator Gas Analyzer) has been specially designed for monitoring hydrogen-cooled turbo generators.

Benefits

Standardized complete system

- Simple and fast to configure
- Field-proven, harmonized and reliable set
- Low purchase price and economic operation
- Suitable for optimizing the efficiency of H_2-cooled turbo generators

Field-proven, reliable technologies

- High-precision and reliable purity monitoring of hydrogen
- Microchip-based thermal conductivity measurement
- Redundant measuring system
- SIL 1 certificate for the analysis hardware

Simple operation

- Intuitive menu prompting
- Configuration on large displays with plaintext
- Use of CO_2 and AR as inert gas possible

Application

This set is used in power generation applications.

Turbo generators in power plants are cooled with gas in order to increase their efficiency. In spite of the strict safety requirements hydrogen is used as a cooling gas. This offers huge advantages over air. These include considerably better cooling properties, lower friction loss on rotating parts, and a higher electrical breakdown strength. These features enable hydrogen to satisfy the requirements for the turbo generator to reach an optimum level of efficiency.

However, mixtures of hydrogen and air with a hydrogen content of anything from 4 to 77 % are explosive. For safety reasons, it is imperative that this is prevented during operation filling and emptying of the turbo generators. International standards (EN 60034-3 and IEC 842) state that redundant safety monitoring with two independent operating systems must be used for this.

In addition, contamination of the hydrogen cooling gas reduces the efficiency of the turbo generator, as it leads to considerably higher friction loss. For a 970 MW generator, a difference of 4% is equivalent to a 0.8 MW difference in power. There are also good reasons related to cost-effectiveness why the cooling gas should be continuously monitored for contamination.

The Set GGA is a complete solution for monitoring hydrogen-cooled turbo generators, with the dual benefit of being simple to handle and having low initial investment costs.

Design

The Set GGA is available in the following versions:

- Generator Gas Analyzer (GGA)
- GGA with test gas skid
- GGA with test gas skid and installation frame

Analyzers

The GGA contains two CALOMAT 6E analyzers (19" rack unit versions). From the gas sampling system right through to the gas outlet, these are completely separate from one another, thereby ensuring full redundancy.

The CALOMAT 6E is a continuous gas analyzer for determining H_2 and He in binary or quasi-binary gas mixtures.

To measure the hydrogen and inert gases continuously, the exact thermal conductivity of the sample gas mixture is measured and the concentration calculated from this. Only binary gas mixtures can be directly measured.

The CALOMAT 6E is used to measure 0 to 100 % CO_2/Ar in air, 0 to 100 % H_2 in CO_2/Ar or 80 to 100 % H_2 in air, in the context of monitoring hydrogen-cooled turbo generators, on account of its high measuring range dynamics.

The units are approved for use in ATEX Zone 2. Gas mixtures may also be fed in according to the definition of Zone 1. In terms of tightness and compressive strength, the measuring cell and entire physical structure of the gas path, from inlet to outlet, are certified up to 55 000 hPa . This is much higher than the pressure that arises when oxyhydrogen gas is ignited.

A flame arrestor at the sample gas inlet provides additional safety.

The integrated LCD display shows the measured values, status bar and measuring ranges simultaneously.

The T90 time is less than 5 s. This means that the delay between the measurement and displaying the result is very short.

Tests carried out under harsh field conditions have indicated that the 3-week drift of the measurement results is less than 0.1 %. Combined with a repeatability value of 0.1 %, this ensures that the measurement results gathered will be both accurate and precise.

© Siemens AG 2014

Analyzer cabinet

Another feature of the GGA is a protective cabinet for the analyzers. This provides a compact location where the system can be easily installed, and offers protection against dust and water. The system is approved in accordance with IP54 degree of protection.

The cabinet measures 616 x 615 x 600 mm (H x D x W) and is made from painted sheet steel.

A key advantage of this type of construction is that it eliminates the need for a restricted breathing enclosure, allowing maintenance to be carried out without any difficulty. If a restricted breathing enclosure is required, it must be ensured that the system is operated in an airtight room. Restoring the restricted breathing enclosure once maintenance procedures have been performed is a costly and time-consuming process.

To keep operating and maintenance costs low, the GGA set supports natural cabinet ventilation and a filter element provides protection against particles of dirt. Purging with instrument air is not necessary.

Test gas skid

The analyzers and analyzer cabinet are supplied as part of the basic configuration of the set. As an option, however, it is also possible to obtain a suitable test gas skid on a mounting plate.

The test gas skid is responsible for preparing the extracted sample ready for analysis. This ensures that the sample, calibration and inert gases are fed into the analyzers at the right pressure and flow rate, and without having been mixed with other gases.

The skid is fully equipped with a flame arrestor, stopcock ball valve, stainless steel overflow regulator, single-stage pressure reducer, stainless steel 5-way transfer ball valve, all-metal flow meter for air, 1-channel isolating switch amplifier and installation material. The flowmeters are designed to transmit a limit monitoring signal. The connection is made on-site.

The test gas skid guarantees that all the requirements in terms of safety, quality and simplicity are satisfied when connecting sample, calibration and inert gases.

Installation frame

The installation frame is a supplementary feature of the set. It enables free-standing installation of the analyzer cabinet and test gas skid.

The installation frame is supplied in a fully assembled state (including feet). Its overall height is 2 000 mm.

Function

There are three distinct processes in monitoring hydrogen-cooled turbo generators: normal operation, filling and emptying. The measuring task entails preventing a gas mixture of hydrogen and air outside the specified limits, or detecting the risk of this happening in good time, as well as monitoring the hydrogen purity.

During normal operation, the purity of the generator cooling gas is monitored. If the purity falls below a specific limit (e.g. < 95 % H_2), a message is output. The monitored range is 80 to 100 % H_2 in air.

Filling the generator is a two-stage procedure: first, the air in the generator is replaced by inert gas (argon or CO_2), and then this is replaced by hydrogen. During this, the concentration trends of the gases are measured and the replacement processes monitored. To prevent explosive mixtures from being formed, it is necessary to monitor the measuring range of 0 to 100 % inert gas in air in the first step and 0 to 100 % H_2 in inert gas in the second step.

The procedure is performed in reverse when emptying the generator: The hydrogen is first replaced with inert gas and the generator is then filled with air. The measuring tasks remain unchanged in this case. Here it is necessary to monitor the measuring ranges of 0 to 100 % H_2 in inert gas first, and then 0 to 100 % inert gas in air.

© Siemens AG 2014

Technical specifications

Climatic conditions	
Ambient temperature	5 ... 50 °C
Relative humidity	70 %, non-condensing
Corrosive atmosphere	No
Gas inlet conditions	
• Calomat 6E	
- Sample gas pressure	800 ... 1 100 hPa (absolute)
- Sample gas flow	30 ... 90 l/h (0.5 … 1.5 l/min)
• Test gas skid	
- Sample gas pressure	55 000 hPa (absolute)
- Sample gas flow	30 … 90 l/h (0.5 … 1.5 l/min)
Power supply	
• Supply 1	200 ... 240 V AC, 47 ... 63 Hz
• Supply 2	100 ... 120 V AC, 47 ... 63 Hz
• Supply 3	24 V DC for switch amplifiers
Type of connections	
Pipe material	Stainless steel
Connections/components	• Metric (6 mm) • Imperial (¼")
Cabling	
Electrical design	According to IEC
Type of cables	Non-armored cables
Cable ID	No single core labeling
Installation	
Site	Interior
Ex-zone analyzer	ATEX II, 3G
System design	
Version	Cabinet
Degree of protection	IP54
Automatic calibration	No
Signal outputs	4 ... 20 mA/isolated contact Max. 24 V AC/DC 1 A
With sample gas return flow	On request

Measuring response (relating to sample gas pressure 1 013 hPa absolute, 0.5 l/min sample gas flow and 25 °C ambient temperature)	
Output signal fluctuation	< ± 0.75% of the smallest possible measuring range according to rating plate, with electronic damping constant of 1 s (σ = 0.25%)
Zero point drift	< 1%/week of the smallest possible span according to rating plate
Measured-value drift	< 0.5%/of the smallest possible span according to rating plate
Repeatability	< 1% of the current measuring range
Detection limit	1 % of the current measuring range
Linearity error	< ± 1 % of the current measuring range
Influencing variable (relating to sample gas pressure 1 013 hPa absolute, 0.5 l/min sample gas flow and 25 °C ambient temperature)	
Ambient temperature	< 1%/10 K referred to smallest possible span according to label
Accompanying gases	Deviation from zero point
Sample gas flow	< 0.1% of the smallest possible span according to rating plate with a change in flow of 0.1 l/h within the permissible flow range
Sample gas pressure	< 1 % of the current measuring range with a pressure change of 100 hPa
Power supply	< 0.1 % of the current measuring range with rated voltage ± 10 %

Generator gas analyzer

Analysis	**Measuring point designation**			**Generator gas analyzer**			
	Concentration			**Unit**	**Measured component**	**Measuring range**	
Component	**Min.**	**Typical**	**Max.**			**Small**	**Large**
Ar/CO_2 in air	0		100	vol. %	Yes	0	100
H_2 in Ar/CO_2	0		100	vol. %	Yes	0	100
H_2 in air	80		100	vol. %	Yes	80	100
Sample temperature		50		°C			
Dust content		0		mg/m^3			
H_2O dew point		-50		°C			
Aggregate state, sample[1)]	Gaseous						

1) Standard state at 20 °C, 101.3 kPa

© Siemens AG 2014

Set GGA

Selection and ordering data	Article No.	
Set GGA ↗	**7MB1950-** ■■■0■-■■■■	Cannot be combined
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Gas connections		
6 mm pipe	0	
1/4" pipe	1	
Version		
H_2 monitoring (turbo generators)	G A	
Add-on electronics		
Without	0	
Auxiliary power		
100 ... 120 V AC, 47 ... 63 Hz	0	
200 ... 240 V AC, 47 ... 63 Hz	1	
Variants		
Set GGA, cable glands M20x1.5 power supply with cable diameter of 6 ... 12 mm (e.g. in accordance with EMT674-057, EMT674-059)	A	
Set GGA, with test gas skid, cable glands M20x1.5 power supply with cable diameter of 6 ... 12 mm (sampling unit on stainless steel plate), delivery batch in 2 parts	B	
Set GGA, cable glands M25x1.5 power supply with cable diameter of 14 ... 18 mm (e.g. in accordance with EMT674-070, EMT674-071)	C	
Set GGA, with test gas skid factory-assembled on mounting frame, cable glands M20x1.5 power supply with test gas skid (PA on stainless steel plate), ready mounted on frame, delivery batch 1 part	E	
Explosion protection		
Certificate: ATEX II 3G, flammable and non-flammable gases	B	
Documentation		
German	0	
English	1	
French	2	
Spanish	3	

© Siemens AG 2014

Dimensional drawings

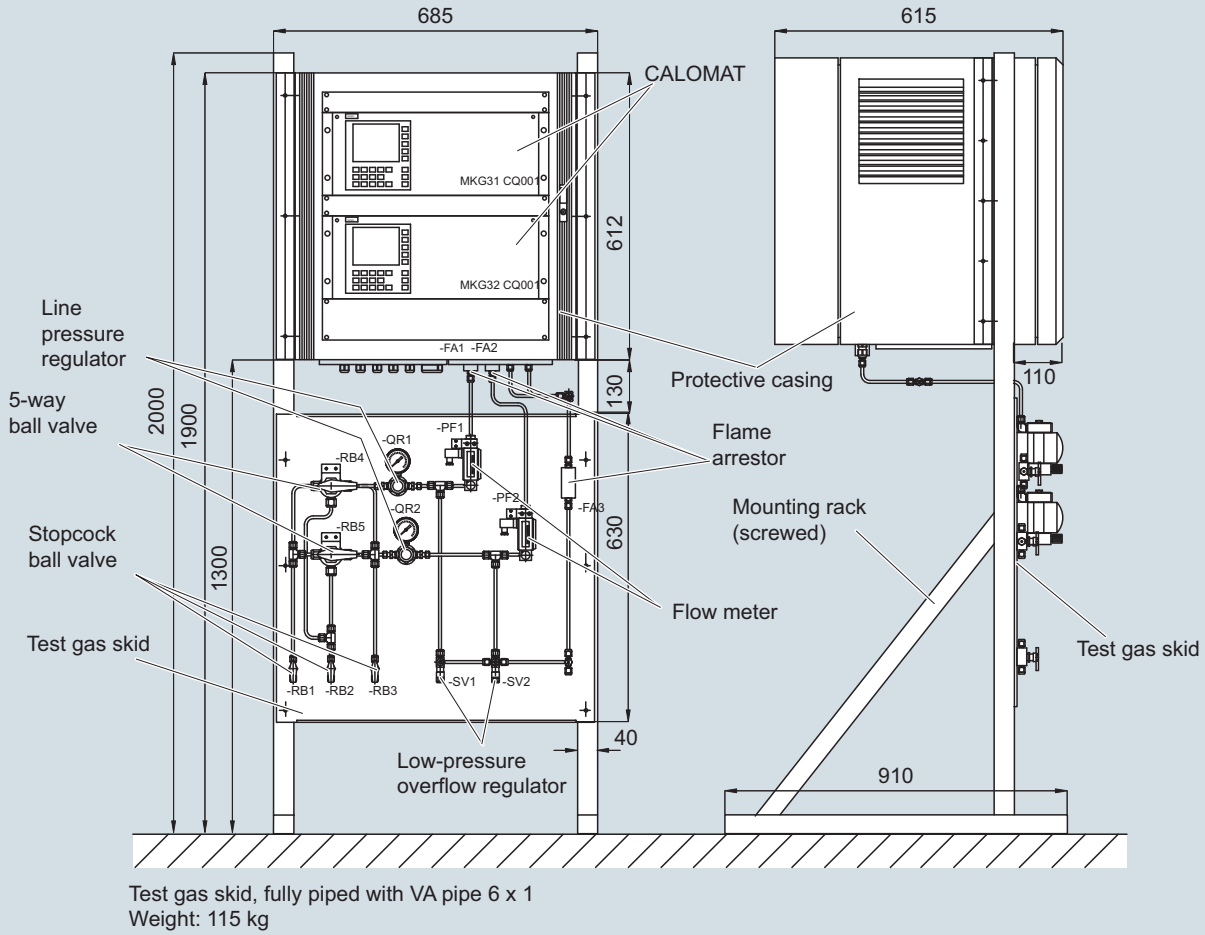

Test gas skid, fully piped with VA pipe 6 x 1
Weight: 115 kg

Set GGA, dimensions in mm, figure corresponds to 7MB1950-0GA00-1EB0

© Siemens AG 2014

Overview

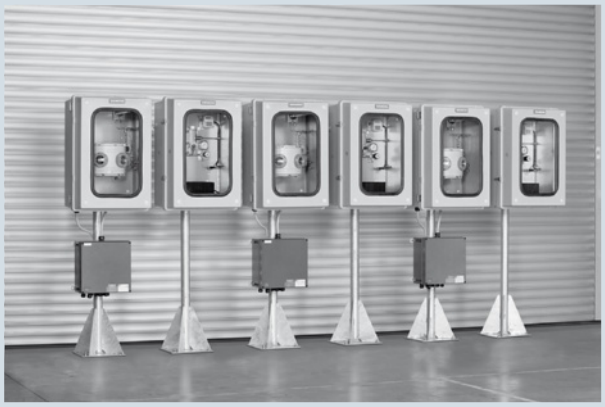

The Set CV (Calorific Value) is a standardized system for determining the quality of natural gas with SITRANS CV and MicroSAM.

Benefits

Standardized complete system

- Easily and quickly configured, from sampling to the gas supply
- Field-proven, harmonized and reliable set
- Suitable for determining the natural gas quality with high accuracy

Field-proven, reliable technologies

- Version with German Federal Testing Authority certification (without mass memory, without DSfG) available for fiscal metering
- GC MEMS technology with low consumption levels, high linearity/accuracy over the entire measuring range, and short cycle times

Easy installation

- Installation in EEx Zone 1 possible
- Compact and rugged design for erecting indoors and outdoors
- Minimum space requirements

Application

For the chromatography industry, the natural gas market is one of the fastest growing in the world. There are a variety of reasons for this. While global energy requirements are increasing, there is a parallel trend of fossil fuel reserves being depleted. Natural gas is one type of fossil fuel that can still be found in vast, untapped reserves. In addition to this, the market is becoming increasingly liberalized, and the number of participants has risen considerably as a result - from the production stage, across the entire distribution network, right through to the end customer. In turn, this has generated more transfer points at which the quality and quantity of natural gas need to be determined for accounting purposes.

The market requires a reliable complete system which is specially designed for natural gas. With the Set CV, Siemens offers a system that covers all the requirements of such applications, from sampling to pressure reduction, sample preparation and determination of quality, supplying carrier and calibration gases, right through to expansion of the communication interfaces.

The set offers various modules to cover market requirements. Using the different versions, the set can be adapted, and the modules can be freely-combined.

Such a system can be used wherever the quality of natural gas has to be determined. For example, during the conditioning of natural gas and feeding into the pipeline network, during transportation and distribution in the network, and when extracting it for supply purposes.

Design

Standardization of systems means good clarity and simple facilities for configuration. Different versions mean that it is possible to appropriately adapt the system to the requirements. The modules can be combined as desired. Standardization also means that not all imaginable versions are included, and that special requirements such as armored cables, customer-specific documentation, specific conductor labeling, or certificates such as CE or 31B cannot be implemented at all, or not without an extra charge.

The design is divided into the following standard modules: sampling, pressure reduction, sample preparation system, SITRANS CV, gas supply, calibration gases.

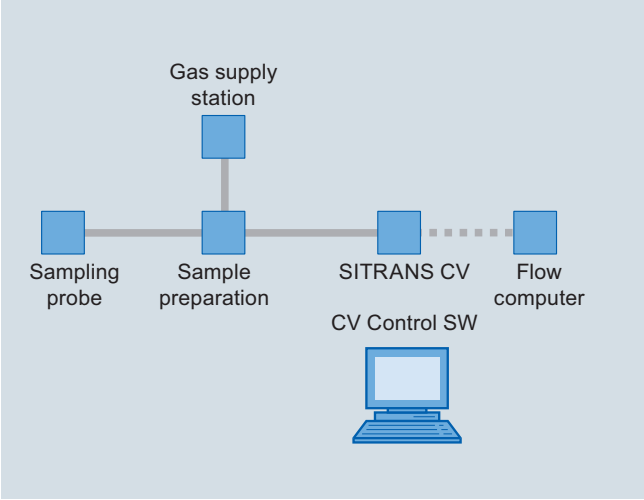

General information

The set can be dimensioned for a 230 V AC or 115 V AC power supply. It is not possible to switch between supplies.

The gas connections can be supplied with either metric or imperial dimensions.

On the metric line, the gas connections are in the form of metric clamping ring glands with a diameter of 3 mm. The imperial line contains gas connections in the form of imperial clamping ring glands with a diameter of 1/8 inch. The pipes between the sampling probe, pressure reduction, sample preparation device, and SITRANS CV are optionally available. The system is generally designed for temperatures between -20 and +55 °C in areas with a risk of explosions. When provided with heating, the system can also be used down to -30 °C. The natural gas to be measured should be in a stable gaseous form, dry and clean.

Sampling probe

The basic components of a sampling probe are a lance, process connection, process isolation and, if necessary, pressure reduction. The high-pressure version is not supplied pre-assembled.

Lance

A representative sample should be taken from the central third of the pipeline. With a lance length of 1 m it is therefore possible to extract a sample from a pipeline with a diameter of up to 1 600 mm. In addition, two versions with different types of lance diameter are available. On the one hand, a pipe whose outer diameter is 6 mm and inner diameter is 2 mm. And on the other, a pipe whose outer diameter is 12 mm and inner diameter is 8 mm. The lance can be supplied in a permanently installed or removable state (not for 12 mm).

© Siemens AG 2014

Process connection

There are four versions for the flange connection to the pipeline. Flange DN 65 PN16 Form C for pressures up to 1 600 kPa, flange ANSI 2" for pressures up to 300 lbs RF as well as flange DN 65 PN160 Form E for pressures up to 16 000 kPa and flange ANSI 2" for pressures up to 2 500 lbs RF.

Process isolation

It may be necessary to isolate the natural gas line from the system for maintenance and repair work. To do this, you can select either a simple stopcock or a double block and bleed structure. While the stopcock is a cost-effective solution for minimum requirements, the double block and bleed structure stands for enhanced safety, as it has two valves that prevent any gas from being transferred further.

High-pressure reduction on the primary side

Pressure can be reduced in three ways: directly at the probe (primary side), in an external casing with a pressure reduction unit (primary side), or in the sample preparation system (secondary side).

If the sample preparation system and the natural gas chromatograph are installed directly next to the sampling point, the high-pressure reduction can be implemented in the sample preparation system. The pressure should always be reduced as close to the sampling point as possible in order to keep the dead volume as small as possible. The permissible sample and calibration gas pressure is 10 to 60 kPa above atmospheric pressure. Notice: Sample must not contain ethine!

The incoming carrier gas pressure must range from 500 to 700 kPa (g). 600 kPa (g) is recommended. Important: A continuous carrier gas supply is required for error-free operation (frequent carrier gas failure has a negative effect on the durability of the detectors and the device-internal pressure settings). In addition, an external two-step pressure regulator for the carrier gas pressure is strongly recommended.

Heated and unheated pressure reduction units are available in the external casing for high-pressure reduction on the primary side. Pressure reduction in the external casing is suitable for combination with the permanently installed and retractable standard probe. The heated pressure regulators have a power consumption of 150 W, and reliably maintain the sample in a gaseous state.

Special probe with high-pressure reduction

A third option offers an alternative to the two standard probes: a permanently installed probe with integrated separation of aerosols (so-called BTU diaphragm) in the pipeline and a pressure reduction unit. The lance is integrated in this at a depth of 228 mm. The protection pipe has an outer diameter of 22.8 mm. The lance and pressure reduction do not need to be separately defined.

Heated pipeline

To ensure that the sample is maintained in a gaseous state, it is recommendable to use a heated sample gas line – for example, between the sampling point and the sample preparation system. The pipeline is encased in a PE corrugated hose with an outer diameter of 43 mm. The self-regulating maintenance temperature remains at approximately 80 °C. The electrical connection is in the terminal box.

The power consumption is approx. 38 W/m.

Pipe base for enclosure attachment

A hot-dip galvanized 2" pipe base, 1 700 mm high, with mounting brackets and joining sheet enables free-standing mounting of the protective casing.

Sample preparation

The permissible sample and calibration gas pressure is 10 to 60 kPa above atmospheric pressure. Notice: Sample must not contain ethine!

The incoming carrier gas pressure must range from 500 to 700 kPa (g). 600 kPa (g) is recommended. Important: A continuous carrier gas supply is required for error-free operation (frequent carrier gas failure has a negative effect on the durability of the detectors and the device-internal pressure settings). In addition, an external two-step pressure regulator for the carrier gas pressure is strongly recommended.

The basic configuration of the sample preparation system for a stream includes a stopcock, 0.5 µm filter, flowmeter for the fast loop, pressure-relief valve, 3/2-way solenoid valve with sealed cable for automatic switching between calibration gas and sample gas, and a terminal box for connecting the solenoid valve. This solenoid valve must either be protected by the customer at 0.5 A, or a ready-assembled terminal box with power supply and fuses can be ordered from the list of supplementary items.

There are also a number of other options for modifying the basic configuration.

Secondary pressure adjustment

The pressure adjustment unit with unheated pressure regulators can be ordered for one, two and three sample flows. This type of structure meets the minimum secondary pressure adjustment requirements. Please note that a reduction in pressure cools the sample down considerably, which can cause moisture to condense if the dew point is fallen below.

Another alternative, however, is pressure adjustment with a heated pressure regulator (150 W) for one, two or three sample streams. Heating the sample ensures that it remains in a gaseous state. The Joule-Thomson effect is thus compensated. The regulators can reduce pressures from 16 to 100/170 kPa.

If the pressure is to be reduced directly at the sampling probe or in an external casing outside the sample preparation system, no further pressure reduction is required during sample preparation.

© Siemens AG 2014

Sample injection

Where sample injection is concerned, straightforward and safety versions are available for between one and three streams.

Considered simply, sample injection is carried out for one, two or three streams using one solenoid valve per sample stream (cascade connection). Its job is to block any gas flows that are not required without preventing the desired gas from flowing. A 0.5 A fuse is required per solenoid valve and flowmeter. These are available in the ready-assembled terminal box.

The safety version of the sample injection system for one, two or three streams with double block and bleed technology enables the sample to be switched over, which in turn allows clean separation between gas streams by partially closing and venting the line. Since two valves are used to prevent the flow of gas that is not to be measured, rather than just one, the functional safety of the system remains at an optimum level for a long time. In addition, 0.5 A fuses are required for the sample valves and calibration valve. These are included in the electrical connection (supplementary item).

Monitoring the sample gas monitoring chromatograph (GC)

The sample flow to the GC can also be monitored electronically as an option. An alarm signal is output when necessary. A switch disconnector for the power supply is also required; this can be ordered along with the ready-assembled terminal box.

Protective casing/mounting plate for sample preparation system

The sample preparation system is available mounted either on a plate, in the protective casing, or in the heated protective casing.

The stainless steel mounting plate, measuring 682 x 482 x 3 mm (H x W x D), is suitable for wall mounting. The system components selected are mounted on the plate and supplied with all pipes and wires installed.

The unheated protective transmitter box, made from fiber glass-reinforced plastic and suitable for wall mounting measures 800 x 600 x 480 mm (H x W x D) and is fitted with stainless steel hinges, quick-release locks, safety glass windows and a stainless steel mounting plate.

The system components selected are mounted and supplied with all pipes and wires installed in the protective casing.

It is also possible to provide a heater in the protective transmitter box which can be controlled between 10 and 40 °C in steps of 5 degrees. The system components selected are mounted and supplied with all pipes and wires installed in the protective casing. The heating has a power of 400 W.

Aerosol filter/glycol filter

These filters have the task of removing any impurities that may have been introduced into the natural gases by aerosols or glycols, thus providing an additional level of safety for the SITRANS CV and, therefore, the system functionality. The aerosol filter is supplied with 5 replacement diaphragms and the glycol filter with 10 replacement cartridges.

Manual laboratory sampling

An additional control valve permits manual laboratory sampling as an option. When not in use, it is fitted with a blanking plug on the output end.

Pipe base for enclosure attachment

A hot-dip galvanized 2" pipe base, 1 700 mm high, with mounting brackets and joining sheet enables free-standing mounting of the protective casing or the mounting plate as an alternative to wall mounting.

Protective top cover

Another option is a protective top cover made from fiber glass-reinforced plastic and supplied with mounting brackets, for protection against solar radiation and storms. It must be mounted to a pipe base.

Heated sample gas line

To prevent condensation of the sample, it may be necessary to use a heated prepared pipeline – for example, between the sample preparation device and SITRANS CV/MicroSAM. The pipeline is encased in a PE corrugated hose with an outer diameter of 43 mm. The self-regulating maintenance temperature is around 80 °C.

Example of single-stream sample preparation system: may deviate from the supplied system

SITRANS CV/MicroSAM

The core component of the Set CV is the GC SITRANS CV/MicroSAM (for more detailed information see catalog PA 01, section 3).

SITRANS CV/MicroSAM system components

Protective casing/plate for SITRANS CV/MicroSAM

The SITRANS CV/MicroSAM is available mounted either on a plate, in the protective casing, or in the heated protective casing.

The stainless steel mounting plate, measuring 682 x 482 x 3 mm (H x W x D), is suitable for wall mounting.

The unheated protective transmitter box, made from fiber glass-reinforced plastic and suitable for wall mounting measures 800 x 600 x 480 mm (H x W x D) and is fitted with stainless steel hinges, quick-release locks, safety glass windows and a stainless steel mounting plate.

The protective casing can also be supplied with heating as an option. The heating can be adjusted between 10 and 40 °C, in increments of 5. The system components selected are mounted and supplied with all pipes and wires installed in the protective casing. The heating has a power of 400 W.

© Siemens AG 2014

Terminal box

There are five connection options in total to choose from:

The simplest option is the interface in accordance with SITRANS CV/MicroSAM (open cable end).

The terminal box with the dimension of 340 x 170 x 91 mm (H x W x D) is made from polyester resin. The scope of delivery includes terminals, isolating terminals, cable glands and a PE rail. If ordered with the pipe base add-on part, the terminal box is supplied attached to the base, and the scope of supply includes 2.5 mm^2 terminals for connection by the customer and M16/M20 cable glands. The power supply is 24 V DC. The terminal box is not suitable for connecting a heater, flow meter with limit value transmitter, and Double Block and Bleed (DB&B).

The terminal box with the dimension of 360 x 360 x 190 mm (H x W x D) is made from painted sheet steel. The scope of delivery includes switch amplifiers, terminals, and cable glands. If ordered with the pipe base add-on part, the terminal box is supplied attached to the base, and the scope of supply includes 2.5 mm^2 terminals for connection by the customer and M16/M20 cable glands. The power supply is 24 V DC. The terminal box is not suitable for connecting a heater and DB&B.

The terminal box, including switch amplifier and a power supply (115 V AC or 230 V AC, not switchable), with the dimension of 360 x 360 x 190 mm (H x W x D), is made from painted sheet steel. The scope of delivery includes terminals, 0.5 A fuses, terminals, cable glands and a PE rail. If ordered with the pipe base add-on part, the terminal box is supplied attached to the base, and the scope of supply includes 2.5 mm^2 terminals for connection by the customer and M16/M20 cable glands. The terminal box is not suitable for using DB&B.

The terminal box, including switch amplifiers and a power supply (115 V AC or 230 V AC, not switchable), with the dimension of 360 x 360 x 190 mm (H x W x D), is made from painted sheet steel. The scope of delivery includes isolating terminals, 0.5 A fuses, terminals, cable glands, relays and a PE rail. If ordered with the pipe base add-on part, the terminal box is supplied attached to the base, and the scope of supply includes 2.5 mm^2 terminals for connection by the customer and M16/M20 cable glands.

Gas supply

A gas chromatograph requires calibration and carrier gases. Therefore the set offers various options with regard to gas connection, gas cylinder design, and calibration gases. Either individual components or complete systems can be ordered.

Cylinder pressure reducer, separate

The cylinder pressure reducer for calibration gases is supplied separately. It is made from stainless steel and has a cylinder connection conforming to DIN 477 No. 14 (calibration gas). The cylinder pressure reducer is also fitted with a gauge for primary and back pressure.

Contact gauge for supply gases

Two gauges with a 50 mm diameter and mounted on the battery pressure reduction station can also be ordered. The intrinsically-safe slot initiators in accordance with NAMUR must be operated via a switch amplifier. This is not included in the delivery. The line is in the terminal box on the station panel.

Heated line

A heated prepared line is available for heating the calibration gas line from the cylinder cabinet to the sample preparation device. The power consumption is 38 W/m with an outer diameter of 43 mm on the corrugated hose. The integrated heating system is self-regulating with a maintenance temperature of approximately 80 °C.

Automatic cylinder changeover switch with separate coils

The stainless steel automatic cylinder changeover switch, supplied on a mounting plate, is designed for back pressures of between 50 and 1 000 kPa and contains two coiled pipes for helium that conform to DIN 477. The maximum permissible cylinder pressure is 20 000 kPa. This version also includes a gauge for measuring primary and back pressure. A contact gauge cannot be fitted when supplied separately.

Simple supply unit

This simple supply unit consists of a hot-dip galvanized 2-inch pipe base, 2 200 mm high, with a fiber glass-reinforced plastic protective top cover as well as two cylinder holders and a cylinder changeover switch. The gas cylinders are not included in the basic scope of supply.

Painted sheet steel gas cylinder cabinet

This version is supplied with the automatic cylinder changeover switch and coils, as well as the stainless steel calibration gas cylinder pressure reducer in a sheet metal cabinet.

The gas cylinder cabinet has room for two 50 l cylinders and one 10 l calibration gas cylinder. The dimensions are 2 050 x 1 250 x 400 mm (H x W x D). It contains the cylinder station, a stopcock for carrier gas, cylinder holder and pipe coils for the gas cylinders. The cabinet pipes are fully installed and the cabinet is equipped with bulkhead fittings for carrier gas, calibration gas and exhaust gas from the pressure relief valves.

As an option, this gas cylinder cabinet can also be supplied with heating from a heating sleeve for a 10 l calibration gas cylinder at 20 °C retaining temperature. The cylinder head is heated separately, in a fiber glass-reinforced plastic enclosure. The cylinder pressure reducer is also located here. The heating sleeve prevents condensation from building up in the gas cylinder. To ensure seamless gas heating, a heated line for accepting the calibration gas is recommended.

© Siemens AG 2014

Calibration gases

Six different calibration gases are available as standard.

Component groups	C6+ with O_2	C6+ without O_2	C6+ without O_2	C7+ without O_2	C6, C7, C8, C9 without O_2	Biomethane with H_2
Special feature		Certified in acc. with PTB-A 7.63				
	(mol %)	(mol %)	(mol %)	(mol %)	(mol %)	(mol %)
Hydrogen						0.20
Nitrogen	4.00	4.00	4.00	4.00	4.00	4.00
Carbon monoxide						
Carbon dioxide	1.50	1.50	1.50	1.50	1.50	2.50
Oxygen	0.50					0.40
Methane	88.40	88.90	88.90	88.80	88.86	88.40
Ethane	4.00	4.00	4.00	4.00	4.00	2.50
Ethene						
Propane	1.00	1.00	1.00	1.00	1.00	1.00
Isobutane	0.20	0.20	0.20	0.20	0.20	0.50
n-butane	0.20	0.20	0.20	0.20	0.20	0.50
Neopentane	0.05	0.05	0.05	0.1	0.1	
Isopentane	0.05	0.05	0.05	0.05	0.05	
n-pentane	0.05	0.05	0.05	0.05	0.05	
n-hexane	0.05	0.05	0.05	0.05	0.01	
n-heptane				0.05	0.01	
n-octane					0.01	
n-nonane					0.01	

Function

It is the job of the sampling probes to take a representative sample from the pipeline. It is important to ensure that this sample is extracted from the central third of the pipeline. One advantage of the retractable probes is that there is no risk of damage being caused to them when pigging is taking place in the pipeline. There is also the option of reducing pressure directly at the sampling probe. This is especially advisable if sample preparation and gas analysis are not carried out directly next to the sampling point.

As a general rule, implementing a reduction in pressure reduces the sample pressure to between 10 kPa and 500 kPa. Heated pressure regulators must be used if the dew point could be fallen below in the process.

In the sample preparation system, pressure reducers and flowmeters can be used to set the sample flow and pressure that will ultimately be required. Electronic monitoring of the sample flow transmits an alarm signal to the SITRANS CV/MicroSAM if necessary. The filters ensure that the sample is appropriately clean. An optional double block and bleed (DB&B) arrangement of the solenoid valves can ensure extremely safe isolation between the sample streams and the calibration gas. All versions of the sample preparation system are available for one, two or three flows plus the calibration flow.

The prepared sample is then analyzed in the natural gas analyzer and the calorific value, standard density and Wobbe index are calculated. Connecting the SITRANS CV/MicroSAM to a flow computer enables an energy value to be calculated from the measured quality and quantity with consideration of the pressure, temperature and flow measurement. SITRANS CV is preferably used in connection with flow computers. For the use of MicroSAM, please consult the parent company.

In order to regularly carry out calibration and supply carrier gas to the SITRANS CV/MicroSAM, gases that are typically found in shelving or cabinet structures must be made available. Heating the gas cylinders prevents condensation from building up in them. The gas cylinder transfer station enables the cylinders to be exchanged during operation. Individual cylinders can be connected and disconnected by means of valves.

The communication functionalities of the SITRANS CV can be extended using a SIMATIC Extension Unit. It is then possible to connect a further Modbus master and/or up to 16 AO. For the generation of analog outputs in combination with MicroSAM, we recommend the I/O Extender solution (see catalog PA 01, section 3)

© Siemens AG 2014

Technical specifications

General information	
Ambient temperature	-30 ... 55 °C (with heating)
Explosion protection	ATEX Category II 2G, T3
Supply voltage	230 V AC, 115 V AC or 24 V DC
Max. permissible pressure at input of high-pressure reduction	16 000 kPa
Max. permissible pressure at input of sample preparation system with pressure regulator	16 000 kPa
Max. permissible pressure at output of sample preparation system	10 ... 60 kPa above atmospheric pressure Notice: Sample must not contain ethine!
Sampling	
Lance	Outer diameter 6 mm and inner diameter 2 mm or outer diameter 12 mm and inner diameter 8 mm Length 1 000 mm8
Special probe with BTU diaphragm and pressure reduction, non-retractable	Immersion depth approx. 380 mm Protection pipe outer diameter 25.4 mm
Process connection	At flange DN65 PN16 Form C, max. 1 600 kPa gas pressure At flange DN65 PN160 Form E, max. 16 000 kPa gas pressure At flange ANSI, 2-inch, 300 lbs RF At flange ANSI, 2-inch, 2 500 lbs RF
High-pressure reduction in casing with pressure regulators, optional heating	Casing with dimensions 385 x 485 x 380 mm Primary pressure 16 000 kPa, output pressure 100/170 kPa (power consumption 150 W)
Pipe base	2-inch pipe base for free-standing transmitter box, 1 700 mm high
Heated line	Heating power is 38 W per meter Self-regulating heating up to approx. 80 °C Outer material is PE corrugated hose with 43 mm outer diameter
Sample preparation for 1 to 3 sample gas flow, plus calibration gas flow	
Basic configuration	0.5 µm filter, 3/2-way solenoid valve, flowmeter, overflow valve and stopcock
Pressure regulator, optional heating	Primary pressure 16 000 kPa, output pressure 100/170 kPa (power consumption 150 W)
Simple sample injection	One 3/2-way solenoid valve per sample gas stream
DB&B sample injection	Two 3/2-way solenoid valves per sample gas flow
On mounting plate	652 x 422 x 3 mm
In protective casing	750 x 520 x 430 mm
Protective casing heating	Power consumption 300 W Adjustable between 10 and 40 °C, in increments of 5
Pipe base	2-inch pipe base, 1 700 mm high
Additional filters	Aerosol, glycol

System components	
On mounting plate	682 x 482 x 3 mm
In protective casing	800 x 600 x 480 mm
Protective casing heating	Power consumption 400 W Adjustable between 10 and 40 °C, in increments of 5.
Terminal box	340 x 170 x 91 mm
Pipe base	2-inch pipe base, 1700 mm high
Heated line	Heating power is 38 W per meter Self-regulating heating up to approximately 80 °C Outer material is PE corrugated hose with 43 mm outer diameter
Gas supply	
Transfer station	Max. cylinder pressure 20 000 kPa Output pressure 50 ... 1 000 kPa
Pipe base	2-inch pipe base, mounted Height 2 200 mm
Gas cylinder cabinet	Gas cylinder cabinet for two 50 l carrier gas cylinders and one 10 l calibration gas cylinder. Dimensions are 1 250 x 400 x 2 050 mm
Cylinder heating	The cylinder heating system is dimensioned for 10 l calibration gas cylinders and ensures that no condensation occurs within the gas cylinder.
Cylinder pressure reducer	Cylinder pressure reducer for reducing primary pressure of max. 30 000 kPa to back pressure 0 … 400 kPa
Heated line	Heating power is 38 W per meter Self-regulating heating up to approximately 80 °C Outer material is PE corrugated hose with 43 mm outer diameter
Calibration gas	
Gas mixture 1 ... 6	The gas mixture is stable for 36 months.

© Siemens AG 2014

Set CV

Selection and ordering data	Article No.	
CV set, probe (supplied separately) and high-pressure reduction ↗	**7KQ2150-** ■■■■■ - ■■■	Cannot be combined
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Explosion-proof version, in accordance with ATEX	**0**	
Supply voltage		
Without	**A**	**A A A → B03,**
230 V AC	**B**	**C03**
115 V AC	**C**	
Pneumatic connections		
Metric	**A**	
Imperial	**B**	
Lance (length always 1 m)		
Without	**0**	
OD/ID 6 mm/2 mm	**1**	
OD/ID 12 mm/8 mm	**2**	
Process connection		
Without	**0**	
Flange DN 65 PN16 Form C	**1**	
Flange DN 65 PN160 Form E	**2**	
Flange ANSI, 2", 300 lbs RF	**3**	
Flange ANSI, 2", 2 500 lbs RF	**4**	
Analysis isolation		
Without	**0**	
Stopcock	**1**	
DB&B	**2**	**2**
Probe installation		
Without	**A**	
Standard (without pressure reduction)	**B**	
Removable (without pressure reduction)	**C**	
Special installation (with pressure reduction)	**D**	
High pressure reduction		
Without	**A**	
Separate high-pressure reduction box with mech. pressure regulators	**B**	
Separate high-pressure reduction box with evaporation pressure regulator	**C**	**C**
Additional versions	**Order code**	
Add "-Z" to Article No. and specify Order code		
Base for high-pressure reduction device	**B01**	
Protective top cover GRP	**B02**	
Preparation of heated line	**B03**	
Heated line from the high-pressure reduction box to the sample preparation device (C03 + C03 = 2 m)	**C03**	
Separate stainless steel pipe 3 x 0.5 mm in 5 m intervals for connection to the sample preparation device (example: C04 + C04 = 10 m)	**C04**	

© Siemens AG 2014

Selection and ordering data	Article No.	
Sample preparation device, basic configuration ↗	**7KQ2151-** ■■■■■ - ■■	Cannot be combined
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Explosion-proof version, in accordance with ATEX	0	
Supply voltage		
Without	A	A A A
230 V AC	B	
115 V AC	C	
Pneumatic connections		
Metric	A	
Imperial	B	
Pressure adjustment		
Without	0	
Pressure regulator unheated for 1 sample flow	1	
Pressure regulator unheated for 2 sample flows	2	
Pressure regulator unheated for 3 sample flows	3	
Pressure regulator heated for 1 sample flow	4	4
Pressure regulator heated for 2 sample flows	5	5
Pressure regulator heated for 3 sample flows	6	6
Sample gas pump (Ex) für 1 sample flow	7	
Sample injection		
Without	0	
Standard for 1 sample flow (automatic)	1	
Standard for 2 sample flows (automatic)	2	
Standard for 3 sample flows (automatic)	3	
For 1 sample flow in DB&B technology (automatic)	4	4
For 2 sample flows in DB&B technology (automatic)	5	5
For 3 sample flows in DB&B technology (automatic)	6	6
Monitoring the sample gas flow to the gas chromatograph		
Visual, mechanical monitoring	0	
With electrical monitoring	1	
Plate/enclosure		
Without	A	
Mounting plate for wall mounting	B	
GRP protective casing (unheated) for wall mounting	C	
GRP protective casing (heated) for wall mounting	D	D
GRP protective casing (unheated) mounted on base	E	
GRP protective casing (heated) mounted on base	F	F
Mounting plate mounted on base	G	
Additional versions	**Order code**	
Add "-Z" to Article No. and specify Order code		
Aerosol filter per sample flow with 5 replacement diaphragms	**A01**	
Glycol filter per sample flow with 10 replacement cartridges	**A02**	
Manual lab sampling per sample flow	**A03**	
Connection of second calibration gas through solenoid valve	**A04**	
Protective top cover GRP	**B01**	
Replacement filter element for sample flow filter (5 units)	**E01**	

© Siemens AG 2014

Set CV

Selection and ordering data	Article No.	
System components	**7KQ2152-** ■■■■■	Cannot be combined
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Explosion-proof version, in accordance with ATEX	**0**	
Supply voltage		
230 V AC	**A**	
115 V AC	**B**	
24 V DC	**C**	**C C C** → **B03, C01**
Pneumatic connections		
Metric	**A**	
Imperial	**B**	
Plate/enclosure SITRANS CV		
Without	**0**	
On plate, with stopcock and connection pieces	**1**	
In the GRP protective casing, unheated	**2**	
In the GRP protective casing, heated	**3**	**3**
Electrical connection		
Interface in accordance with technical data of SITRANS CV (free cable end)	**0**	
Ex terminal box with standard terminals; 24 V DC connection	**1**	
Ex terminal box with electrical sample gas monitoring; 24 V DC connection	**2**	
Ex terminal box with electrical sample gas monitoring and standard sample injection; 115/230 V AC connection	**3**	**3**
Ex terminal box with electrical sample gas monitoring and DB&B sample injection; 115/230 V AC connection	**4**	**4**
Additional versions	**Order code**	
Add "-Z" to Article No. and specify Order code		
Pipe bases for securing the enclosure without mounting plate/box	**B01**	
Protective top cover GRP	**B02**	
Preparation of heated line	**B03**	
Heated line for sample preparation device/SITRANS CV (C01 + C01 = 2 m)	**C01**	
Installation kit (pipe/glands/cable) for connecting to the sample preparation device	**C02**	
Separate stainless steel pipe 3.0 x 0.5 mm or 3.18 x 0.56 mm (continuous) at 5 m intervals (example: C03 + C03 + C03 = 15 m)	**C03**	

© Siemens AG 2014

Selection and ordering data	Article No.	
Gas supply	**7KQ2153-** ■■■■■	Cannot be combined
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Explosion-proof version, in accordance with ATEX	0	
Supply voltage		
Without	A	A → C01
230 V AC	B	
115 V AC	C	
Pneumatic connections		
Metric	A	
Imperial	B	
Automatic transfer station (stainless steel) with coils		
Without	0	
Installed on the mounting panel	1	
Installed on the base	2	
Installed in the metal cabinet	3	
Installed in the metal cabinet with calibration gas cylinder heating	4	
Cylinder pressure reducer for calibration gas		
Without	0	
Separate	1	
Installed (base/metal cabinet)	2	
Additional versions	**Order code**	
Add "-Z" to Article No. and specify Order code		
2 contact pressure gauges for transfer station	**A01**	
Preparation of heated line	**B03**	
Heated line for calibration gas from the cylinder cabinet to the sample preparation device (only with 115 V/230 V); length per meter (C01+C01 = 2 m)	**C01**	
Separate stainless steel pipe 3.0 x 0.5 mm or 3.18 x 0.56 mm (continuous) at 5 m intervals (example: C02+C02+C02=15 m)	**C02**	

Selection and ordering data	Article No.	
Calibration gas for SITRANS CV	**7KQ2158- 0 A ■ 0 0**	
Calibration gas in 10 liter cylinder		
Mixture 1	B	
Mixture 2	C	
Mixture 3	D	
Mixture 4	E	
Mixture 5	F	
Mixture 6	G	

© Siemens AG 2014

Set ASM

Overview

The ASM is a PC-based HMI system for monitoring, testing and administration of analyzers in subsystems or in the complete plant. The relevant information of the analyzers is collected over a uniform communications network and saved in a central database. By means of the PC's user-friendly operator interface it is possible to access measured-value trends, device statuses and statistical evaluations, among others, or to start test routines for validation of the results. A comprehensive reporting module is available to document the evaluations.

Benefits

- Monitoring, testing and administration of many different types of analyzers using one system
- Visualization and operation using a single-user system up to distributed multiuser systems with redundant servers
- Assessment of the measured-value reliability through checking of the analyzers using various validation routines, e.g. based on the industry standard ASTM D 3764
- Increase in analyzer online time through use of the line sample method
- Statistical evaluation of operating statuses and determination of key performance indicators (KPI) such as availability, error rate and maintenance frequency
- Reduction in maintenance costs through device-specific planning, implementation and checking of maintenance work
- Documentation of the performance of individual analyzers up to the complete plant using the reporting module. The reports can be saved in the ASM or exported for further use.

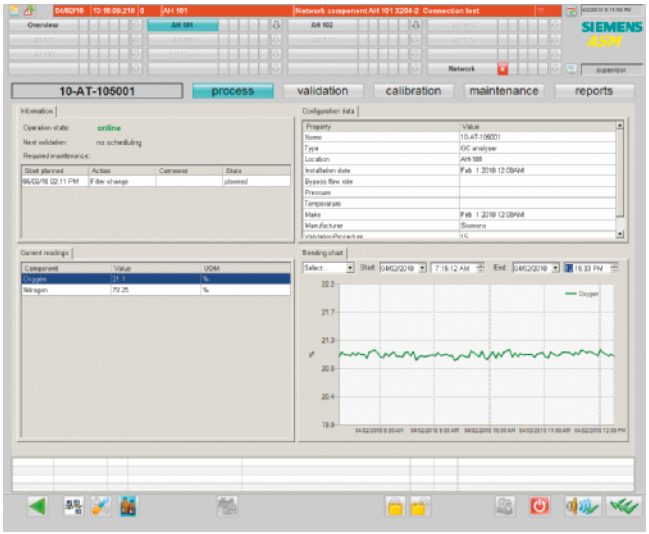

View of the process module

Application

The ASM is ideal for all systems and plants where high reliability of the measured values and documentation of the analyzer performances are required. Using the communications network, remote analyzers can also be monitored from a central workstation.

The ASM is particularly suitable for use in the oil & gas, petrochemical, and chemical industries, and can be applied in new plants or also in existing plants to optimize the analyzer landscape.

Design

System design

- PC-based HMI system
- Visualization and operation possible using a single-user system up to distributed multi-user systems with redundant servers
- Logging and archiving of process and system data in a central database
- Integration of different analyzers in a uniform communications network

System software

- Siemens SIMATIC WinCC for the HMI functions
- Microsoft SQL Server for archiving and data collection
- Microsoft Windows/ Windows Server as operating system

Communication

- An Ethernet network is the basis for communication
- Integration of analyzers using PROFINET, ModbusTCP or OPC data exchange
- Analyzes without a communication interface can be integrated by connecting the signals to Siemens SIMATIC components
- Data exchange with other systems possible using OPC

Networking

- Siemens Scalance Ethernet switches for design of electrical and optical Industrial Ethernet in line and star structures; design in ring structures is possible to increase the fail-safety of the network
- Integration of the ASM in an existing Ethernet network may be possible

© Siemens AG 2014

Function

General information

The information of the analyzers is collected over the communications network and saved in the central ASM database for further analysis. The ASM is accessed using a Windows workstation, and it is possible to navigate between overview displays, device-specific displays, and general functions.

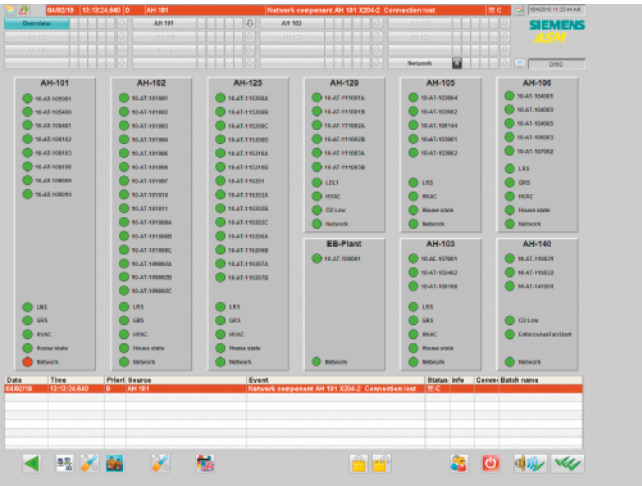

Overview of analyzers in a plant

The ASM has the following function modules for each analyzer for carrying out the HMI tasks:

Module	Task
Process	Provides a detailed overview of the selected analyzer. The current analyzer status, planned maintenance work, and configuration data are displayed. The current measured values are displayed in a table, historical values can be analyzed with the trend display using selectable time windows.
Validation	Checking the reliability of the measured values of analyzers using various routines and methods. This test can be started automatically at specific intervals or manually by the ASM.
Calibration	Carries out a calibration on the analyzer and monitors the results (this module is only available for analyzers which support remote calibration, e.g. Siemens Maxum Ed. II, Siemens MicroSAM, …).
Maintenance	Device-specific maintenance tasks can be specified here, their timing defined, and checked. Documentation such as maintenance procedures or manuals can be opened to support the maintenance work. The view of key performance indicators (KPI) provides a fast overview of the analyzer's performance such as availability, error rate and maintenance frequency
Reporting	This is a comprehensive function for producing customized reports. The module permits analysis of current and historical data in selectable time periods for documentation of the performance of individual analyzers up to the complete plant using the reporting module. The reports can be saved in the ASM or exported for further use.

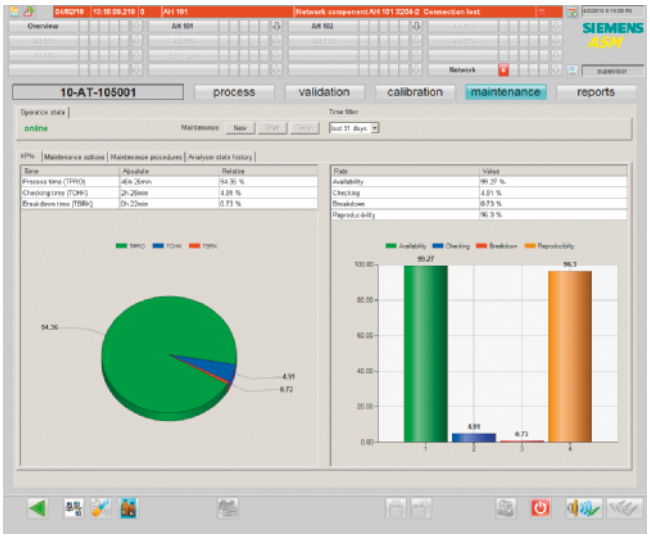

View of the maintenance module

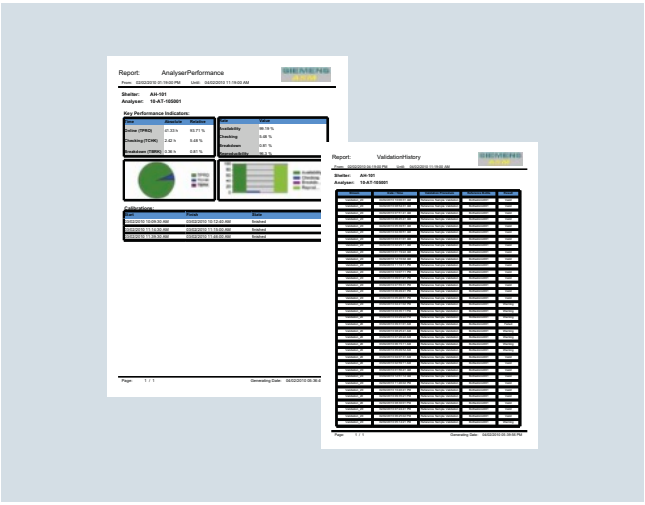

Examples of generated reports

© Siemens AG 2014

Set ASM

Further functions are:

Function	Task
SCADA	The ASM provides all typical SCADA functions such as: Password protection and different access privileges User administration Signaling, acknowledgment and archiving of alarms and events
Network screen	Status display of the network devices. This overview displays the statuses of the Ethernet switches (online/uncertain/fault). The analyzer alarms are integrated in the ASM signaling system.
Reference bottle management	Management and assignment of reference gas cylinders. This information serves as reference values for the validation using the reference sampling method.
Equipment engineering	For configuring the analyzers. Among others, the analyzer-specific data is entered here, the type of validation is defined, and the number of measured values and units is entered.
Maxum software	Direct calling of the comprehensive Siemens configuration and operation software for Siemens Maxum edition II and MicroSAM. It is then possible to access the connected analyzers for maintenance, configuration, or viewing of chromatograms.

Validation

One of the core functions of the ASM is checking the analyzers for reliability of the measured values. Two different methods of measurement are available for recording the values, namely the reference sample method and the line sample method. The resulting values can be checked using different evaluation methods (based on ASTM D3764 or deviation). The objective of the validation is to recognize fluctuations and deviations with respect to a comparison value, and to thus permit a statement to be made on the reliability and drift of the measurement.

Method of measurement: reference sample method

The analyzer is disconnected from the process gas, and a reference gas connected for measurement. The composition of this reference gas has previously been specified in the "Reference bottle management" of the ASM. Using these values, the ASM determines the deviation between the measurement and the reference data.

Method of measurement: line sample method

With this method, a gas sample is extracted from the stream of sample gas to the analyzer, and analyzed in the laboratory. The resulting values are passed on to the ASM and compared with the analyzer's measured values. With this method, the analyzer need not be disconnected from the process gas, and permanently remains available for the process measurement.

Evaluation based on ASTM D3764

Based on the international standard ASTM D3764, the results are checked using various statistical methods, including standard deviation, Dixon freak value test, and systematic error.

Evaluation using deviation method

Limit values are defined for this evaluation: the warning limit and the control limit. Simple rules are used to define how the reliability of the measurement is to be assessed when these limits are violated. For example, it can be defined that a single violation of the limit can be tolerated, but that repeated violation is an impermissible condition.

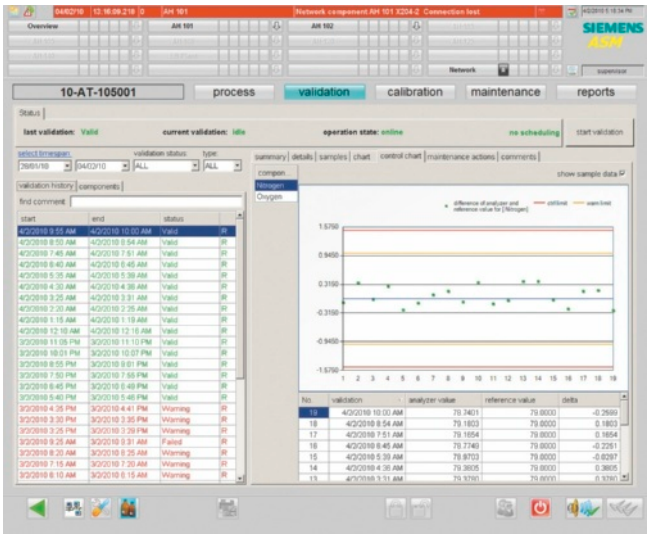

View of the validation module

Technical specifications

Operating system	• Windows XP Professional SP2/SP3 for client • Windows 2003 Server SP2
PC hardware requirements	
• Processor type (recommended)	• Server: dual core, 3 GHz • Client: Client: dual core, 2 GHz
• RAM (recommended)	• Server: 4 GB • Client: 2 GB1)
• Graphics card (recommended)	32 MB, 1280 x 1024[1)]
• Hard disk (recommended)	• Server: 2 x 160 GB (Raid 1) • Client: 80 GB
• Hard disk (free space for installation, recommended)	• Server: > 40 GB • Client: > 1.5 GB
• DVD-ROM/ USB port	For software installation

1) Hardware requirement when using Microsoft XP Professional

More information

Please contact your Siemens sales partner for further information and for ordering.